

Hong, Jae-Dong; Feng, Keli; Xie, Yuanchang

Article

A simulation-based robust biofuel facility location model for an integrated bio-energy logistics network

Journal of Industrial Engineering and Management (JIEM)

Provided in Cooperation with:

The School of Industrial, Aerospace and Audiovisual Engineering of Terrassa (ESEIAAT), Universitat Politècnica de Catalunya (UPC)

Suggested Citation: Hong, Jae-Dong; Feng, Keli; Xie, Yuanchang (2014) : A simulation-based robust biofuel facility location model for an integrated bio-energy logistics network, Journal of Industrial Engineering and Management (JIEM), ISSN 2033-0953, OmniaScience, Barcelona, Vol. 7, Iss. 5, pp. 1415-1432,
<https://doi.org/10.3926/jiem.1196>

This Version is available at:

<https://hdl.handle.net/10419/188663>

Standard-Nutzungsbedingungen:

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen (insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten, gelten abweichend von diesen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

Terms of use:

Documents in EconStor may be saved and copied for your personal and scholarly purposes.

You are not to copy documents for public or commercial purposes, to exhibit the documents publicly, to make them publicly available on the internet, or to distribute or otherwise use the documents in public.

If the documents have been made available under an Open Content Licence (especially Creative Commons Licences), you may exercise further usage rights as specified in the indicated licence.



<https://creativecommons.org/licenses/by-nc/3.0/>

A Simulation-Based Robust Biofuel Facility Location Model for an Integrated Bio-Energy Logistics Network

Jae-Dong Hong¹, Keli Feng¹, Yuanchang Xie²

¹*South Carolina State University (United States)*

²*University of Massachusetts Lowell (United States)*

jdhong@scsu.edu, kfeng1@scsu.edu, yuanchang_xie@uml.edu

Received: June 2014

Accepted: November 2014

Abstract:

Purpose: The purpose of this paper is to propose a simulation-based robust biofuel facility location model for solving an integrated bio-energy logistics network (IBLN) problem, where biomass yield is often uncertain or difficult to determine.

Design/methodology/approach: The IBLN considered in this paper consists of four different facilities: farm or harvest site (HS), collection facility (CF), biorefinery (BR), and blending station (BS). Authors propose a mixed integer quadratic modeling approach to simultaneously determine the optimal CF and BR locations and corresponding biomass and bio-energy transportation plans. The authors randomly generate biomass yield of each HS and find the optimal locations of CFs and BRs for each generated biomass yield, and select the robust locations of CFs and BRs to show the effects of biomass yield uncertainty on the optimality of CF and BR locations. Case studies using data from the State of South Carolina in the United State are conducted to demonstrate the developed model's capability to better handle the impact of uncertainty of biomass yield.

Findings: The results illustrate that the robust location model for BRs and CFs works very well in terms of the total logistics costs. The proposed model would help decision-makers find the most robust locations for biorefineries and collection facilities, which usually require huge

investments, and would assist potential investors in identifying the least cost or important facilities to invest in the biomass and bio-energy industry.

Originality/value: An optimal biofuel facility location model is formulated for the case of deterministic biomass yield. To improve the robustness of the model for cases with probabilistic biomass yield, the model is evaluated by a simulation approach using case studies. The proposed model and robustness concept would be a very useful tool that helps potential biofuel investors minimize their investment risk.

Keywords: bio-energy logistics network, robust biorefinery location, biomass yield, simulation approach

1. Introduction

Diverse and affordable energy is critical for the future of every country in the world. To reduce the dependence on foreign oil and also mitigate the environmental impacts (e.g., climate change, pollution) of using fossil fuel, a significant amount of research in the United States has recently been devoted to methods of producing biofuel. Less attention has been given to the cost of transporting bulky biomass feedstock to biorefinery plants. The biomass transportation cost is, however, significant compared to the biofuel production cost. For this reason, a majority of existing biorefinery plants in the United States are located in the Midwest where biomass, such as corn and soybean, is abundant.

With the soaring and unstable gasoline price and the increasing environmental concern, many other states in the U.S. are now seeking the opportunity to use biomass feedstocks, such as switchgrass, for producing biofuel. Also, under the Energy Independence and Security Act (EISA) of 2007, the United States Environmental Protection Agency (EPA) has developed a Renewable Fuel Standard Program (RFS) to ensure that gasoline in the U.S. contains a minimum percentage of renewable fuel. The latest RFS (2011) "*will increase the volume of renewable fuel required to be blended into gasoline from 9 billion gallons in 2008 to 36 billion gallons by 2022.*" Therefore, there is an immediate demand for biomass transportation cost analysis model to help locate new biorefineries optimally.

Some federal agencies in the United States have taken major steps since 2006 to implement the Advanced Energy Initiative rolled out by the US Government. The U.S. Department of Energy has announced plans to invest nearly \$1 billion in partnership with the private sector and academia to research, develop, and deploy advanced biofuel technologies by 2012. This includes up to \$272 million for commercial-scale BRs, up to \$240 million for demonstration

scale BRs working on novel refining processes, and more than \$400 million for bio-energy centers (2011).

The vast expansion in biofuels production and use mandated by EISA will require the development of new methods and equipment to collect, store, and pre-process biomass in a manner acceptable to biorefineries. These activities, which constitute as much as 20% of the current cost of finished cellulosic ethanol, are comprised of four main elements:

- Harvesters & collectors that remove feedstocks from cropland and out of forests.
- Storage facilities that provide a steady supply of biomass to the biorefinery, in a manner that prevents material spoilage.
- Preprocessing/grinding equipment that transforms feedstocks to the proper moisture content, bulk density, viscosity, and quality.
- Transportation of feedstocks and biofuels

In this study, we consider an integrated biomass and bio-energy logistics network consisting of four different types of facilities: a supply point - farm or harvest site (HS), a storage point - collection facility (CF), a production point - biorefinery (BR), and a demand point - blending station (BS). We assume that the locations of HS and BS are fixed and the demand of each BS is constant throughout the planning period. The logistics network structure is depicted in Figure 1. The inbound flows (solid arrows) in Figure 1 represent the collection, storage, and transportation of biomass, which can be of many types. The biomass collected at each HS is brought by trucks into a local CF. Smaller loads of biomass collected from the HS are temporarily stocked at the CF before they are consolidated and transported to a BR by large-capacity trucks for processing into biofuel. A CF is a potential site to store and preprocess (e.g., compress) biomass to a more valuable density and/or to pre-treat biomass to make a better quality biomass feedstock so that they can be transported in a more cost-effective way. In addition, a direct transportation of biomass from a HS to a BR is allowed and the resulting transportation cost is usually higher than going through the CF, since the direct shipping of biomass from a HS to the BR requires more space (due to the low biomass density) and more operations and preparation to be processed into biofuel. The outbound flows (dashed arrows) in Figure 1 show that biofuels are transported from BRs to BSs to be blended with fossil fuels before being distributed to gas stations. Given the locations of BSs and their demands, the transportation costs mainly depend on the proximity of BRs to BSs. In this logistics network, determining the locations of BRs and CFs will be the most important decision. This is because a BR usually requires several million dollars as the annualized construction and operation cost. Also, the use of CFs would affect the quality of biofuel that primarily depends upon the moisture content in the biomass (Dyken, Bakken & Skjelbred, 2010), letting alone the total transportation cost between HSs and BSs.

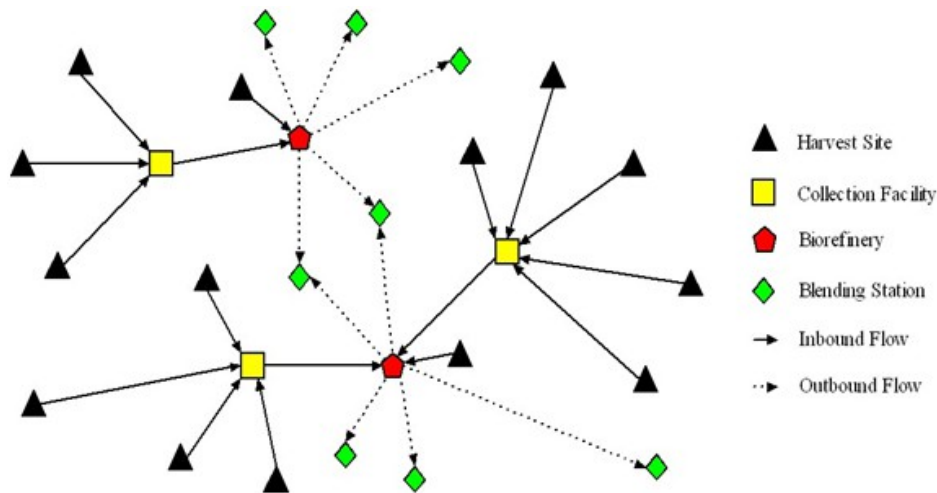


Figure 1. Schematic of Biomass/Bio-Energy Logistics Network

What complicates the decision of CF and BR locations is the uncertainty in biomass yield. Intuitively, different biomass yield scenarios will affect the optimality of a biofuel facility location plan. To develop a robust model, we first present a mixed integer quadratic program (MIQP) modeling approach to simultaneously determine the optimal locations of BRs and CFs and the transportation scheme for a given biomass yield scenario. We then investigate the effects of biomass yield on the optimality of the selected location by simulating the biomass yield of each HS, i.e., generating biomass yield for each HS using three probability distributions and finding the optimal locations of BRs and CFs for each yield scenario. Based on the simulation results, we identify the most frequently selected locations of BRs and CFs (referred to as 'robust locations',) for various biomass yields scenarios. By comparing the optimal solutions for the different biomass yield scenarios, a robust location is then identified.

2. Literature Review

Many existing studies have focused on bio-processing technologies to improve the biofuel yield and quality (Antonopoulou, Gavala, Skiadas, Angelopoulos & Lyberatos, 2008; Lee, Chou, Ham, Lee & Keasling, 2008; Ranganathan, Narasimhanm & Muthukumar, 2008; van Dyken, Bakken & Skjelbred, 2010; Weyens, Lelie, Taghavi, Newman & Vangronsveld, 2009). Although the cost of transporting bulky and unrefined biomass feedstock is also significant as compared to the total cost for producing biofuel, much less attention has been given to the understanding of biomass and bio-energy logistics systems and the reduction of biomass and bio-energy logistics costs.

In recent years, several biomass and bio-energy logistics studies have been conducted. Most of these existing studies focus either on the optimization of biorefinery locations (Celli, Ghiani, Loddo, Pilo & Pani, 2008; Graham, English & Noon, 2000; Panichelli & Gnansounou, 2008;

Perpiñá, Alfonso, Pérez-Navarro, Peñalvo, Vargas & Cárdenas, 2009; Steen, Kang, Bokinky, Hu, Schimer, McClure et al., 2010) or on the optimization and simulation of the biomass collection, storage, and transport operations (Frombo, Minciardi, Robba, Rosso & Sacile, 2009; Kumar & Sokhansanj, 2007; Rentizelas, Tolis & Tatsiopoulou, 2009; Sokhansanj, Kumar & Turhollow, 2006). Eksioglu, Acharya, Leightley and Arora (2009) investigate the integrated biomass and biofuel logistics network design, simultaneously taking into account the optimization of facility locations (e.g., collection facilities, biorefineries), transportation, and inventory control. In their paper, several critical issues are not adequately addressed: for instance, how the uncertainty in biomass yield affects the robustness and optimality of the logistics network design and how to develop efficient heuristic algorithms to solve the formulated logistics model, which typically is an NP-hard problem.

The remaining of the paper is organized as follows. Section 3 introduces an integrated facility location and transportation model in detail. Following the description of the model formulation, case studies are conducted and analysis for simulation results is presented in section 4. Section 5 summarizes the developed models and research findings. It also provides recommendations for future research directions.

3. Development of Integrated Optimization Model

We propose the integrated optimization mathematical model by modifying the model (Eksioglu et al., 2009). In our proposed model, we assume that CFs can be located at any HS and a biorefinery (BR) can only be built at candidate BR location, since BR locations must satisfy some realistic requirements. This is a reasonable assumption at the planning stage for the bio-energy logistics model. It may be difficult to decide potential CF locations which are not HSs, since the assignment of HSs to a CF is not known.

Let F be the set of all harvesting sites (HSs) and potential collection facility (CF) locations, indexed by f . Now, let J , I , and K respectively be the set of CFs, BRs, and BSs, indexed by j , i , and k . Also, let L and G respectively be the set of capacities of BR and CF, indexed by l and g . The parameters used in this formulation are the following: ψ_{ij}^b is amortized annual cost of constructing and operating a BR_i with the l^{th} size; ψ_{jg}^c is amortized annual cost of constructing and operating a CF_j with the g^{th} size; C_l^b and C_g^c denote the actual capacity of l^{th} and g^{th} size of BR and CF, respectively; β_f and γ_f are conversion rates to bio-energy of biomass feedstock shipped from CF to BR and from HS to BR, respectively; S_f denotes the yield of biomass feedstock from HS_f ; D_k is the demand of biofuel for BS_k ; δ_i is the maximum number of HSs that ship biomass directly to BR_i ; d_{fj}^1 , d_{fi}^2 , d_{ji}^3 and d_{ik}^4 are unit transportation cost (UTC) from HS_f to CF_j , from HS_f to BR_i , from CF_j to BR_i , and from BR_i to BS_k , respectively. In this study, we set

$d_{fi}^2 = \alpha \cdot d_{fj}^1$, $\alpha \geq 1$ to denote a higher unit transportation cost for shipping biomass from HS_f directly to BR_i .

The decision variables used in the mixed integer quadratic programming (MIQP) formulation are the following: x_{il}^b is a binary variable that equals 1 if a biorefinery of size l is located in site i , and 0 otherwise; x_{jg}^c is a binary variable that equals 1 if a collection facility of size g is located in site j , and 0 otherwise; y_{fj}^1 is a binary variable that equals 1 if HS_f 's yielded biomass shipped to CF_j and 0 otherwise; y_{fi}^2 is a binary variable that equals 1 if HS_f ships biomass directly to BR_i , and 0 otherwise; y_{ji}^3 is a binary variable that equals to 1 if CF_j is assigned to BR_i , and 0 otherwise; y_{ik}^4 is the fraction of BR_i ' produced biofuel shipped to BS_k ; y_{mk}^4 is the fraction of demand for BS_k that must be satisfied by a dummy BR_m , for the occurrence of shortage, that is, the total demand of all BSs cannot be met because the total supply from all BRs is not enough, and 0 otherwise.

Letting N_b and N_c denote the maximum number of BRs and CFs to be built, we formulate the following MIQP model that minimizes the total logistics cost (TLC), which is the sum of the annualized construction and operation cost for CFs and BRs and the transportation costs from HSs to CFs, HSs to BRs, CFs to BRs, and BRs to BSs:

$$\text{Minimize TLC} = \left[\sum_{i \in I} \sum_{l \in L} \psi_{il}^b x_{il}^b + \sum_{j \in J} \sum_{g \in G} \psi_{jg}^c x_{jg}^c \right] + \left[\sum_{j \in J} \sum_{f \in F} S_f d_{fj}^1 y_{fj}^1 + \sum_{i \in I} \sum_{f \in F} S_f d_{fi}^2 y_{fi}^2 \right] + \left[\sum_{i \in I} \sum_{j \in J} \left(\sum_{f \in F} S_f y_{fj}^1 \right) d_{ji}^3 y_{ji}^3 \right] + \left[\sum_{i \in I} \sum_{k \in K} D_k d_{ik}^4 y_{ik}^4 \right] \quad (1)$$

$$X_i^b = \sum_{l \in L} x_{il}^b, \quad \forall i \in I \quad (2)$$

$$X_j^c = \sum_{g \in G} x_{jg}^c, \quad \forall j \in J \quad (3)$$

$$\sum_{i \in I} X_i^b \leq N_b, \quad (4)$$

$$\sum_{j \in J} X_j^c \leq N_c, \quad (5)$$

$$\sum_{j \in M} y_{fj}^1 + \sum_{i \in I} y_{fi}^2 = 1, \quad \forall f \in F \quad (6)$$

$$X_j^c u_j \leq \sum_{f \in F} y_{fj}^1 \leq X_j^c U_j, \quad \forall j \in J \quad (7)$$

$$\sum_{f \in F} S_f y_{fj}^1 \leq \sum_{g \in G} C_g^c x_{jg}^c, \quad \forall j \in J \quad (8)$$

$$\sum_{j \in J} \sum_{f \in F} \beta_f S_f y_{fj}^1 y_{ji}^3 + \sum_{f \in F} \gamma_f S_f y_{fi}^2 \leq \sum_{l \in L} C_l^b x_{il}^b, \quad i \in I \quad (9)$$

$$\sum_{i \in I} y_{ji}^3 = X_j^c, \quad \forall j \in M \quad (10)$$

$$\sum_{f \in F} y_{fi}^2 \leq \sum_{l \in L} \delta_l x_{il}^b, \quad \forall i \in I, \quad (11)$$

$$\sum_{i \in I} \left(\sum_{j \in J} \sum_{f \in F} \beta_f S_f y_{fj}^1 y_{ji}^3 + \sum_{f \in F} \gamma_f S_f y_{fi}^2 \right) \geq \sum_{k \in K} D_k (y_{ik}^4 + y_{mk}^4), \quad (12)$$

$$\sum_{i \in I} y_{ik}^4 + y_{mk}^4 = 1, \quad \forall k \in K. \quad (13)$$

Constraints (2) and (3) ensure that a BR and a CF of size l and g are located in sites i and j . Constraints (4) and (5) require that at most N_b BRs and N_c CFs can be constructed. Constraints (6) ensure that each HS is assigned to a CF or a BR. Constraints (7) ensure that each selected CF should cover at least u_j and at most u_j HSs (set to 2 and 10 in this study). Constraints (8) are capacity constraint for CFs, that is, the amount of biomass a CF receives should not exceed its capacity. Constraints (9) are capacity constraint for BRs, that is, the amount of biofuel a BR can produce should not exceed its capacity. Constraints (10) ensure that a CF supplies biomass to the selected BR sites only. Constraints (11) ensure that at most δ_i HS is directly covered by BR_i . Constraints (12) and (13) ensure that the total amount of biofuel converted from biomass by all BRs is enough to satisfy the total demand of biofuel for all BSs. If not, a dummy biorefinery, BR_m , is added to satisfy the shortage.

To solve the above MIQP problem, letting $z_{fji} = y_{fj}^1 y_{ji}^3$ to linearize the term $y_{fj}^1 y_{ji}^3$ in Equations (1), (9) and (11), we add the following:

$$\text{Max} \{0, y_{fj}^1 + y_{ji}^3 - 1\} \leq z_{fji} \leq y_{fj}^1, \quad \forall i \in I, \forall j \in J. \quad (14)$$

Hereafter, this newly introduced model given by Equations (1)-(14) is referred to as the Integrated Biofuel Facility Location (IBFL) model.

4. Case Study

We conduct a case study using the scenario illustrated in Figure 2 (EPA Tracked Sites in South Carolina with Biorefinery Facility Siting Potential, 2013). Fifteen (15) counties, whose biomass resources are classified 'good' or better as shown in Figure 2, are selected as the harvesting sites (HSs). Then, one city is chosen from each county using a centroid approach and is considered a candidate location for collection facility (CF). Five (5) locations and ten locations (10) throughout South Carolina are considered as candidate sites for BRs and blending stations (BSs), respectively, as shown in Figure 3. The potential locations for BRs are selected based upon low population density, easy access to interstate highways, etc.

Although not shown in Figure 3, the actual distances among cities representing HSs, CFs, BRs, and BF, are calculated. Table 1a shows the demands (in thousand gallons) for all BSs. These demands are hypothetical values and can be readily replaced by true demand data for real-world applications. The values of the input parameters are summarized in Table 1b. Based on these input data, an Excel Spreadsheet model is developed. Excel Analytic Solver Platform with VBA (Visual Basic for Applications) is used to solve the proposed model.

To simulate the uncertainty in biomass yields, we randomly generate biomass yield for each HS using three popular probability distributions. The minimum and maximum biomass yield values for each HS are obtained from the ranges shown in Figure 2. The probability distributions considered in this paper are normal distribution, uniform distribution, and triangular distribution.

EPA Tracked Sites in South Carolina with Biorefinery Facility Siting Potential

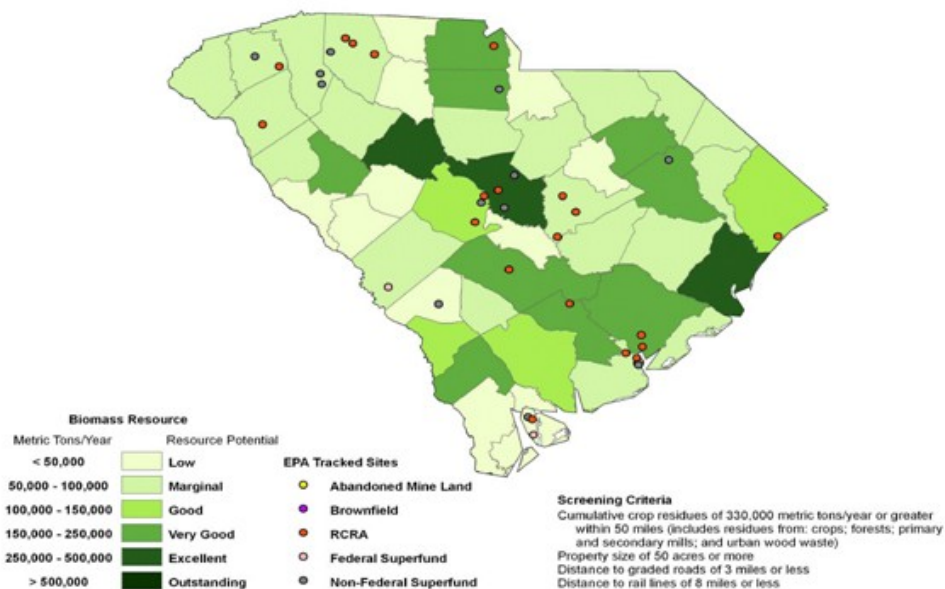


Figure 2. Candidate Harvesting Sites, Collection Facility, and Biorefinery

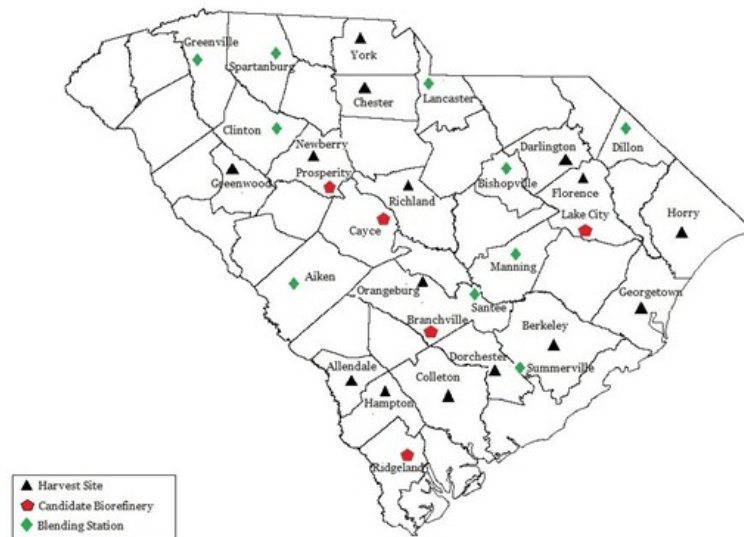


Figure 3. Candidate Biorefinery, Harvesting Sites, and Blending Stations

No.	Blending Station	Demand(in 1000 gallons)
1	Aiken	300
2	Bishopville	200
3	Clinton	300
4	Dillon	150
5	Greenville	150
6	Lancaster	200
7	Manning	250
8	Santee	150
9	Spartanburg	300
10	Summerville	200

Table 1a. Demand for Blending Station

Symbol	Meaning	Value
ψ_{il}^b	Amortized annual cost of constructing and operating a BR_i with the l^{th} size	\$0.7M, \$0.8M, and \$1M for $l=1, 2, 3$.
ψ_{jg}^c	Amortized annual cost of constructing and operating a CF_j with the g^{th} size	\$120K, \$150K, and \$200K for $g=1, 2, 3$.
C_l^b	Actual capacity of l^{th} size of BR	500K, 800K, 1M gallons for $l=1, 2, 3$.
C_g^c	Actual capacity of g^{th} size of CF	400K, 800K, 1M tons for $g=1, 2, 3$.
β_r	Conversion rates to bio-energy of biomass feedstock shipped from CF to BR	70%
γ_r	Conversion rates to bio-energy of biomass feedstock shipped from HS to BR	50%
δ_i	Maximum number of HSs that ship biomass directly to BR_i	1
N_b	Maximum number of BRs to be built	3
N_c	Maximum number of CFs to be built	6
d_{fj}^1	Unit transportation cost (UTC) from HS_r to CF_j	\$0.08/mile/K metric tons
d_{ri}^2	Unit transportation cost (UTC) from HS_r to BR_i	$2 * d_{fj}^1$
d_{ji}^3	Unit transportation cost (UTC) from CF_j to BR_i	\$0.04/mile/K metric tons
d_{ik}^4	Unit transportation cost (UTC) from BR_i to BS_k	\$0.01/mile/K gallons

Table 1b. Input Data Used for Case Study

Case 1. Normal Distribution: in this case, the mean biomass yield at HS_r , μ_r , and its standard deviation, σ_r , are obtained from

$$\mu_r = (w_r + W_r)/2 \quad (15)$$

and

$$\sigma_r = (W_r - w_r)/6 \quad (16)$$

where w_r and W_r denote minimum and maximum amounts of biomass yield at HS_r shown in Figure 2. To derive Equation (16), we assume that w_r and W_r are located at three standard deviations on either side of its mean.

Case 2. Uniform Distribution: we use the minimum, w_r , and maximum value, W_r for the parameters of the uniform distribution.

Case 3. Triangular Distribution: two skewed distributions are considered for biomass yield. The first one is a right-skewed distribution. Its mode, $O_{(r)f}$, is located at

$$O_{(r)f} = w_r + (W_r - w_r)/4 \quad (17)$$

The other one is a left-skewed distribution. Its mode, $O_{(l)f}$, is located at

$$O_{(l)f} = W_r - (W_r - w_r)/4 \quad (18)$$

For Equations (17) and (18), we assume that a mode is located at $(W_r - w_r)/4$ to the right side of the minimum amount (w_r) for the right-skewed distribution and to the left side of the maximum amount (W_r) for the left-skewed distribution, respectively.

5. Numerical Results and Observations

We assume shortage costs to be equal to zero, since the occurrence of biofuel shortage would not affect the optimal locations of BRs and CFs. We solve the developed model for forty (40) different sets of simulated biomass yields for each probability distribution and present the frequencies of BR and CF to be included in the optimal solutions in Tables 2a through 2d. '1' for BR location columns in these tables denotes that this location is selected in the optimal solution and '0' otherwise. For the case of normal distribution (see Table 2a), the frequencies for selected BR location set 1 {Branchville, Cayce} and BR location set 2 {Prosperity, Cayce} are 23 and 17, respectively, whereas for the case of uniform distribution, the frequencies for BR location set 1 {Branchville, Cayce} and BR location set 2 {Prosperity, Cayce} are exactly same (see Table 2b). However, for the skewed triangle distribution case, one BR location set is dominant over the other. For the right-skewed triangle distribution, the simulated biomass yields are more likely to be less than the middle value of w_f and W_f . Due to this, the BR location set 2 {Prosperity, Cayce} is selected more frequently (33 times out of 40) as shown in Table 2c, whereas the BR location set 1 {Branchville, Cayce} is selected more frequently (36 times out of 40) for the left-skewed distribution as shown in Table 2d.

The selected locations of CFs depend upon the locations of BRs. As the results in Tables 2a through 2d and Table 3 suggest, when the BR location set 1 {Branchville, Cayce} is chosen, the CF location set {Colleton, Dorchester, Newberry, Orangeburg, Richland} is selected 83 times out of 86 (see Table 3). Given that the BR location set 2 {Prosperity, Cayce} is selected, the CF location set {Chester, Newberry, Orangeburg, Richland} is selected 39 times out of 73. The total capacity of these four (4) CF locations is sometimes insufficient. Therefore, the second most frequent CF location set, {Chester, Newberry, Orangeburg, Richland, Darlington} selected 16 times out of 17, is considered. From Table 3, we observe that two CF candidates, {Orangeburg, Richland}, are always selected regardless of the types of distribution or the selected BR locations. Another candidate CF location, {Newberry}, is selected 158 times out of 160. From now on, we refer to the location {(Branchville, Cayce), (Colleton, Dorchester, Newberry, Orangeburg, Richland)} as 'Robust Location 1' and {(Prosperity, Cayce), (Chester, Newberry, Orangeburg, Richland, Darlington)} as 'Robust Location 2,' respectively.

To evaluate the efficiency of Robust Locations 1 and 2, we consider the following extreme scenarios:

Scenario I: Each HS yields the minimum amount of biomass, w_f , $\forall f \in F$.

Scenario II: Each HS yields the middle amount of biomass, $(w_f + W_f)/2$, $\forall f \in F$.

Scenario III: Each HS yields the maximum amount of biomass, W_f , $\forall f \in F$.

	Biorefinery					Frequency
Combination of location selected	Branchville	Cayce	Lake City	Prosperity	Ridgeland	
1	1	1	0	0	0	23
2	0	1	0	1	0	17
Average capacity (in 1000 gallons)	1670	1860	0	1836	0	

	Collection Facility							
Location selected	Allendale	Chester	Colleton	Darlington	Dorchester	Newberry	Orangeburg	Richland
Frequency	3	16	23	5	23	40	40	40
Average capacity (in 1000 Metric Tons)	500	631	526	760	947	885	995	1000

Selected location for biorefinery	Selected location for collection facility					Frequency
Branchville Cayce	Colleton, Dorchester, Newberry, Orangeburg, Richland					23
Prosperity Cayce	Chester, Newberry, Orangeburg, Richland					9
Prosperity Cayce	Chester, Darlington, Newberry, Orangeburg, Richland					4
Prosperity Cayce	Allendale, Chester, Newberry, Orangeburg, Richland					3
Prosperity Cayce	Darlington, Newberry, Orangeburg, Richland					1
	Total					40

Table 2a. Simulation Results of Locations of Biorefinery and Collection Facility for Case 1
(Normal Distribution)

	Biorefinery					Frequency
Combination of location selected	Branchville	Cayce	Lake City	Prosperity	Ridgeland	
1	1	1	0	0	0	20
2	0	1	0	1	0	20
Average capacity (in 1000 gallons)	1760	1830	0	1780	0	

	Collection Facility							
Location selected	Allendale	Chester	Colleton	Darlington	Dorchester	Newberry	Orangeburg	Richland
Frequency	5	20	19	6	20	39	40	40
Average capacity (in 1000 Metric Tons)	500	590	579	500	920	895	995	1000

Selected location for biorefinery	Selected location for collection facility					Frequency
Branchville Cayce	Colleton, Dorchester, Newberry, Orangeburg, Richland					18
Prosperity Cayce	Chester, Newberry, Orangeburg, Richland					7
Prosperity Cayce	Chester, Darlington, Newberry, Orangeburg, Richland					6
Prosperity Cayce	Allendale, Chester, Newberry, Orangeburg, Richland					5
Branchville Cayce	Colleton, Dorchester, Orangeburg, Richland					2
Prosperity Cayce	Etc.					2
	Total					40

Table 2b. Simulation Results of Locations of Biorefinery and Collection Facility for Case 2
(Uniform Distribution)

	Biorefinery					Frequency
Combination of location selected	Branchville	Cayce	Lake City	Prosperity	Ridgeland	
1	1	1	0	0	0	7
2	0	1	0	1	0	33
Average capacity (in 1000 gallons)	1828	1770	0	1830	0	

	Collection Facility							
Location selected	Allendale	Chester	Colleton	Darlington	Dorchester	Newberry	Orangeburg	Richland
Frequency	3	32	7	4	7	39	40	40
Average capacity (in 1000 Metric Tons)	500	632	543	625	914	969	990	1000

Selected location for biorefinery		Selected location for collection facility	Frequency
Prosperity	Cayce	Chester, Newberry, Orangeburg, Richland	23
Branchville	Cayce	Colleton, Dorchester, Newberry, Orangeburg, Richland	6
Prosperity	Cayce	Chester, Darlington, Newberry, Orangeburg, Richland	4
Prosperity	Cayce	Allendale, Chester, Newberry, Orangeburg, Richland	3
Branchville	Cayce	Etc.	4
Prosperity	Cayce		
Total			40

Table 2c. Simulation Results of Locations of Biorefinery and Collection Facility for Case 3
(Right-Skewed Triangle Distribution)

	Biorefinery					Frequency
Combination of location selected	Branchville	Cayce	Lake City	Prosperity	Ridgeland	
1	1	1	0	0	0	36
2	0	1	0	1	0	3
3	1	0	0	1	0	1
Average capacity (in 1000 gallons)	1870	1734	0	1800	0	

	Collection Facility							
Location selected	Allendale	Chester	Colleton	Darlington	Dorchester	Newberry	Orangeburg	Richland
Frequency	1	3	37	2	37	40	40	40
Average capacity (in 1000 Metric Tons)	500	600	616	500	978	820	995	995

Selected location for biorefinery		Selected location for collection facility	Frequency
Branchville	Cayce	Colleton, Dorchester, Newberry, Orangeburg, Richland	36
Prosperity	Cayce	Chester, Darlington, Newberry, Orangeburg, Richland	2
Prosperity	Cayce	Allendale, Chester, Newberry, Orangeburg, Richland	1
Branchville	Prosperity	Colleton, Dorchester, Newberry, Orangeburg, Richland	1
Total			40

Table 2d. Simulation Results of Locations of Biorefinery and Collection Facility for Case 3
(Left-Skewed Triangle Distribution)

	Biorefinery					Frequency
Combination of location selected	Branchville	Cayce	Lake City	Prosperity	Ridgeland	
1	1	1	0	0	0	86
2	0	1	0	1	0	73
3	1	0	0	1	0	1
Average capacity (in 1000 gallons)	1787	1799	0	1816	0	

	Collection Facility							
Location selected	Allendale	Chester	Colleton	Darlington	Dorchester	Newberry	Orangeburg	Richland
Frequency	12	71	86	17	87	158	160	160
Average capacity (in 1000 Metric Tons)	500	619	578	556	961	861	995	997

Selected location for biorefinery	Selected location for collection facility				Frequency
Branchville Cayce	Colleton, Dorchester, Newberry, Orangeburg, Richland				83
Prosperity Cayce	Chester, Newberry, Orangeburg, Richland				39
Prosperity Cayce	Chester, Darlington, Newberry, Orangeburg, Richland				16
Prosperity Cayce	Allendale, Chester, Newberry, Orangeburg, Richland				12
Prosperity Cayce Branchville Cayce	Etc.				10
	Total				160

Table 3. Summary of Simulation Results of Locations of Biorefinery and Collection Facility

In Table 4, we compare the optimal solutions of each simulated biomass yield scenario with Robust Location 1 and Robust Location 2. We also report the percentage deviation (PD) of Robust 1 and Robust 2 from the optimal solution for each scenario. As expected from Tables 2 and 3 and seen in Table 4, for Scenario I, which is an extreme case of the right skewed distribution, Robust 2 performs better than Robust 1. For Scenario III, an extreme case of the left skewed distribution, Robust 1 outperforms Robust 2. For Scenario II, both Robust 1 and Robust 2 perform well compared to the optimal solution, since the PDs yielded by Robust 1 and Robust 2 are 0% and 0.04%. In terms of the maximum PD (MXPD) for all scenarios, Robust 1 with 11.4% performs better than Robust 2 with 18.3%. On the average of PD (AVPD), Robust 1 with 6.3% performs slightly better than Robust 2 with 7.3%, which is consistent with the results shown in Table 3.

6. Summary and Conclusions

In this paper, we develop an IBFL (Integrated Biofuel Facility Location) model to simultaneously find the optimal locations of collection facilities (CFs) and biorefineries (BRs) for a biomass and bio-energy logistics network. We formulate the proposed model as a mixed integer quadratic program (MIQP), construct an Excel spreadsheet model, and solve it using Excel Analytic

Solver Platform with VBA (Visual Basic for Applications). For the biomass and bio-energy logistics network, the uncertainty in biomass yield has been a critical factor for determining the optimal locations of BRs and CFs, since it significantly affects the logistics network operational costs. To demonstrate the developed model's capability and to evaluate the effects of the uncertainty in biomass yield, a case study is conducted using the data from United States EPA as shown in Figure 2. We simulate the biomass yield uncertainty by randomly generating biomass yield for each HS using normal, uniform, and triangular probability distributions. We then find the optimal locations of BRs and CFs for each generated set of biomass yield data.

Scenario		Optimal	Robust 1	Robust 2
I (Each HS yields the minimum amount of biomass)	BR Location	1. Prosperity 2. Cayce	1. Branchville 2. Cayce	1. Prosperity 2. Cayce
	CF Location	1. Newberry 2. Orangeburg 3. Richland	1. Colleton 2. Dorchester 3. Newberry 4. Orangeburg 5. Richland	1. Chester 2. Newberry 3. Orangeburg 4. Richland 5. Darlington
	TLC (PD)	\$7,834.54	\$8,726.16 (11.4%)	\$8,018.08 (2.3%)
II (Each HS yields the middle amount of biomass)	BR Location	1. Branchville 2. Cayce	1. Branchville 2. Cayce	1. Prosperity 2. Cayce
	CF Location	1. Colleton 2. Dorchester 3. Newberry 4. Orangeburg 5. Richland	1. Colleton 2. Dorchester 3. Newberry 4. Orangeburg 5. Richland	1. Chester 2. Newberry 3. Orangeburg 4. Richland 5. Darlington
	TLC (PD)	\$8,130.64	\$8,130.64 (0%)	\$8,134.30 (0.04%)
III (Each HS yields the maximum amount of biomass)	BR Location	1. Branchville 2. Prosperity	1. Branchville 2. Cayce	1. Prosperity 2. Cayce
	CF Location	1. Chester 2. Colleton 3. Dorchester 4. Orangeburg 5. Richland	1. Colleton 2. Dorchester 3. Newberry 4. Orangeburg 5. Richland	1. Chester 2. Newberry 3. Orangeburg 4. Richland 5. Darlington
	TLC (PD)	\$9,075.30	\$9,757.85 (7.5%)	\$10,737.18 (18.3%)
	Average (PD)	\$8,346.83	\$8,871.55 (6.3%)	\$8,963.18 (7.3%)

*PD stands for percentage deviation, (TLC yielded by Robust location – Optimal TLC)/Optimal TLC

Table 4. Comparison between Results of Optimal and Robust Locations

Based on the simulation results, we identify some most frequently chosen locations of BRs and CFs, which are referred to as 'Robust Locations,' for the randomly generated biomass yields. To evaluate the capability of 'Robust Locations' to deal with the uncertainties in biomass yield, we select two sets of robust locations, 'Robust Location 1' and Robust Location 2'. They are applied to three extreme scenarios and their solutions are compared against the corresponding optimal solutions. We find that the two robust locations work well in terms of the total logistics costs.

Thus, the model developed in this paper would help decision-makers find the robust locations of biorefinery and collection facility, which require huge investments, and would assist the potential investors in identifying the most profitable or important facilities to invest in the biomass and bio-energy industry. This model could be a very useful tool that helps them minimize the investment risk.

For future research, it would be necessary to consider truck routing for collecting less-than-truckload biomass from farms, as this very likely could lead to improved transportation efficiency in the biomass collection process.

Acknowledgement

This research is supported by the 1890 Institution Teaching, Research and Extension Capacity Building Grants of National Institute of Food Agriculture (NIFA), US Department of Agriculture, under Grant No. 2010-38821-21595.

References

- Antonopoulou, G., Gavala, H. N., Skiadas, L.V., Angelopoulos, K., & Lyberatos, G. (2008). Biofuel generation from sweet sorghum: fermentative hydrogen production and anaerobic digestion of the remaining biomass. *Bioresource Technology*, 99(1), 110-119.
<http://dx.doi.org/10.1016/j.biortech.2006.11.048>
- Celli, G., Ghiani, E., Loddo, M., Pilo, F., & Pani, S. (2008). Optimal location of biogas and biomass generation plants. In *Proceedings of the 43rd International Universities Power Engineering Conference*, Padova, Italy, 1-6.
- Eksioglu, S.D., Acharya, A., Leightley, L.E., & Arora, S. (2009). Analyzing the design and management of biomass-to-biorefinery supply chain. *Computers & Industrial Engineering*, 57(4), 1342-1352. <http://dx.doi.org/10.1016/j.cie.2009.07.003>
- EPA Tracked Sites in South Carolina with Biorefinery Facility Siting Potential (2013). Retrieved June 15, 2013, from www.epa.gov/renewableenergyland/maps/pdfs/biorefinery_sc.pdf.
- Frombo, F., Minciardi, R., Robba, M., Rosso, F., & Sacile, R. (2009). Planning woody biomass logistics for energy production: A strategic decision model. *Biomass and Bioenergy*, 33(3), 372-383. <http://dx.doi.org/10.1016/j.biombioe.2008.09.008>

- Graham, R.L., English, B.C., & Noon, C.E. (2000). A Geographic Information System-based modeling system for evaluating the cost of delivered energy crop feedstock. *Biomass and Bioenergy*, 18(5), 309-329. [http://dx.doi.org/10.1016/S0961-9534\(99\)00098-7](http://dx.doi.org/10.1016/S0961-9534(99)00098-7)
- Kumar, A., & Sokhansanj, S. (2007). Switchgrass (*Panicum virgatum*, L.) delivery to a biorefinery using integrated biomass supply analysis and logistics (IBSAL) model. *Bioresource Technology*, 98(5), 1033-1044. <http://dx.doi.org/10.1016/j.biortech.2006.04.027>
- Lee, S.K., Chou, H., Ham, T. S., Lee, T.S., & Keasling, J.D. (2008). Metabolic engineering of microorganisms for biofuel production: from bugs to synthetic biology to fuels. *Current Opinions in Biotechnology*, 19(6), 556-563. <http://dx.doi.org/10.1016/j.copbio.2008.10.014>
- Panichelli, L., & Gnansounou, E. (2008). GIS-based approach for defining bioenergy facilities location: A case study in Northern Spain based on marginal delivery costs and resources competition between facilities. *Biomass and Bioenergy*, 32(4), 289-300.
<http://dx.doi.org/10.1016/j.biombioe.2007.10.008>
- Perpiñá, C., Alfonso, D., Pérez-Navarro, A., Peñalvo, E., Vargas, C., & Cárdenas, R. (2009). Methodology based on Geographic Information Systems for biomass logistics and transport optimization. *Renewable Energy*, 34(3), 555-565. <http://dx.doi.org/10.1016/j.renene.2008.05.047>
- Ranganathan, S.V., Narasimhan, S.N., & Muthukumar, K. (2008). An overview of enzymatic production of biodiesel. *Bioresource Technology*, 99(10), 3975-3981.
<http://dx.doi.org/10.1016/j.biortech.2007.04.060>
- Rentizelas, A.A., Tolis, A.J., & Tatsiopoulos, L.P. (2009). Logistics issues of biomass: The storage problem and the multi-biomass supply chain. *Renewable and Sustainable Energy Reviews*, 13(4), 887-894. <http://dx.doi.org/10.1016/j.rser.2008.01.003>
- Sokhansanj, S., Kumar, A., & Turhollow, A.F. (2006). Development and implementation of integrated biomass supply analysis and logistics model (IBSAL). *Biomass and Bioenergy*, 30(10), 838-847. <http://dx.doi.org/10.1016/j.biombioe.2006.04.004>
- Steen, E.J., Kang, Y., Bokinsky, G., Hu, Z., Schirmer, A., McClure et al., (2010). Microbial production of fatty-acid-derived fuels and chemicals from plant biomass. *Nature*, 43, 559-562. <http://dx.doi.org/10.1038/nature08721>
- United States Environmental Protection Agency, Renewable Fuel Standard Program (2011). Retrieved, July 23, 2011, from <http://www.epa.gov/otaq/fuels/renewablefuels/index.htm>
- van Dyken, S., Bakken, B.H., & Skjelbred, H.I. (2010). Linear mixed integer models for biomass supply chains with transport, storage and processing. *Energy*, 35 (3), 1338-1350. <http://dx.doi.org/10.1016/j.energy.2009.11.017>

Weyens, N., Lelie, D., Taghavi, S., Newman, L., & Vangronsveld, J. (2009). Exploiting plant-microbe partnerships to improve biomass production and remediation. *Trends in Biotechnology*, 27(10), 591-598. <http://dx.doi.org/10.1016/j.tibtech.2009.07.006>

Journal of Industrial Engineering and Management, 2014 (www.jiem.org)



Article's contents are provided on a Attribution-Non Commercial 3.0 Creative commons license. Readers are allowed to copy, distribute and communicate article's contents, provided the author's and Journal of Industrial Engineering and Management's names are included.

It must not be used for commercial purposes. To see the complete license contents, please visit

<http://creativecommons.org/licenses/by-nc/3.0/>.