

Gomes, João; Domingues, Eva; Gmurek, Marta; Quinta-Ferreira, Rosa M.;
Martins, Rui Cunha

Article

Advanced oxidation processes for recalcitrant compounds removal comparison with biofiltration by *Corbicula fluminea*

Energy Reports

Provided in Cooperation with:

Elsevier

Suggested Citation: Gomes, João; Domingues, Eva; Gmurek, Marta; Quinta-Ferreira, Rosa M.;
Martins, Rui Cunha (2020) : Advanced oxidation processes for recalcitrant compounds removal
comparison with biofiltration by *Corbicula fluminea*, Energy Reports, ISSN 2352-4847, Elsevier,
Amsterdam, Vol. 6, Iss. 1, pp. 666-671,
<https://doi.org/10.1016/j.egyr.2019.09.047>

This Version is available at:

<https://hdl.handle.net/10419/243806>

Standard-Nutzungsbedingungen:

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen
Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle
Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich
machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen
(insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten,
gelten abweichend von diesen Nutzungsbedingungen die in der dort
genannten Lizenz gewährten Nutzungsrechte.

Terms of use:

*Documents in EconStor may be saved and copied for your
personal and scholarly purposes.*

*You are not to copy documents for public or commercial
purposes, to exhibit the documents publicly, to make them
publicly available on the internet, or to distribute or otherwise
use the documents in public.*

*If the documents have been made available under an Open
Content Licence (especially Creative Commons Licences), you
may exercise further usage rights as specified in the indicated
licence.*



<https://creativecommons.org/licenses/by-nc-nd/4.0/>



6th International Conference on Energy and Environment Research, ICEER 2019, 22–25 July,
University of Aveiro, Portugal

Advanced oxidation processes for recalcitrant compounds removal comparison with biofiltration by *Corbicula fluminea*

João Gomes^{a,*}, Eva Domingues^a, Marta Gmurek^{a,b}, Rosa M. Quinta-Ferreira^a,
Rui C. Martins^a

^a CIEPQPF, University of Coimbra, Rua Sílvio Lima 3030-790, Coimbra, Portugal

^b Faculty of Process and Environmental Engineering, Lodz University of Technology, Wolczanska 213, 90-924 Lodz, Poland

Received 27 July 2019; accepted 16 September 2019

Available online 21 October 2019

Abstract

Conventional treatments cannot remove the emerging contaminants due to their refractory character, therefore improved methodologies should be applied for obtaining their total removal. The need of development of suitable technologies to treat these recalcitrant compounds is related with the wastewater reclamation. Advanced oxidation technologies such as photocatalysis and ozonation appear as suitable solutions for recalcitrant compounds removal. Moreover, the biofiltration can be applied as a pest management approach integrated with wastewater treatment. Due to the invasive character of *Corbicula fluminea* their usage as biofilter hosts can work as a reduction of their impact over native species or industrial damage. These methodologies were used to promote the degradation of a mixture of SMX, CBZ and LRZ at initial concentration of 1 mg/L of each one. Single ozonation was capable to remove totally SMX and CBZ in 5 min. Whereas only 50% of LRZ were removed in 60 min. The weather can affect the sunlight radiation photon flux which will promote impact on the photocatalytic oxidation using 1 wt% of Ag and Pd-TiO₂ as catalysts, for SMX, CBZ and LRZ abatement. *C. fluminea* was capable to remove about 30% of CBZ and LRZ in 24h.

© 2019 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 6th International Conference on Energy and Environment Research, ICEER 2019.

Keywords: Biofiltration; *Corbicula fluminea*; Photocatalytic oxidation; Ozonation; Sunlight radiation

1. Introduction

Modern society faces one of the major drawbacks of this century: water scarcity. Global warming and the exponential growth of population are considered as the main reasons for this problematic. Therefore, thinking on the minimization of impact of the scarcity of this resource, wastewater reclamation should be and option to be exploited [1]. However, the precautionary principle imposes that care must be taken in what regards the presence

* Corresponding author.

E-mail address: jgomes@eq.uc.pt (J. Gomes).

<https://doi.org/10.1016/j.egy.2019.09.047>

2352-4847/© 2019 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 6th International Conference on Energy and Environment Research, ICEER 2019.

Nomenclature

AOPs	Advanced oxidation processes
CBZ	Carbamazepine
CEC	Contaminants of emerging concern
CPC	Compound parabolic collector
LRZ	Lorazepam
SMX	Sulfamethoxazole
TOD	Transferred ozone dose

of micropollutants in the recovered water so that its safety may be ensured. CEC appear on the water sources at different concentrations. In fact, CEC have been noted in the water courses such as rivers and with more frequency at wastewater treatment plants [2,3]. The appearance of higher number of antibiotic-resistance bacteria in the water courses promotes an increase of the consumption of antibiotics [4]. SMX is a typical antibiotic widely used. On the other hand, as consequence of work's and life stress due to the economic and industrial growth turns anxiety and depression common diseases due to the frustration of unreachable goals [5]. Therefore, CBZ and LRZ are typical used as antiepileptic/anticonvulsant and anxiolytic drugs, respectively. The conventional wastewater treatment cannot face these biorecalcitrant compounds; therefore, alternatives should be considered. The AOPs have been explored to improve conventional wastewater treatments. An approach often used as AOP technologies is ozonation, since ozone is a powerful oxidant that can promote the degradation of recalcitrant compounds such as emerging contaminants. The application of this technology for the abatement of emerging contaminants has been widely studied [6]. Molecular ozone can react with high electronic density compounds due to the electrophilic character [7]. Martini et al. [8] and Martins et al. [9] achieved complete SMX removal by single ozonation process, which reveals ozone reactivity with this molecule. Within these advanced oxidation processes can be considered a wide range of technologies. Another source that can be explored is photocatalysis using the sunlight as radiation source, allowing using suitable catalysts the degradation of CECs with low cost energy. However, for this it is necessary to use a material that can be active with this radiation. Typically, the most applied catalyst in photocatalysis is titanium dioxide due to its low cost and chemical stability. Nonetheless, TiO₂ band gap (3.2 eV) just can be broken with UVA radiation. Nevertheless, this energetic band gap can be reduced so that visible light application is possible with the incorporation of noble (Ag, Pd, Pt and Au) or non (N, B, S) metals [10,11]. In fact, the noble metals due to the surface plasmon resonance can absorb the visible light [12]. Another aspect important on the noble metals application is related with the load used onto the TiO₂ structure [13,14]. The high amount of noble metal can mean a high cost for the catalyst production and, if in excess, noble metal particles can trap the active sites of TiO₂, working as scavenger [14,15]. Another problem of sunlight radiation application is related with the variation of the photon flux available during the year. In fact, the photon flux can present really impact on the emerging contaminants degradation [16].

Corbicula fluminea is an invasive bivalve which can promote a serious economic and ecological impact [17]. The high capacity of dispersion and resistance to adverse conditions turns this species problematic. Thus, it needs suitable management strategies [18,19]. Typically, these bivalves are chemically controlled. However, their high biofiltration capacity makes them possibly suitable for emerging contaminants removal from water [20]. Ferreira et al. [21] using a winery wastewater proved that 100% of COD removal was possible to achieve in 3 days of contact with *C. fluminea* after application of Fenton's process as a pre-treatment. Moreover, the *C. fluminea* proved to be suitable for the biofiltration of bacteria *Escherichia coli*, virus and other metals providing from water [20,22].

The aim of this work was to innovatively compare two different AOP's process (Ozonation and photocatalysis) and biofiltration with *C. fluminea* for the abatement of a mixture of SMX, CBZ and LRZ. In the photocatalysis experiments was also evaluated the effect of the presence of clouds and weather conditions on the photon flux, verifying its impact on the mixture degradation rate.

2. Materials and methods

2.1. Chemicals and catalysts

SMX, CBZ and LRZ were purchased at Sigma-Aldrich. The 1 wt% Ag and Pd doped TiO₂ catalysts were prepared by photodeposition method through UV–Vis light (1000 W Xe lamp) for 100 min, using AgNO₃ and PdCl₂ as respective precursors [14]. The main characterization is published elsewhere [14].

2.2. Experimental procedure: AOPs

The sunlight experiments were carried out in a 0.5 L cylindrical reactor with a CPC placed below, it covering all its surface. The load of photocatalyst placed in the reactor was 70 mg/L. This load was used based in previous works [23]. The reactor was covered with aluminum during 10 min before starting the experiment to avoid light penetration so that the adsorption of CECs on the photocatalysts could be attested. Samples were withdrawn at 0, 5, 10, 15, 30, 45 and 60 min. The solution recover in each time for analysis was filtrated by an acetate cellulose syringe filter with a pore size of 0.45 μm. The reaction homogeneity was guaranteed by the presence of axially placed porous stone which allows air bubbling. The photon flux and the spectrum of radiation was followed during the experiments through a radiometer (Oceans Optics USB 4000 fiber optic spectrometer). The sunlight experiments occurred at the roof of the Department of Chemical Engineering from the University of Coimbra (40.1865243°, –8.41797950°). These experiments were performed in two different seasons of the year, one in the middle of May and the other in the beginning of November of 2018.

The experiments with ozone occurred in a 2 L glass reactor. Ozone was obtained by a pure oxygen stream from an ozone generator (802N, BMT). The inlet and outlet ozone concentrations were measured by two gas ozone analyzers (BMT 963 vent and 964 vent, BMT). These analyses allow the calculation of the TOD needed to promote the drugs decontamination. In fact, with this powerful oxidant the limiting step it will be the ozone consumption which is very related with the time of reaction, as can be seen in Eq. (1).

$$\text{TOD} = \int_0^t \frac{Q_{\text{Gas}}}{V_{\text{Liquid}}} \times ([\text{O}_3]^{\text{in}} - [\text{O}_3]^{\text{out}}) \times dt \quad (1)$$

where Q_{Gas} represents the gas flowrate (0.2 L/min), V_{Liquid} is the volume of the effluent used in the reactor (2 L), $[\text{O}_3]^{\text{in}}$ and $[\text{O}_3]^{\text{out}}$ are the ozone concentrations incoming and leaving the reactor, respectively. TOD was expressed in mg O₃/L. The remaining ozone that leaves the reactor was destroyed by a solution of 2% (w/v) potassium iodide.

2.3. Experimental procedure: Biofiltration

Asian clams were collected from a well-established population at a canal in Mira, Portugal (N40°25′06.90″/W8°44′13.18″) [19]. The collection occurred at the beginning of 2019. The procedure for clam's acclimation and preparation for experiments can be seen [22]. The capacity to remove CECs from water was tested using glass biofilters of 0.5 L with 20 clams (clams dimension between 20–30 mm). The tests were performed in duplicate and the mixture without clams was also analyzed to attest if compounds self-decomposition occurred. The experiment was performed during 72 h and samples were taken at each 24 h.

2.4. Analytical procedure

The CECs used in the experiments were identified and quantified by high-performance liquid chromatography, equipped with a diode array detector (HPLC-DAD, UFLC, Shimadzu). The volume of injection of samples was 100 μL. The eluents at the ratio 60/40 monosodium phosphate in ultrapure water and acetonitrile were flowed throughout a Silia Chrom C-18 column with a flow rate of 1 mL/min under isocratic conditions. CECs quantification occurred at the wavelength of 255 nm.

3. Results and discussion

3.1. Photocatalysis: effect of season of the year

The use of sunlight as radiation source for photocatalysis has multiple advantages, such as the cost, the availability and the spectrum radiation which can present UVA and UVB radiation, that can promote the photolysis of a wide range of compounds. However, the weather can reduce the benefits of sunlight radiation due to the presence of clouds, smog and rain that can reduce photon flux. On this way, two situations were evaluated, one where sun was at its maximum of irradiation throughout all the reaction time and a second where the presence of clouds was noted at the middle of the reaction and which reduced the photon flux radiation.

The most difficult compound to degrade was CBZ (Fig. 1b) and it can be related with the tricyclic structure difficult to break through hydroxyl radicals. SMX (Fig. 1a) was easily removed for all the conditions tested.

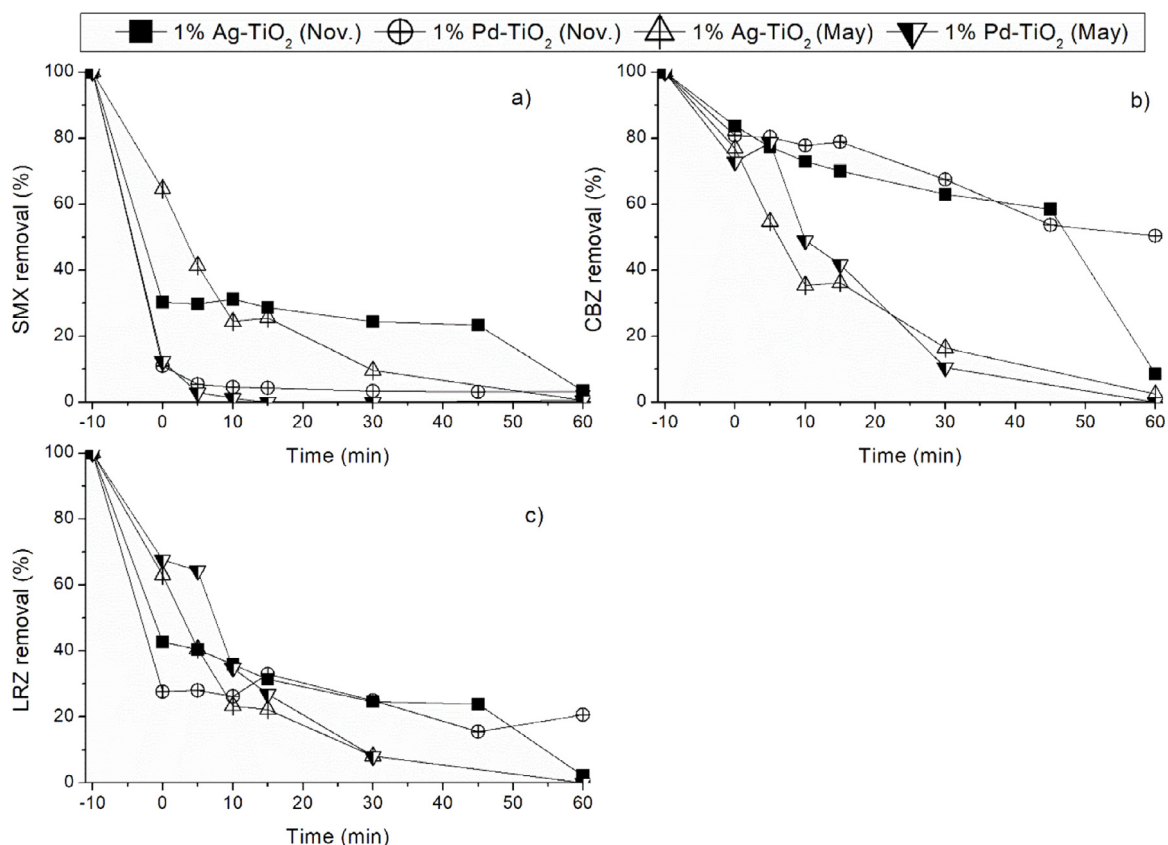


Fig. 1. Season of the year impact on photocatalytic oxidation for sunlight using Ag and Pd-TiO₂ on degradation of (a) SMX, (b) CBZ, (c) LRZ.

Until the 15 min of reaction for Pd-TiO₂ experiments in November, the photon flux radiation was almost 440 ± 10 W/m² similar with the obtained for the same catalyst in May during complete reaction time 430 ± 20 W/m². The main difference is related with the contribution of UVA and UVB spectrum since the intensity was smaller for these two in November. But looking to Fig. 1 the results indicate that until this time the degradation obtained for both conditions was similar. However, after that, due the appearance of clouds the photon flux reduced to 130 ± 40 W/m². This reduction promotes the lower degradation of CECs after this period. The same occurs with Ag-TiO₂ until 45 min, but at the last point the photon flux increases again to the maximum of radiation and the degradation achieved was almost complete for all the CECs tested.

3.2. Ozonation and biofiltration

The photocatalytic oxidation proves that this process can be efficient for the degradation of CECs. However, the weather can affect its performance. Therefore, alternatively ozone will be evaluated in this section for CECs degradation.

Ozone proven to be a good oxidant for the CECs considered degradation in this experiment (Fig. 2a). SMX and CBZ were quickly degraded. In just 5 min of reaction it was possible to remove all initial concentration (this time corresponds to a 2.4 mg/L of TOD). However, only 50% of LRZ was removed after 60 min. This lower efficiency can be related with the low electrophilicity of the LRZ molecule. Cl is an electron withdrawing group in the benzenic ring which may reduce the molecule reactivity with molecular ozone.

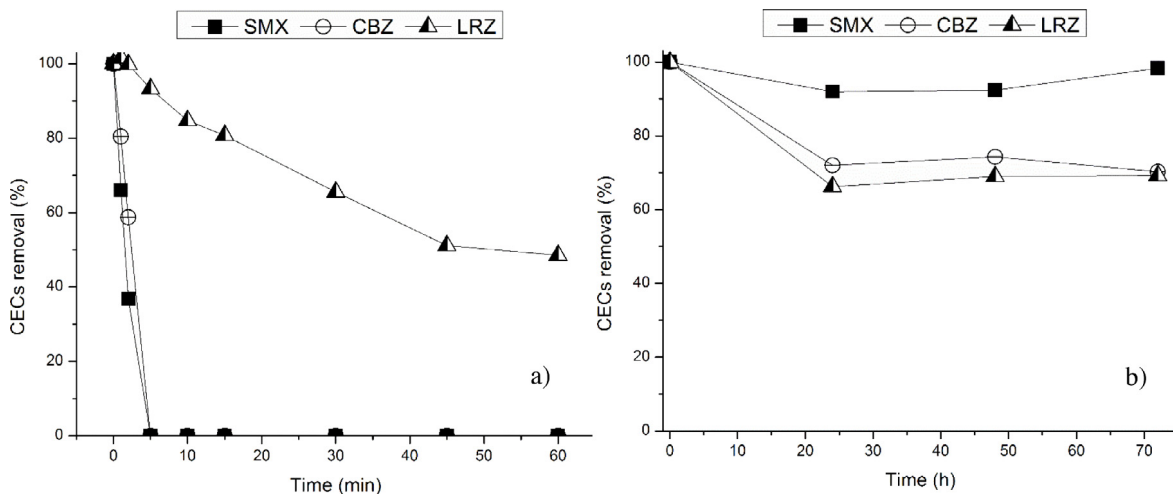


Fig. 2. CECs degradation by (a) single ozonation and (b) biofiltration by *C. fluminea*.

The Asian clams biofiltration process was tested as an alternative to AOPs. In fact, their resistance to adverse conditions and biofiltration capacity can be positive for CECs removal. On the other hand, the ecological and industrial impact of this invasive species turns their application for CECs removal as an environmental approach that can work as a pest management strategy [20]. The CECs removal was evaluated during 72 h of contact with 20 bivalves in 0.5 L of synthetic effluent. The concentration of CECs in the blank solution where the solution was only aerated did not suffer any abatement during this test period. The Asian clams can remove about 30% of CBZ and LRZ in 24 h (Fig. 2b). Until the 72 h, the pollutants concentration did not suffer further significant changes (Fig. 2b). This absence of alterations during this period can be related with the clam's saturation. Possibly with more clams it would be possible to achieve higher removals. Clams were not capable to remove SMX. Therefore, it seems that clams present a selective behavior regarding CECs removal. The mechanism of removal should be explored to verify if clams just work as adsorbent or can bioprocess these contaminants. After 144 h of contact, CECs concentration in water was again analyzed and no variation was verified (data not shown). Thus, even if probably saturated, the clams did not release the retained compounds.

4. Conclusions

The water courses have been constantly contaminated with contaminants of emerging concern, CEC, from pharmaceutical products usage. In fact, the increase on the consumption of such compounds promotes the pollution of water courses. Therefore, in this work were studied different approaches to promote the abatement of a mixture of three CECs. The ozonation proven to be a strong oxidant for SMX and CBZ. Otherwise, LRZ presents more resistance, possibly due to the low electrophilicity which promotes the reduction of the activity. Moreover, the photocatalysis shows that the weather conditions can promote significant impact in terms of degradation efficiency. The presence of clouds was analyzed and besides the photon flux reduction, also degradation of CECs was affected.

This is an important condition since the perfect sunlight radiation was not available all the year. Therefore, during the reactor project it must be needed in account this reduction on the efficiency. Alternatively, to AOPs methodologies was tested biofiltration through the *C. fluminea*. The clams in 24 h was able to remove about 30% of LRZ and CBZ. Moreover, during the 144 h the concentration of the both contaminants remains constant which reveals that the clams biofilter and does not release in the water.

Acknowledgments

Authors acknowledges to the European Fund for Regional Development (FEDER) within the framework COMPETE2020 by the financial support POCI-01-0247-FEDER-033193 (SERENA).

References

- [1] Bixio D, Thoeye C, Koning J, Joksimovic S, Savic D, Wintgens T, Melin T. Wastewater reuse in Europe. *Desal* 2006;187:89–101.
- [2] Petrovic M, Hernando M, Díaz-Cruz M, Barceló D. Liquid chromatography-tandem mass spectrometry for the analysis of pharmaceutical residues in environmental samples: a review. *J Chromat* 2005;1067:1–14.
- [3] Ahmed M, Zhou J, Ngo H, Guo W, Thomaidis N, Xu J. Progress in the biological and chemical treatment technologies for emerging contaminants removal from wastewater: A critical review. *J. Hazard Mat* 2017;323:274–98.
- [4] Chen J, Wei X, Liu Y, Ying G, Liu S, He L, Su H, Hu L, Chen F, Yang Y. Removal of antibiotics and antibiotic resistance genes from domestic sewage by constructed wetlands: Optimization of wetland substrates and hydraulic loading. *Sci Total Environ* 2016;565:240–8.
- [5] Melchior M, Caspi A, Milne BJ, Danese A, Poulton R, Moffitt TE. Work stress precipitates depression and anxiety in young, working women and men. *Psychol Med* 2007;37:1119–29.
- [6] Gomes J, Costa R, Quinta-Ferreira RM, Martins RC. Application of ozonation for pharmaceuticals and personal care products removal from water. *Sci Total Environ* 2017;586:265–83.
- [7] Martins RC, Quinta-Ferreira RM. Catalytic ozonation of phenolic acids over a Mn–Ce–O catalyst. *Appl Catal B: Environ* 2009;90:268–77.
- [8] Martini J, Orge CA, Faria JL, Pereira MFR, Soares OSG. Sulfamethoxazole degradation by combination of advanced oxidation processes. *J Environ Chem Eng* 2018;6:4054–60.
- [9] Martins RC, Dantas RF, Sans C, Esplugas S, Quinta-Ferreira RM. Ozone/H₂O₂ Performance on the degradation of sulfamethoxazole. *Ozone Sci Eng* 2015;37:509–17.
- [10] Pelaez M, Nolan NT, Pillai SC, Seery MK, Falaras P, Kontos AG, Dunlop PSM, Hamilton JWJ, Byrne JA, O’Shea K, Entezari MH, Dionysiou DD. A review on the visible light active titanium dioxide photocatalysts for environmental applications. *Appl Catal B: Environ* 2012;125:331–49.
- [11] Gomes J, Lincho J, Domingues E, Quinta-Ferreira RM, Martins RC. N–TiO₂ photocatalysts: A review of their characteristics and capacity for emerging contaminants removal. *Water* 2019;11(373).
- [12] Zheng ZK, Huang BB, Qin XY, Zhang XY, Dai Y, Whangbo MH. Facile in situ synthesis of visible-light plasmonic photocatalysts M@TiO₂ (M = Au, Pt, Ag) and evaluation of their photocatalytic oxidation of benzene to phenol. *J Mater Chem* 2011;21:9079–87.
- [13] Gomes J, Lopes A, Bednarczyk K, Gmurek M, Stelmachowski M, Zaleska-Medynska A, Quinta-Ferreira ME, Costa R, Quinta-Ferreira RM, Martins RC. Environmental preservation of emerging parabens contamination: effect of Ag and Pt loading over the catalytic efficiency of TiO₂ during photocatalytic ozonation. *Energy Procedia* 2017;136:270–6.
- [14] Gomes J, Lopes A, Bednarczyk K, Gmurek M, Stelmachowski M, Zaleska-Medynska A, Quinta-Ferreira ME, Costa R, Quinta-Ferreira RM, Martins RC. Effect of noble metals (Ag, Pd, Pt) loading over the efficiency of TiO₂ during photocatalytic ozonation on the toxicity of parabens. *ChemEngineering* 2018;2(4).
- [15] Mohamed MM, Khairou KS. Preparation and characterization of nano-silver/mesoporous titania photocatalysts for herbicide degradation. *Microprocess Mesop Mat* 2011;142:130–8.
- [16] Foszpańczyk M, Bednarczyk K, Drozdek E, Martins RC, Ledakowicz S, Gmurek M. Comparison of photocatalytic and photosensitized oxidation of paraben aqueous solutions under sunlight. *Water Air Soil Pollut* 2018;229(362).
- [17] Rosa IC, Pereira JL, Gomes J, Saraiva PM, Goncalves F, Costa R. The Asian clam *Corbicula fluminea* in the European freshwater-dependent industry: A latent threat or a friendly enemy?. *Ecol Econ* 2011;70:1805–13.
- [18] Gomes J, Pereira JL, Rosa IC, Saraiva PM, Gonçalves F, Costa R. Evaluation of candidate biocides to control the biofouling Asian clam in the drinking water treatment industry: An environmentally friendly approach. *J Great Lakes Res* 2014;40:421–8.
- [19] Rosa IC, Pereira JL, Gomes J, Pereira ML, Costa R, Gonçalves F. Dispersal of *Corbicula fluminea*: Factors influencing the invasive clam’s drifting behavior. *Ann Limnol Int J Limnol* 2014;50:37–47.
- [20] Gomes J, Matos A, Quinta-Ferreira RM, Martins RC. Environmentally applications of invasive bivalves for water and wastewater decontamination. *Sci Total Environ* 2018;630:1016–27.
- [21] Ferreira R, Gomes J, Martins RC, Costa R, Quinta-Ferreira RM. Winery wastewater treatment by integrating Fenton’s process with biofiltration by *Corbicula fluminea*. *J Chem Tech Biotech* 2018;93:333–9.
- [22] Gomes J, Lopes A, Gonçalves D, Luxo C, Gmurek M, Costa R, Quinta-Ferreira RM, Martins RC, Matos A. Biofiltration using *C. fluminea* for *E. coli* removal from water: Comparison with ozonation and photocatalytic oxidation. *Chemosphere* 2018;208:674–81.
- [23] Gomes J, Leal I, Bednarczyk K, Gmurek M, Stelmachowski M, Zaleska-Medynska A, Quinta-Ferreira ME, Costa R, Quinta-Ferreira RM, Martins RC. Detoxification of parabens using UV-A enhanced by noble metals—TiO₂ supported catalysts. *J Environ Chem Eng* 2017;5:3065–74.