

Arekar, Kirti; Ailawadi, Satish; Jain, Rinku

**Article**

## Reliability modelling for wear out failure period of a single unit system

Journal of Statistical and Econometric Methods

**Provided in Cooperation with:**

Scienpress Ltd, London

*Suggested Citation:* Arekar, Kirti; Ailawadi, Satish; Jain, Rinku (2012) : Reliability modelling for wear out failure period of a single unit system, Journal of Statistical and Econometric Methods, ISSN 2241-0376, International Scientific Press, Vol. 1, Iss. 1, pp. 33-41

This Version is available at:

<https://hdl.handle.net/10419/58013>

**Standard-Nutzungsbedingungen:**

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen (insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten, gelten abweichend von diesen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

**Terms of use:**

*Documents in EconStor may be saved and copied for your personal and scholarly purposes.*

*You are not to copy documents for public or commercial purposes, to exhibit the documents publicly, to make them publicly available on the internet, or to distribute or otherwise use the documents in public.*

*If the documents have been made available under an Open Content Licence (especially Creative Commons Licences), you may exercise further usage rights as specified in the indicated licence.*

# Reliability modelling for wear out failure period of a single unit system

Kirti Arekar<sup>1</sup>, Satish Ailawadi<sup>2</sup> and Rinku Jain<sup>3</sup>

## Abstract

The present paper deals with two time-shifted density models for wear out failure period of a single unit system. The study, considered the time-shifted Gamma and Normal distributions. Wear out failures occur as a result of deterioration processes or mechanical wear and its probability of occurrence increases with time. A failure rate as a function of time decreases in an early failure period and it increases in wear out period. Failure rates for time shifted distributions and expression for mean time to system are also obtained. Finally, the graphically representation of all the measures of reliability are shown. So we can say from the study that in the wear out period the reliability of the system increases and failure rates of the system decreases.

**Mathematics Subject Classification:** 90B25

**Keywords:** Wear out period, Single-unit system, Time-shifted, Rayleigh and Gamma density functions

---

<sup>1</sup> K.J. Somaiya Institute of Management Studies& Research Vidya Nagar, Vidya Vihar, Mumbai, India, e-mail: desh mukh\_k123@yahoo.com

<sup>2</sup> K.J. Somaiya Institute of Management Studies& Research Vidya Nagar, Vidya Vihar, Mumbai, India

<sup>3</sup> K.J. Somaiya Institute of Management Studies& Research Vidya Nagar, Vidya Vihar, Mumbai, India

## 1 Introduction

Reliability is an important consideration in planning, design and operation of systems. Reliability is a body of ideas, mathematical models and methods directed toward the solution of problems in predicting, estimating, or optimizing the probability of survival, mean life, or more generally, life distribution of components or systems. Other Problems considered in reliability theory are those involving the probability of proper functioning of the system at either a specified or arbitrary time, or the proportional of time the system functioning properly. There are different measures of reliability which help the system to repair and functioning properly.

Govil and Aggarwal proposed a time-shifted Rayleigh density for wear out failures. Bazovsky have evaluated the wear out failures rates for normal and lognormal distributions. Wear out failures occur as a result of deterioration processes or mechanical wear and its probability of occurrence increases with time. Failure rate for time shifted distributions and expressions for mean time to system failure are obtained. For different values of the parameters, the curves for average lifetimes are also drawn.

## 2 Models

### 2.1 Model I

Let us consider, the time shifted Gamma wear out failure density given by,

$$f_w(T) = \frac{e^{(-T+2T_w)}(T-T_w)^{\lambda-1}}{\Gamma(\lambda)}; \quad T \geq T_w, \quad \lambda > 0 \quad (1)$$

where  $\lambda$  is the parameter.

Let  $R_w(T)$  be the reliability function at time  $T$  in wear out periods  $(T, \infty)$ , then

$$R_w(T) = \int_T^{\infty} f_w(t) dt = \frac{1}{\Gamma(\lambda)} \left[ \int_0^{\infty} e^{-(t-T_w)}(t-T_w)^{\lambda-1} dt - \int_0^T e^{-(t-T_w)}(t-T_w)^{\lambda-1} dt \right]$$

$$R_w(T) = \frac{e^{T_w}(-T_w)^{\lambda-1}}{\Gamma(\lambda)} \left[ \frac{\Gamma(\lambda)}{(1)^\lambda} - \frac{(T_w)^{\lambda-1} e^{-T}}{T} - \int_0^T t^{\lambda-1} e^{-t} dt \right]; \quad T \geq T_w \quad (2)$$

Hence these two equations give failure density and reliability as a function of  $T$ .

The wear out failure rate  $\lambda_w(T)$  as a function of  $T$  is giving by,

$$\lambda_w(T) = \frac{f_w(T)}{R_w(T)} = \frac{\Gamma(\lambda)^2}{e^{(-T+2T_w)}(T-T_w)^{\lambda-1}} \times \frac{1}{A} \quad (3)$$

where

$$A = \frac{\Gamma(\lambda)}{(1)^\lambda} - \frac{(T_w)^{\lambda-1} e^{-T}}{T} - \int_0^T t^{\lambda-1} e^{-t} dt; \quad T \geq T_w$$

This predicts a linearly increasing failure rate of the component after its useful life period. If we make a prior assumption that a component has survived its useful life period. The mean time to failure (MTTF<sub>w</sub>) due to wear out period will be,

$$\text{MTTF}_w = \int_0^T T \cdot f_w(T) dT = \frac{(T_w)^{\lambda-1} e^{T_w}}{\Gamma(\lambda)} \left[ \int_0^\infty e^{-T} T^\lambda dT - \frac{\Gamma(\lambda+1)}{(1)^{\lambda+1}} \right] \quad (4)$$

Now, we determine the reliability for an operating time ( $t$ ) given  $T$ , i.e.  $R_w(T, t)$ ,

$$R_w(T, t) = \frac{\int_{T+t}^\infty f_w(T) dT}{\int_T^\infty f_w(T) dT}$$

where

$$\begin{aligned} \int_{T+t}^\infty f_w(T) dT &= \int_0^\infty \frac{(T-T_w)^{\lambda-1}}{\Gamma(\lambda)} e^{-(T-T_w)} dT - \int_0^{T+t} \frac{(T-T_w)^{\lambda-1}}{\Gamma(\lambda)} e^{-(T-T_w)} dT \\ \int_T^\infty f_w(T) dT &= \int_0^\infty \frac{(T-T_w)^{\lambda-1}}{\Gamma(\lambda)} e^{-(T-T_w)} dT - \int_0^T \frac{(T-T_w)^{\lambda-1}}{\Gamma(\lambda)} e^{-(T-T_w)} dT \\ R_w(T_w, t) &= \frac{[\Gamma(\lambda)/(1)^\lambda] - \int_0^{T+t} T^{\lambda-1} e^{-T} dT}{[\Gamma(\lambda)/(1)^\lambda] - \int_0^T T^{\lambda-1} e^{-T} dT} \quad (5) \end{aligned}$$

At the wear out failure period  $T_w$ ,

$$R_w(T_w, t) = \frac{\int_0^{T+t} (T_w)^{\lambda-1} e^{-T_w} dT_w - [\Gamma(\lambda)/(1)^\lambda]}{\int_0^T (T_w)^{\lambda-1} e^{-T_w} dT_w - [\Gamma(\lambda)/(1)^\lambda]}$$

The following Table illustrates the calculation of the reliability, failure rate and MTTF<sub>w</sub> from above equations. Here, we consider some arbitrary values of  $T_w$ ,  $T$ ,  $t$ , and  $\lambda$  and use Gauss – Laguarre method is used to evaluate the values  $R_w(T)$ ,  $\lambda_w(T)$ , MTTF<sub>w</sub> and  $R_w(T_w, t)$ .

## 2.2 Model II

Let us consider, the time shifted normal wear out failure density given by,

$$f_w(T) = \frac{1}{\sigma\sqrt{2\pi}} \exp\left[-\frac{(T-T_w-\mu)^2}{2\sigma^2}\right]; \quad \sigma > 0; \quad -\infty < \mu < +\infty; \quad T \geq T_w \quad (6)$$

Where  $\mu, \sigma$  are the parameters.

Let  $R_w(T)$  be the reliability function at time  $T$  in wear out period  $(T, \infty)$ , then

$$\begin{aligned} R_w(T) &= \int_T^{\infty} f_w(t) dt = \int_T^{\infty} \frac{1}{\sigma\sqrt{2\pi}} \exp\left[-\frac{(t-T_w-\mu)^2}{2\sigma^2}\right] dt \\ &= \frac{\sigma}{(t-T_w-\mu)} \exp\left[-\frac{(T-T_w-\mu)^2}{2\sigma^2}\right] \end{aligned} \quad (7)$$

when  $T \geq T_w$ .

Hence from these two equations we have the failure density and reliability as a function of  $T$ . The wear out failure rate  $\lambda_w(T)$  as a function of  $T$  is given by,

$$\lambda_w(T) = \frac{f_w(T)}{R_w(T)} = \frac{T-T_w-\mu}{\sigma^2\sqrt{2\pi}} \quad (8)$$

This predicts a linearly fluctuations failure rates of the component after its useful life period. If we make a prior assumption that a component has survived its useful life period, the mean time to failure (MTTF<sub>w</sub>) due to wear out period will be,

$$\text{MTTF}_w = \int_0^{\infty} T \cdot f_w(T) dT = \frac{T\sigma}{\sqrt{2\pi}(T-T_w-\mu)} \exp\left[\frac{T_w+\mu}{2\sigma^2}\right] \quad (9)$$

Now we can determine the reliability for an operating time ( $t$ ) given  $T$ , i.e.  $R_w(T, t)$ ,

$$R_w(T, t) = \frac{\int_{T+t}^{\infty} f_w(T) dT}{\int_T^{\infty} f_w(T) dT}$$

where

$$\int_{T+t}^{\infty} f_w(T) dT = \frac{\sigma}{\sqrt{2\pi}(T-T_w-\mu)} \exp\left[-\frac{(T-T_w+t-\mu)^2}{2\sigma^2}\right]$$

$$\int_T^{\infty} f_w(T) dT = \frac{\sigma}{\sqrt{2\pi}(T-T_w-\mu)} \exp\left[-\frac{(T-T_w-\mu)^2}{2\sigma^2}\right]$$

$$R_w(T, t) = \exp\left[\frac{t}{2\sigma^2}(t+2T_w-2T+2\mu)\right]$$

At the wear out failure period  $T_w$ ,

$$R_w(T, t) = \exp\left[\frac{t}{2\sigma^2}(t+2\mu)\right] \quad (10)$$

### 3 Main Results

#### 3.1 For Model I

Table 1: Reliability, Failure rates and Mean time to failure (MTTF<sub>w</sub>) at the wear out period

$T = t = 10000$ hrs; $\lambda = 10$					
$T_w$ (wear out periods)	2000	3000	5000	10000	14000
$R_w(T)$ (Reliability in wear out periods)	0.8168	0.5431	0.4321	0.1216	0.1133
$\lambda_w(T)$ (failure rates)	1.3162	4.0218	6.3167	7.0026	9.3123
$R_w(T_w, t)$	0.7116	0.5444	0.3226	0.2161	0.1243
MTTF <sub>w</sub>	2131.2	2932.6	4561.6	9428.8	12363.2

#### 3.2 For Model II

The following table illustrates the calculation of the reliability, failure rate and MTTF<sub>w</sub>. Here, we considered some arbitrary assumed values of  $T_w$ ,  $T$ ,  $t$ ,  $\mu$  and  $\sigma$ . Values of  $R_w(T)$ ,  $\lambda_w(T)$ , (MTTF<sub>w</sub>) and  $R_w(T_w, t)$  are evaluated from the above equations.

Table 2: Reliability, Failure rates and Mean time to failure (MTTF<sub>w</sub>) and  $R_w(T_w, t)$  at the wear out period

For Normal Distribution				
$T_w \downarrow$	$\mu = 5.0$ ; $T = 4.0$ days; $t = 2.0$ ; $\sigma = 5.0$			
	$R_w(T)$	$\lambda_w(T)$	MTTF <sub>w</sub>	$R_w(T_w, t)$
0.5	0.7187	4.5016	0.4621	0.8697
1.0	0.6316	3.2316	0.9312	0.8022
1.5	0.5444	2.3134	1.1216	0.7124
2.0	0.4321	2.0133	1.8326	0.7012
2.5	0.4116	1.1666	2.1200	0.6148
3.0	0.3200	1.0016	2.8217	0.4325
3.5	0.2162	1.3421	3.2112	0.3216
4.0	0.1189	1.2622	3.9316	0.2803
4.5	0.1011	1.0821	3.1216	0.2015

## 4 Graphical Representations

### 4.1 For Model I

Curves plotted between the different values of  $T_w$  and  $R_w(T)$ ,  $\lambda_w(T)$ ,  $(MTTF_w)$  and  $R_w(T_w, t)$ , as given below,

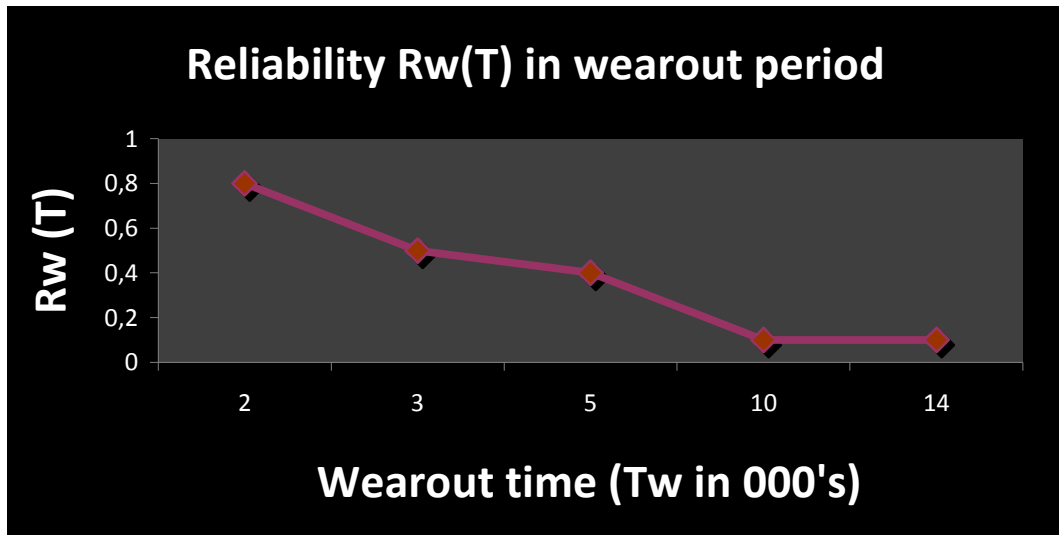


Figure 1: Reliability in wear out period

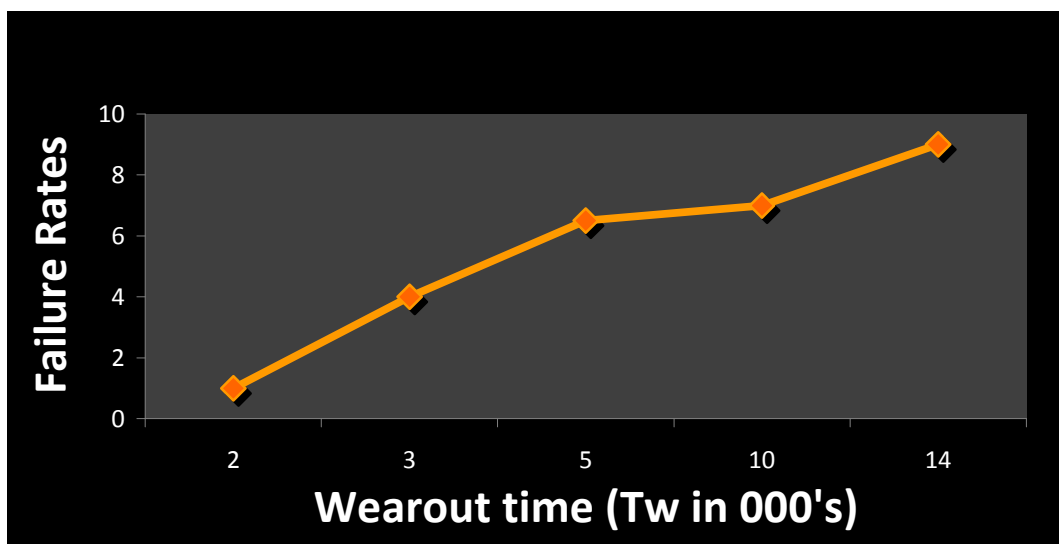


Figure 2: Failure rates in wear out period

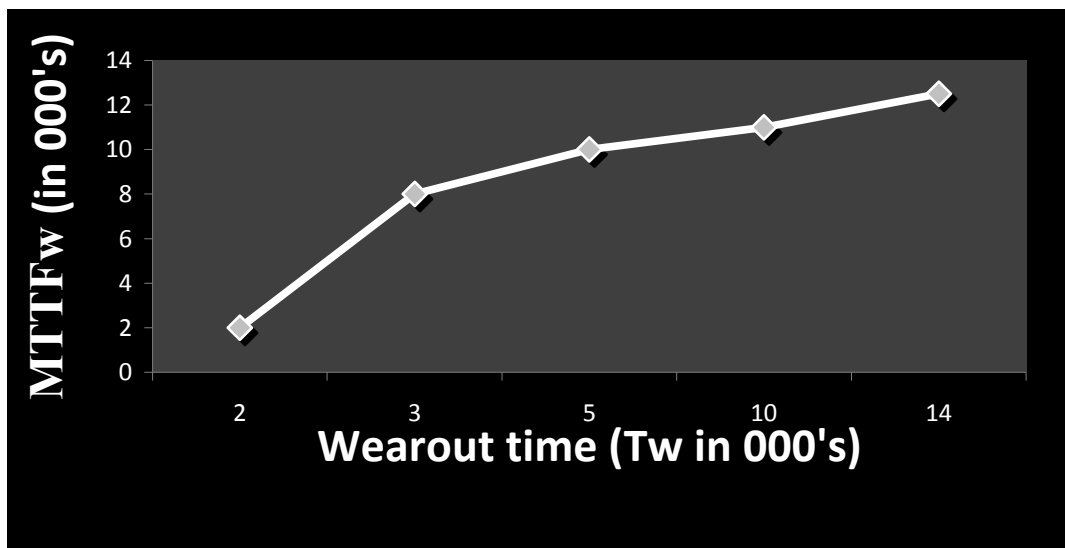


Figure 3: Mean time to failure in wear out period

#### 4.2 For Model II

Curves plotted between the different values of wear out periods and the failure rates in the wear out periods.

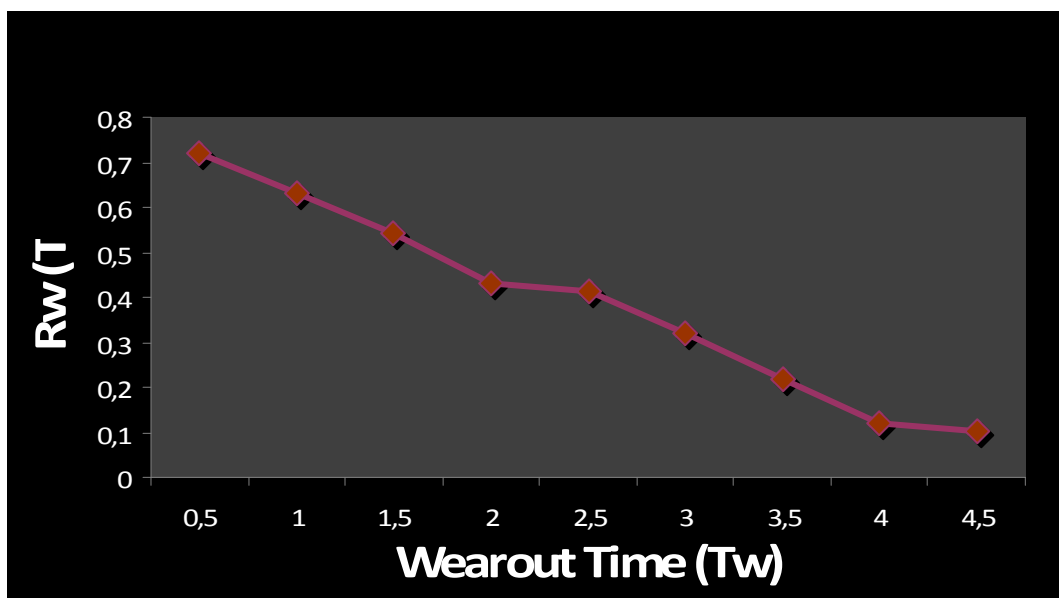


Figure 4: Reliability in wear out period



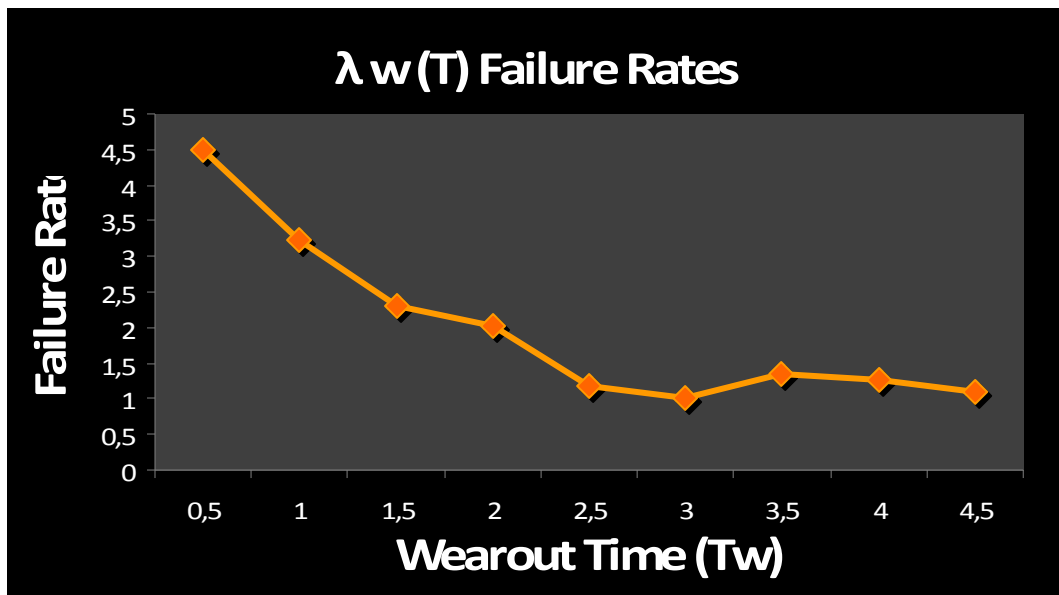


Figure 5: Failure rates in wear out period

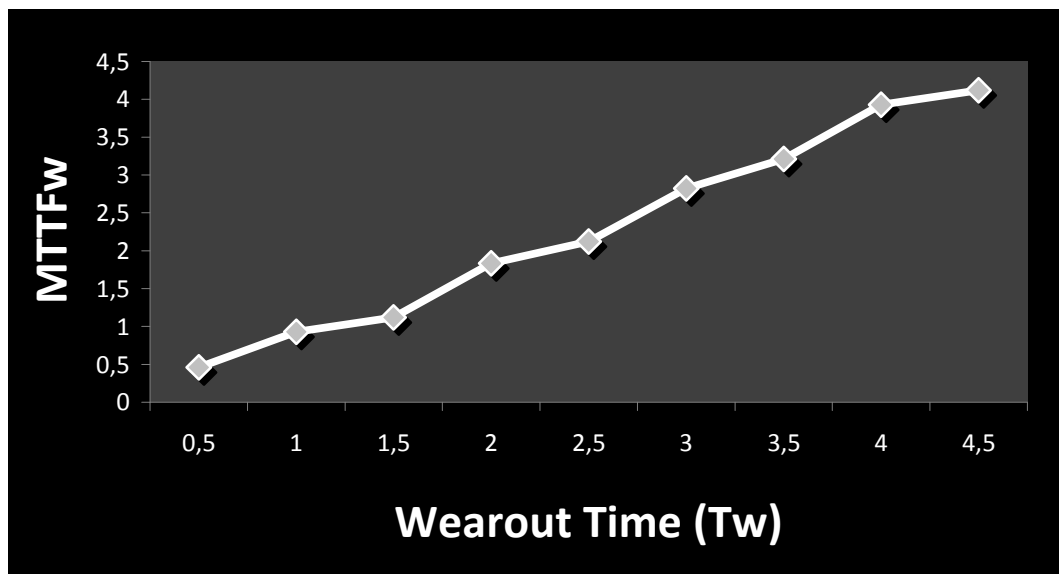


Figure 6: Mean time to failure in wear out period

## 5 Conclusions

For **Model I**: From the figures, we perceive that,

- 1) We get the maximum reliability 0.8168 at wear out period 2000 hrs and minimum reliability 0.1133 at wear out period 14000hrs. As the wear out period increase reliability in the wear out period also decreases.
- 2) We get the maximum failure rate 9.3123 at wear out period 14000 hrs and minimum failure rate 1.3126 at wear out period 2000 hrs. As the wear out time an increase failure rates also decreases.
- 3) We get the maximum mean time to failure 0.7116 at wear out period 2000 hrs and minimum mean time to failure 0.1243 at wear out period 14000 hrs. As the wear out time increases the mean time to failure decreases.

For **Model II** : From the above charts, it is perceived that as the wear out period increases the reliability in wear out period and failure rates decreases, mean time to failure in the wear out period increases and the reliability between wear out period and operating period decreases.

## References

- [1] K. Verma and V. Vijay Venu, Adequacy-based power system reliability studies in the deregulated environment, *Intl. Journal of Reliability, Quality and Safety Engineering*, **15**(2), (April, 2008), 129-141.
- [2] I. Bazovsky, *Reliability Theory and Practice*, Prentice Hill, Englewood Cliffs, New Jersey, 1961.
- [3] K.K. Govil and K.K. Aggrawal, Time – Shifted Rayleigh density for wear out failures, *Microelectronics and Reliability*, **22**, (1982), 707-708.
- [4] M.C. Gupta and A. Kumar, On Profit considerations of a maintained system with repairs, *Microelectronics and Reliability*, **23**(3), (1983), 437-439.
- [5] A.K. Verma and V. Vijay Venu, Revised well-being analysis applied to reserve adequacy studies in vertically integrated power utilities, *Intl. Journal of Communications in Dependability and Quality Management*, **12**(1), (March, 2009), 101-110.
- [6] P. Chen, Z. Chen and B. Bak-Jensen, Probabilistic load flow: a review, *3rd International Conference on Electricity Utility Deregulation and Restructuring and Power Technologies* (DRPT, Nanjing, China, (April, 2008), 1586.