

Ghane, Mahdi; Tarokh, Mohammad

Article

Multi-objective design of fuzzy logic controller in supply chain

Journal of Industrial Engineering International

Provided in Cooperation with:

Islamic Azad University (IAU), Tehran

Suggested Citation: Ghane, Mahdi; Tarokh, Mohammad (2012) : Multi-objective design of fuzzy logic controller in supply chain, Journal of Industrial Engineering International, ISSN 2251-712X, Springer, Heidelberg, Vol. 8, pp. 1-8,
<https://doi.org/10.1186/2251-712X-8-10>

This Version is available at:

<https://hdl.handle.net/10419/78569>

Standard-Nutzungsbedingungen:

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen (insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten, gelten abweichend von diesen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

Terms of use:

Documents in EconStor may be saved and copied for your personal and scholarly purposes.

You are not to copy documents for public or commercial purposes, to exhibit the documents publicly, to make them publicly available on the internet, or to distribute or otherwise use the documents in public.

If the documents have been made available under an Open Content Licence (especially Creative Commons Licences), you may exercise further usage rights as specified in the indicated licence.



<http://creativecommons.org/licenses/by/2.0/>

ORIGINAL RESEARCH

Open Access

Multi-objective design of fuzzy logic controller in supply chain

Mahdi Ghane¹ and Mohammad Jafar Tarokh^{2*}

Abstract

Unlike commonly used methods, in this paper, we have introduced a new approach for designing fuzzy controllers. In this approach, we have simultaneously optimized both objective functions of a supply chain over a two-dimensional space. Then, we have obtained a spectrum of optimized points, each of which represents a set of optimal parameters which can be chosen by the manager according to the importance of objective functions. Our used supply chain model is a member of inventory and order-based production control system family, a generalization of the periodic review which is termed 'Order-Up-To policy.' An auto rule maker, based on non-dominated sorting genetic algorithm-II, has been applied to the experimental initial fuzzy rules. According to performance measurement, our results indicate the efficiency of the proposed approach.

Keywords: Supply chain, Fuzzy logic controller, Multi-objective optimization

Background

A supply chain is a system of organizations, people, technology, activities, information, and resources involved in performing the functions of procurement of raw materials, transformation of raw materials into intermediate and finished product that is delivered to the end customer. Recently, enterprises have exposed a growing interest in efficient supply chain management. This is due to the rising cost of manufacturing and transportation, the globalization of market economies, and the customer demand for diverse products of short life cycles. A properly designed supply chain system is essential for competitive performance. Control theory advocates a wide range of attributes and standard measures for proper design (Towill 1982). There are different methods to evaluate the performance of a supply chain especially in different case studies. Wang et al. (2007) evaluated the performance of a supply chain for mass customization.

Fundamentally, there are two common objective functions in supply chain systems (Wang et al. 2007): (1) inventory-level recovery and (2) attenuation of demand rate fluctuations on the ordering rate. Proper inventory-level recovery results in lower inventory costs and better

customer services, although in order to optimize the system performance, the designer has to select fixed or variable stock values (agile production systems; Towill and McCullen 1999). The second objective function aims at the reduction of the 'bullwhip' effect. According to Lee et al. (1997), a small variation in the demands of the downstream end-customer may cause remarkable variation in the upstream supplier's side which is known as the bullwhip effect. The term bullwhip is not a new concept (Forrester 1961; Burbidge 1991; Figure 1).

Many researchers have worked on the bullwhip effect and its attenuation. Christer and Robert (2002) studied the complexities of bullwhip by using fuzzy numbers in the bullwhip models. Peter and Dennis (2002) verified how proven material flow control principles considerably reduce the bullwhip in a supply chain. Some researchers are dedicated to forecasting policy. The bullwhip problem is studied by exponential smoothing algorithms in both 'stand-alone' passing-on-orders mode and within inventory-controlled feedback systems in Dejonckheere et al. (2003). Also, Xiaolong (2004) derived and measured a forecasting procedure that minimizes the mean squared forecasting error for the specified demand process. Disney and Towill (2003) proposed a good analytical expression in the inventory position and pipeline position to quantify the bullwhip effect. Jiu-Biing (2005)

* Correspondence: mjtarkh@kntu.ac.ir

²Industrial Engineering Department, K.N.Toosi University of Technology, Tehran 19697 64499, Iran

Full list of author information is available at the end of the article

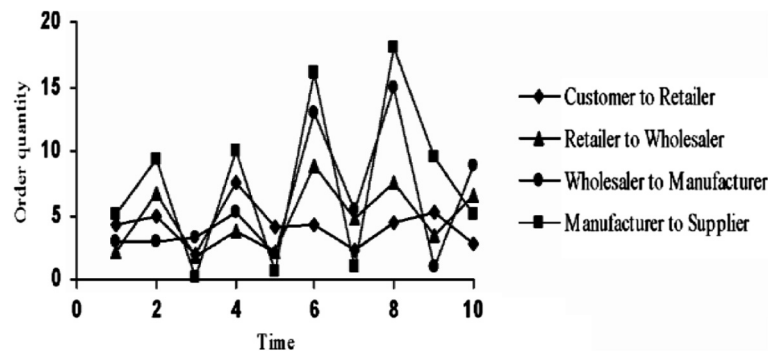


Figure 1 Increasing variability of orders up the supply chain. Adapted from Yu and Zhang (2010).

presented a multi-layer demand-responsive logistics control strategy for alleviating the bullwhip effect.

In the case of inventory-level recovery, the work of Disney and Towill (2003) can be mentioned which uses control theory method to evaluate this objective function in the general supply chain to cover the dynamic behavior of the chain. However, for a simplified system, we can make an analytical measure. Disney and Towill (2003) tried to show how T_i , T_a , and T_w change as the balance between inventory-carrying costs (first objective) and production on-costs (second objective) alters. The sum of objectives in a simplified supply chain model is defined in Equation 1. Their solution only returns a single set of parameters and cannot be extended to a general model; in addition, it is not able to add more constraints to the model. Moreover, it does not cover the dynamic effect of different demand signals.

$$\text{Score} = (K \times VR_{\text{ORATE}}) + VR_{\text{AINV}} \quad (1)$$

Achieving a well-designed supply chain (SC) is very difficult since various sources of uncertainty and complex interactions among various entities (suppliers, manufacturers, distributors, retailers) exist in the SC. Structured uncertainty and unstructured uncertainty are the two major uncertainties in each model. One of the best solutions to deal with uncertainty is fuzzy logic. In Wang and Shu (2005), fuzzy set theory was used to minimize SC holding cost.

A good attempt to optimize and design a supply chain using a multi-objective viewpoint is presented by Mahnadm et al. (2009). In their work, fuzzy logic is used to handle the uncertainty of different suppliers. Banerjee and Roy (2009) considered the application of the intuitionistic fuzzy optimization in the constrained multi-objective stochastic inventory model. Larbani (2009) surveyed most of the approaches for solving non-cooperative fuzzy games in normal form. In addition, applications of these games were also discussed. Yu and Zhang (2010) proposed a generalized form of fuzzy game and extended as a cooperative fuzzy game. They also

provided a practical application for production problem. Chen et al. (2010) formulated a game framework for the strategic behavior of supply chain partners based on fuzzy multi-objective programming, but fuzzy rules mostly were fixed and defined by expert knowledge. Due to the lack of an intelligent mechanism to derive fuzzy rules, fuzzy membership functions based on different weights between objective functions were clear in these attempts.

In this study, a multi-objective approach is used to optimize fuzzy controllers and forecasting policy simultaneously. Structured uncertainty is one of the main challenges in a well-designed supply chain. In this regard, we use a fuzzy logic controller in inventory policy and work in process policy.

The paper is organized as follows: simulation results are presented in the 'Results and discussion' section; concluding remarks and suggestions for future research directions, in the 'Conclusions' section. This paper ends with the 'Methods' section which offers a review on basic theory of the suggested method.

IOBPCS model description

The first attempts for modeling and controlling decentralized systems were done by Forrester (1961). The objective of this work was to perform a dynamic analysis, simulation of industrial systems using discrete dynamic mass balances, and linear and non-linear delays in the distribution channels and manufacturing sites. Various alternative methods have been proposed for modeling supply chains which are classified into four groups (Beamon 1998; Balan et al. 2007).

A simple decentralized supply chain is shown in Figure 2.

For modeling each echelon of this supply chain, a powerful generic order-based production control system (IOBPCS) model was presented by Towill (1982) in a block diagram form (Figure 3).

The IOBPCS family has been considered in both continuous and discrete time using the Laplace and z-transform (Chen et al. 2010; Deb 2001). Via specific parameter settings, a range of well-known replenishment algorithms



a multiple of current average sale rates. Standard nomenclature used in industrial dynamics is adopted to stand for input, output, and intermediate signals in the block diagram (Haralambos et al. 2008):

- AINV: actual inventory holding
- AVCON: average consumption
- AWIP: actual WIP holding
- COMRATE: completion rate
- CONS: consumption or market demand
- DINV: desired inventory level
- DWIP: desired WIP
- EINV: error in inventory holding
- EWIP: error in WIP
- ORATE: order rate

Recently, researchers have studied different properties of the so-called inventory order-based production control system (IOBPCS) model. As a case in point, the stability of the discrete-time IOBPCS model has been investigated by Disney and Towill (2003, 2005): they presented a general methodology to derive the critical stability boundary using a transfer function.

We used a fuzzy logic controller (FLC) in inventory policy and work in process policy. The FLC has two inputs (premises): error, $e(t)$, and error derivative, $de(t)$, and



one output (consequent): control action, $u(t)$. Each of these three controller variables is evaluated over a normalized space range of $[-1,1]$, using five membership functions (NB, NS, Z, PS, PB). The Mamdani interference method and the AND connective are utilized with equal rule weighting. Then, a rule base consisting of 25 rules is produced.

One approach could be to optimize the rule base using all possible combinations of premise/consequent possibilities. We, therefore, have to test 450 different rules to achieve the best set of rules, which is time-consuming. Another alternative method is to diminish the rules. In this respect, there are different rule decreasing methods (Foran 2002). Before applying the method described in Foran (2002), some assumptions should be considered which are essentially based on experience.

The magnitude of the output control action is consistent with the magnitude of the input value; in other words, an extreme input value (premise) results in an extreme output value (consequent), a mid-range input value causes a mid-range output value, and a small/zero input value is synonymous with a small/zero output value.

If a large negative (positive) input generates a large negative (positive) response, then it is likely that smaller negative (positive) inputs will demand a response with the same polarity, but it would be with a smaller magnitude, and so on until a zero-crossing point is reached at the point whose response polarity changes.

The above-mentioned approach is a variation of the method used in Ross (1995). The consequent rule space is then 'overlaid' upon the premise coordinate system and is partitioned into regions where each region represents a consequent fuzzy set. The rule base is then extracted by determining the consequent region in which each premise combination point lies. Different possible consequent space partitions are defined using two parameters: consequent-line angle, θ , and consequent-region spacing, C_s .

The consequent-line angle defines the slope of the consequent line, which is used to create the space partitions. C_s is a proportion of the fixed distance between premises on the coordinate system and is used to define the distance between consequent points along the consequent line defined by angle θ .

This method is illustrated in Figure 4, considering $\theta = 50^\circ$ and $C_s = 1$ with fixed premise spacing which is equal to consequent spacing. It should be noted that this may not be a real rule base in our study and it is just used to show the method.

Results and discussion

Structure description

In this part, we are going to present the results of our simulation to reflect the efficiency and the flexibility of our proposed method in finding optimal fuzzy controller

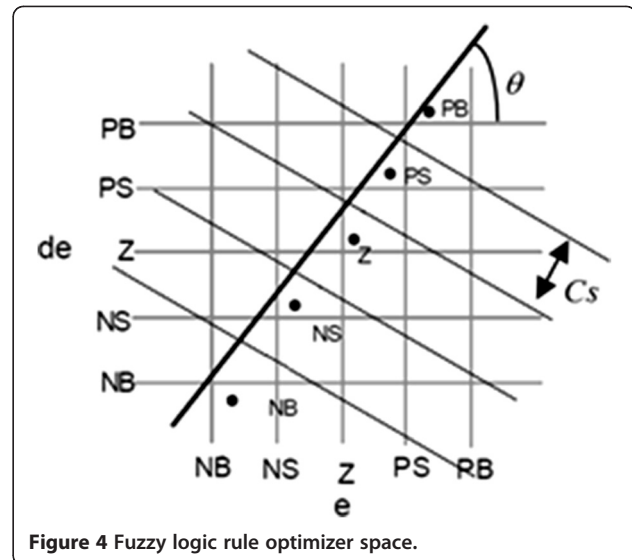


Figure 4 Fuzzy logic rule optimizer space.

parameters. We will use a discrete model of the most general member of the IOBPCS family, the automatic pipeline inventory and the order-based production control system (APVIOBPCS).

Figure 5 illustrates a block diagram of our proposed structure. Inputs of the multi-objective optimizer block are system objective functions. Notwithstanding the fact that this is a general structure, in our study, objective functions are inventory recovery response and attenuating bullwhip. According to these objective functions, and using the non-dominated sorting genetic algorithm-II (NSGA-II) method as an algorithm for multi-objective optimization, two sets of optimal parameters are produced. The first set directly affects the system dynamics, and the other set is used as the fuzzy tuning block input to optimize rule base and scaling gains. Outputs of multi-objective optimizer block and boundaries are shown in Table 1.

For evaluating objective functions, bullwhip is quantified as the ratio of output variance (ORATE) to the variance of input (Demand) while white noise represents

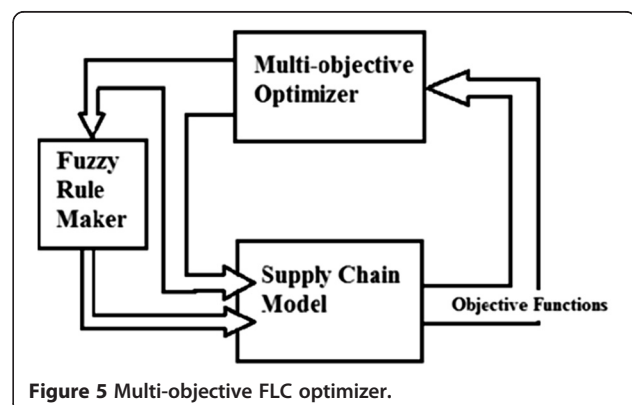


Figure 5 Multi-objective FLC optimizer.

Table 1 Fuzzy controller parameters and boundaries

		Parameters	Boundaries	Sample
Inventory policy	FLC	θ_{inv}	[5,170]	79.53
		Cs_{inv}	[0.5,2]	1.346
	Scaling gain	$G1_e$	[0.5,3]	0.9282
		$G1_{de}$	[0.5,3]	0.7175
		$G1_{out}$	[-2,2]	1.0013
Work in process policy	FLC	θ_{wip}	[5,170]	17.496
		Cs_{wip}	[0.5,2]	0.9529
	Scaling gain	$G2_e$	[0.5,3]	1.1328
		$G2_{de}$	[0.5,3]	0.7797
		$G2_{out}$	[-2,2]	0.9529
Forecasting		Ta	[1,10]	2.578

random demand in the market place, and the metric for quantifying inventory recovery responsiveness is the integral of time multiplied by absolute error (ITAE) which is defined by Equation 2 (Disney and Towill 2003):

$$ITAE_{AINV} = \sum_{n=0}^{\infty} n|E|. \quad (2)$$

This error is the difference between desired inventory and actual inventory. Also, the desired inventory level may be fixed or be a multiple of average order.

Results and comparisons

As we mentioned, NSGA-II is used inside the multi-objective optimizer block. In this study, we fix the population of NSGA-II to 165 individuals. The optimal Pareto front, obtained through the multi-objective optimization of the parameters, is presented in Figure 6.

Figure 6 compares the fuzzy controller with the p-action controller. In some area, the fuzzy controller acts

better than the p-action controller, and in some area, it does not. The major feature of fuzzy controllers is their ability in dealing with uncertainty, which is discussed in the subsequent part; nevertheless, in this study, we decrease the number of rules and use only 165 individuals in our simulation. Probably, it could be more optimal if a different setting is used for multi-objective block.

Uncertainty analysis

P-action controller is compared with fuzzy controller in the case of structured uncertainty. These may happen in inventory policy or forecasting policy. Exponential smoothing forecasting is used with the parameter Ta , which is shown in Figure 3. Lead time (Tp) is the parameter of forecasting policy which plays a crucial role because it defines the order of the system. A sample is selected from the Pareto front. Optimized parameters and their boundaries are shown in Table 1 for fuzzy controller, and p-action controller parameters are shown in Table 2.

Rule bases which resulted from our method for inventory loop and work in process loop are presented in Figures 7 and 8, respectively.

The order quantity of the system is presented for these controllers in normal situation in Figure 9. Normal parameters are shown in Tables 1 and 2. Now, we assume that there is some structured uncertainty in both forecasting mechanism and lead time. Hence, we assume $Tp = 1.5$ and $Ta = 3$ instead of $Tp = 1$ and $Ta = 1.7213$. The response is shown in Figure 10.

Although Ta is an important parameter in forecasting mechanism, uncertainty in Tp as lead time is more important because it defines the order of the system. It is clear that fuzzy controller acts much better than p-action controller.

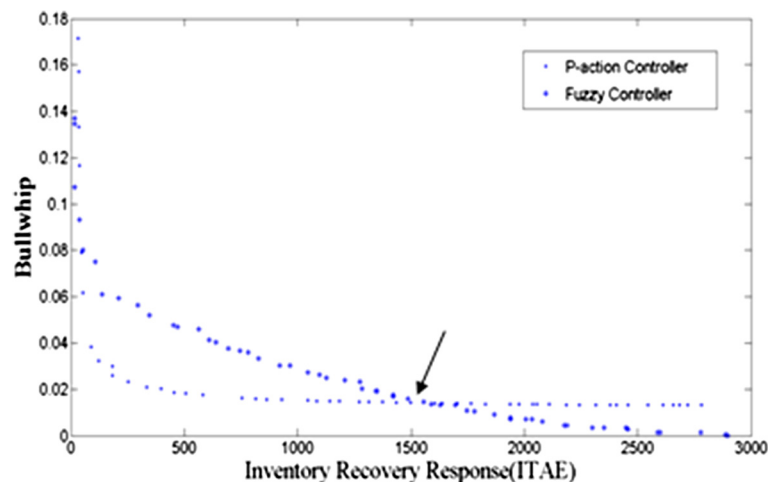


Figure 6 Pareto optimal front. The arrow refers to a set of parameters which are presented in the subsequent part.

Table 2 P-action controller parameters and boundaries

	Parameters	Sample
P-action	Ti	7.9353
	Ta	1.7213
	Tw	2.2507

Conclusions

In supply chain, control parameter settings for different policies and different cases are very important. It is more critical when we face uncertainty. In this study, based on a fuzzy controller, the bi-objective supply chain model has been analyzed. In this manner, a rule base-maker algorithm has been used to make new fuzzy rule bases to achieve the optimum rule base. Using a multi-objective manner based on NSGA-II, the optimum parameters for rule maker's input and scaling and forecasting gains have been obtained, and then they have been used for an optimum design of fuzzy controller. In case of the presence of uncertainty, both p-action and fuzzy controllers have been compared, and the obtained results indicate excellent robustness in designed fuzzy controller compared to p-action controller. This robustness becomes more important when we face uncertain lead time because it changes system dynamic (the order of the system). This new bi-objective approach for supply chain design has been proposed which, in the case of uncertainty, is more robust than formerly used p-action controllers.

The results also show that combination of fuzzy logic and other soft computing methods is a good candidate for future development work because of its non-linear approximation capability and adaptability. Further perspective and attractive challenges for future research are the modification of different membership functions and the establishment of a non-linear-based modeling approach for real supply chain, e.g., the improvement of forecasting mechanism due to its fundamental effect on bullwhip.

Methods

NSGA-II implementation for multi-objective optimization

Multi-objective optimization (MOO) methods are utilized when two or more objective functions are

de/e	NB	NS	Z	PS	PB
NB	NB	NB	NS	NS	Z
NS	NS	NS	NS	Z	Z
Z	NS	Z	Z	Z	PS
PS	Z	Z	PB	PS	PS
PB	Z	PS	PB	PB	PB

Figure 7 Rule base for inventory loop.

de/e	NB	NS	Z	PS	PB
NB	NB	NB	NS	Z	PS
NS	NB	NS	Z	PS	PB
Z	NB	NS	Z	PS	PB
PS	NB	NS	Z	PS	PB
PB	NS	Z	PS	PB	PB

Figure 8 Rule base for work in process loop.

necessary to be optimized simultaneously (Deb 2001). In the case of MOO methods, relative importance of objective functions is not generally known until the system's best capabilities are determined and trade-off between the objective functions is fully understood. This feature is the main advantage of MOO methods in comparison with simply weighted cost functions. The definition of an MOO problem requires substantial acquaintance with some preliminary definitions which are described as follows:

Objective functions: some functions of decision variables and criteria for estimating the appropriateness of a response. There are numbers of $k \geq 2$ objective functions in MOO which are shown as the vector $f(\bar{x}) = [f_1(\bar{x}), \dots, f_k(\bar{x})]$.

Decision variables: a set of variables whose values suggest the response the response and can be right or wrong. These variables are presented in a form of $\bar{x} = [x_1, x_2, \dots, x_r]^T$ where r is the number of variables.

- Constraints: defined in a form of some functions of decision variables, such as equalities or inequalities:

$$\text{Equality : } g_i(\bar{x}) = 0; i = 1, \dots, p, \quad (3)$$

$$\text{Inequality : } h_i(\bar{x}) \leq 0; i = 1, \dots, m. \quad (4)$$

- Feasible region: it is defined as the set of whole decision variables satisfying all constraints.
- Dominancy: NSGA-II is used in non-dominated sorting for fitness assignments. All individuals not dominated by any other individuals are assigned front number 1. All individuals only dominated by individuals in front number 1 are assigned front number 2, and so on. Selection is made using tournament between two individuals. The individual with the lowest front number is selected if the two individuals are from different fronts. The individual with the highest crowding distance is selected if they are from the same front.

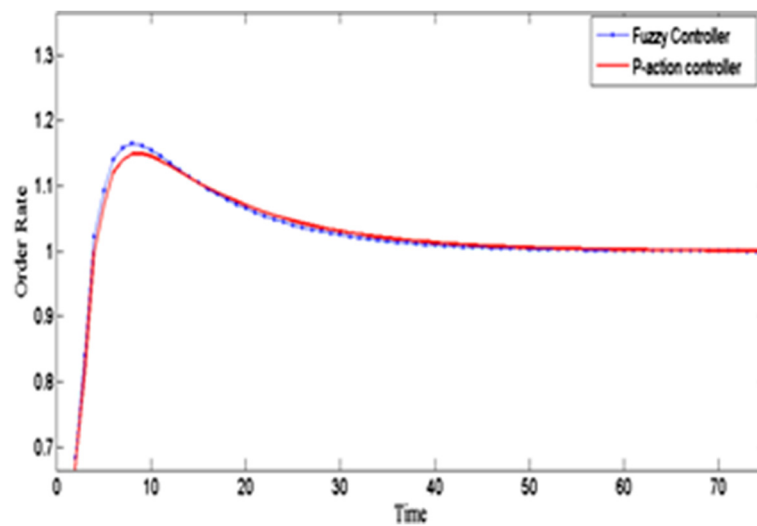


Figure 9 Order rate placed on a supplier.

In other words, the decision vector $\bar{x}_2 \in F$ is dominated by the decision vector $\bar{x}_1 \in F$, if and only if the decision vector $\bar{x}_1$ is better than or equal to $\bar{x}_2$ in all objectives:

$$\bar{x}_1 \succ \bar{x}_2 \leftrightarrow f(\bar{x}_1) \leq f(\bar{x}_2). \quad (5)$$

Pareto: when the cost functions have no conflict with each other, in MOO problems, it is possible to come across a unit optimal response which optimizes the whole cost functions. Otherwise, it is not feasible to find a response which optimizes all cost functions. In fact, since $F(x)$ is a vector, any other components of $F(x)$ are competing with each other and there is no unique solution for this problem. If $\bar{x}_2 \in F$ does not exist to dominate $\bar{x}_1 \in F$, the decision vector $\bar{x}_1$ is called an

optimal Pareto response. The set of optimal Pareto responses is also known as a Pareto optimal front. All solutions on the Pareto optimal front are optimal.

In fact, according to Equation 5, the aim of MOO is to find the optimal Pareto front in which every response minimizes at least one of the two or more objective functions. In other cases, we have to revise Equation 1. For example, if we want both objective functions be maximized, Equation 5 must be rewritten as

$$\bar{x}_1 \succ \bar{x}_2 \leftrightarrow f(\bar{x}_1) \geq f(\bar{x}_2). \quad (6)$$

Now, MOO is defined as follows: Finding vector $\bar{x}^* = [x_1^*, x_2^*, \dots, x_r^*]^T$ in a way that p equality constraints (Equation 3) and m inequality constraints (Equation 4)

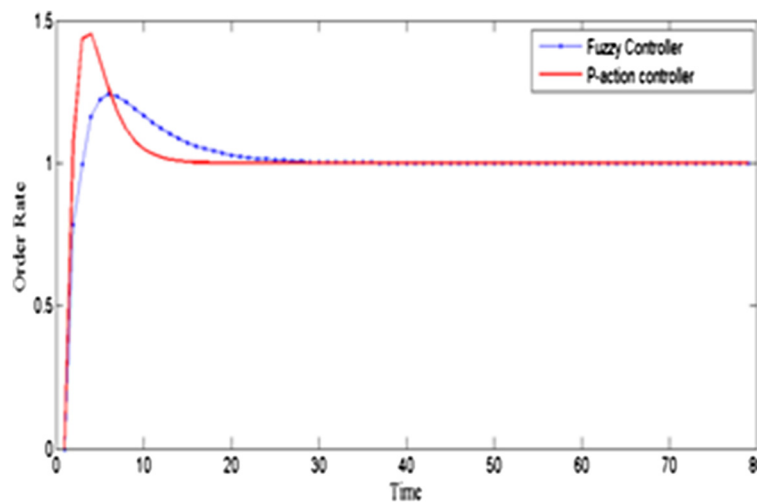


Figure 10 Order rate placed on a supplier with uncertainty.

would be satisfied; likewise, the function vector $f(\bar{x}) = [f_1(\bar{x}), \dots, f_k(\bar{x})]$ is optimized. In other words, we estimate a specific $\bar{x}^*$ in a feasible region which leads to an optimal amount for the whole amount of k in the cost function.

In this article, in order to solve the available MOO problem, MATLAB software is utilized.

Competing interests

Both authors declare that they have no competing interest.

Authors' contributions

The work presented here was carried out as a collaboration between MJT and MG. Both authors read and approved the final manuscript.

Authors' information

Dr. MJT is an assistant professor in the Industrial Engineering Department at K.N.Toosi University of Technology, Tehran, Iran. Mr. MG is a faculty at Eqlab Lahouri Institute for Higher Education, Mashad, Iran.

Acknowledgments

The authors would like to thank Dr. Mahdi Aliyari, Dr. Hamid Khaloozadeh, and Dr. Mehrdad Kazerooni for their insightful comments and constructive suggestions that have improved the paper.

Author details

¹Mechatronics Department, K.N.Toosi University of Technology, Tehran 19697 64499, Iran. ²Industrial Engineering Department, K.N.Toosi University of Technology, Tehran 19697 64499, Iran.

Received: 1 December 2010 Accepted: 3 March 2012

Published: 7 August 2012

References

- Balan S, Prem V, Pradeep K (2007) Reducing the Bullwhip effect in a supply chain with fuzzy logic approach. *Int J Integrated Supply Management* 3:3
- Banerjee S, Roy TK (2009) Application of the intuitionistic fuzzy optimization in the constrained multi-objective stochastic inventory model. *J Tech* 41:83–98
- Beamon BM (1998) Supply chain design and analysis: models and methods. *International Journal of Production Economics* 55:281–294
- Burbidge JL (1991) Period Batch Control (PBC) with GT—the way forward from MRP. In: Paper presented at the 26th BPICS annual conference, Birmingham, 14–16 November 1991
- Chen Y-W, Larbani M, Liu C-H (2010) Simulation of a supply chain game with multiple fuzzy goals. *Fuzzy Set Syst* 161:1489–1510
- Christer C, Robert F (2002) A position paper on the agenda for soft decision analysis. *Fuzzy Set Syst* 131:3–11
- Deb K (2001) Multi-objective optimization using evolutionary algorithms. Wiley, Chichester
- Dejonckheere J, Disney SM, Towill DR (2003) Measuring and avoiding the Bullwhip effect: a control theoretic approach. *European Journal of Operational Research* 147:567–590
- Disney SM, Towill DR (2003) On the Bullwhip and inventory variance produced by an ordering policy. *Omega* 31:157–167
- Disney SM, Towill DR (2005) Eliminating inventory drift in supply chains. *International Journal of Production Economics* 331–344:93–94
- Foran J (2002) Fuzzy controller optimisation using genetic algorithms. M. Eng Dissertation, School of Electronic Engineering, DCU
- Forrester JW (1961) Industrial dynamics. MIT, Cambridge
- Haralambos S, Panagiotis P, Tarantilis CD, Kiranoudis CT (2008) Dynamic modeling and control of supply chain systems: a review. *Computers & Operations Research* 35:3530–3561
- Hosoda T, Disney SM (2005) On variance amplification in a three echelon supply chain with minimum mean squared error forecasting. *Omega: The International Journal of Management Science* 34:344–358
- Jiuh-Bling S (2005) A multi-layer demand-responsive logistics control methodology for alleviating the Bullwhip effect of supply chains. *European Journal of Operations Research* 161:797–811
- Larbani M (2009) Non cooperative fuzzy games in normal form: a survey. *Fuzzy Set Syst* 160:3184–3210

- Lee HL, Padmanabhan V, Whang S (1997) The bullwhip effect in supply chains. *Sloan Management Review* Spring 38:93–102
- Mahnadm M, Yadollahpour MR, Famil-Dardashti V, Reza Hejazi S (2009) Supply chain modeling in uncertain environment with bi-objective approach. *Computers & Industrial Engineering* 56:1535–1544
- Peter MC, Denis T (2002) Diagnosis and reduction of Bullwhip in supply chains. *Supply Chain Management: An International Journal* 7:64–179
- Ross TM (1995) Fuzzy logic with engineering applications. McGraw-Hill, New York
- Towill DR (1982) Dynamic analysis of an inventory and order based production control system. *International Journal of Production Research* 20:671–687
- Towill DR, McCullen P (1999) The impact of agile manufacturing program on supply chain dynamics. *International Journal of Logistics Management* 10 (1):83–96
- Wang J, Shu YF (2005) Fuzzy decision modeling for supply chain management. *Fuzzy Set Syst* 150:107–127
- Wang Z, Qi G, Gu X, Pan X (2007) Supply chain performance evaluation system for mass customization. *International Journal of Zhejiang University, Eng Sci* 41(9):1567–1571
- Xiaolong Z (2004) The impact of forecasting methods on the Bullwhip effect. *Int J Production Economics* 88:15–27
- Yu X, Zhang Q (2010) An extension of cooperative fuzzy games. *Fuzzy Set Syst* 161:1614–1634

doi:10.1186/2251-712X-8-10

Cite this article as: Tarokh and Ghane: Multi-objective design of fuzzy logic controller in supply chain. *Journal of Industrial Engineering International* 2012 **8**:10.

Submit your manuscript to a SpringerOpen[®] journal and benefit from:

- Convenient online submission
- Rigorous peer review
- Immediate publication on acceptance
- Open access: articles freely available online
- High visibility within the field
- Retaining the copyright to your article

Submit your next manuscript at ► springeropen.com