

Grames, Johanna; Grass, Dieter; Kort, Peter M.; Fürnkranz-Prskawetz, Alexia

Working Paper

Optimal investment and location decisions of a firm in a flood risk area using Impulse Control Theory

ECON WPS, No. 01/2017

Provided in Cooperation with:

TU Wien, Institute of Statistics and Mathematical Methods in Economics, Economics Research Unit (ECON)

Suggested Citation: Grames, Johanna; Grass, Dieter; Kort, Peter M.; Fürnkranz-Prskawetz, Alexia (2017) : Optimal investment and location decisions of a firm in a flood risk area using Impulse Control Theory, ECON WPS, No. 01/2017, Vienna University of Technology, Institute of Statistics and Mathematical Methods in Economics, Research Group Economics, Vienna

This Version is available at:

<https://hdl.handle.net/10419/149990>

Standard-Nutzungsbedingungen:

Die Dokumente auf EconStor dürfen zu eigenen wissenschaftlichen Zwecken und zum Privatgebrauch gespeichert und kopiert werden.

Sie dürfen die Dokumente nicht für öffentliche oder kommerzielle Zwecke vervielfältigen, öffentlich ausstellen, öffentlich zugänglich machen, vertreiben oder anderweitig nutzen.

Sofern die Verfasser die Dokumente unter Open-Content-Lizenzen (insbesondere CC-Lizenzen) zur Verfügung gestellt haben sollten, gelten abweichend von diesen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

Terms of use:

Documents in EconStor may be saved and copied for your personal and scholarly purposes.

You are not to copy documents for public or commercial purposes, to exhibit the documents publicly, to make them publicly available on the internet, or to distribute or otherwise use the documents in public.

If the documents have been made available under an Open Content Licence (especially Creative Commons Licences), you may exercise further usage rights as specified in the indicated licence.

Optimal investment and location decisions of a firm in a flood risk area using Impulse Control Theory



by
Johanna Grames, Dieter Grass,
Peter Kort, Alexia Prskawetz

Optimal investment and location decisions of a firm in a flood risk area using Impulse Control Theory

Working Paper
Vienna University of Technology

Version January 31, 2017

Author

Johanna Grames^{1,2}, Dieter Grass³, Peter Kort^{4,5}, Alexia Prskawetz^{2,6}

- 1) Vienna Doctoral Programme for Water Resource Systems
Vienna University of Technology
<http://www.waterresources.at>
- 2) Institute of Statistics and Mathematical Methods in Economics
Research group Economics
Vienna University of Technology
<http://www.econ.tuwien.ac.at>
- 3) Institute of Statistics and Mathematical Methods in Economics
Research group Operations Research and Control Systems
Vienna University of Technology
<http://www.orcos.tuwien.ac.at>
- 4) Tilburg School of Economics and Management
Econometrics and Operations Research
Tilburg University
<http://www.tilburguniversity.edu>
- 5) Department of Economics
University of Antwerp
<https://www.uantwerpen.be>
- 6) Wittgenstein Centre (IIASA, VID/ÖAW, WU)
Vienna Institute of Demography
<http://www.oeaw.ac.at/vid/>

Contents

1 Abstract	3
1.1 Keywords	3
2 Introduction	4
3 General model	7
3.1 Flood impact	7
3.2 Firm's expected profit	7
3.3 Impulse investments in flood defense	8
3.4 The firm's optimal decisions	9
3.4.1 Optimal capital investment	10
3.4.2 Shadow prices	11
3.4.3 Optimal flood defense	11
4 Benchmark model	13
5 Alternative scenarios	18
5.1 The role of sustainability	18
5.2 The economic situation	20
5.3 Sociohydrological feedbacks	21
6 Conclusions	23
7 Acknowledgements	24
A Additional derivations and explanations	25
A.1 Necessary Optimality Conditions	25
A.2 Derivation of equations for Section 3.4	26
A.3 Derivation of \bar{H}	26
B Numerical solution	27
C References	29

1 Abstract

Flooding events can affect businesses close to rivers, lakes or coasts. This paper provides a partial equilibrium model which helps to understand the optimal location choice for a firm in flood risk areas and its investment strategies. How often, when and how much are firms willing to invest in flood risk protection measures? We apply Impulse Control Theory and develop a continuation algorithm to solve the model numerically.

We find that, the higher the flood risk and the more the firm values the future, i.e. the more sustainable the firm plans, the more the firm will invest in flood defense. Investments in productive capital follow a similar path. Hence, planning in a sustainable way leads to economic growth. Sociohydrological feedbacks are crucial for the location choice of the firm, whereas different economic settings have an impact on investment strategies. If flood defense is already present, e.g. built up by the government, firms move closer to the water and invest less in flood defense, which allows firms to accrue higher expected profits. Firms with a large initial productive capital surprisingly try not to keep their market advantage, but rather reduce flood risk by reducing exposed productive capital.

1.1 Keywords

optimal investment, location choice, flood, socio-hydrology, Impulse Control Theory, sustainability

2 Introduction

Climate change puts increasing environmental pressure on coastal zones ([Turner *et al.*, 1996]) and on areas around lakes and rivers ([Vörösmarty *et al.*, 2000]). On top of the list of potential impacts of climate change are effects of sea level rise on coastal cities and effects of extreme events on built infrastructure like floods from heavy precipitation events ([Hunt & Watkiss, 2011]). Floods and other extreme weather events increase economic losses ([Easterling *et al.*, 2000]). Large-scale flood disasters from recent years gained attention among decision makers (e.g. businesses). Implementing actions to reduce disaster risks and build flood resilience facing limited resource needs decision support tools ([Mechler *et al.*, 2014]).

River and Coastal engineers develop risk-analysis techniques for high-level planning and detailed designs using simulation models ([Sayers *et al.*, 2002]). Economic approaches are cost-effectiveness analyses, multi-criteria analyses, robust-decision-making approaches and dynamic programming ([Zwaneveld & Verweij, 2014, Eijgenraam *et al.*, 2012, Eijgenraam *et al.*, 2014]). The most popular tool is cost-benefit analysis applied to cities ([Lichfield, 1960, Hunt & Watkiss, 2011]), regions, and countries (e.g. [Jonkman *et al.*, 2004]).

There is a number of methods to control floods. Coastal defenses can be e.g. sea walls, beach nourishment, barrier islands or tide gates in conjunction with dykes and culverts. Next to rivers one can construct levees, lakes, dams, reservoirs, bunds, weirs or retention ponds to hold extra water during floods. Moreover, floodways, water gates, diversion channels, temporary barriers or a property level protection can be built. Often flood control measures significantly change the environment and also influence the water system. E.g. levees increase downstream flow and diversion channels redirect water to another area. Both effects increase flood risk nearby. In addition, flood risk increases due to the levee effect ([Collenteur *et al.*, 2015]), i.e. people and businesses feel save and move closer to river and exposed capital accumulates. Other flood control systems like temporary perimeter barriers are not fool proof and can cause unexpected flood damage [Wald, 2011]. Last, but not least, constructions can restrain the function of a natural flood plain and therefore increase flood risk.

To sum up, installing flood control measures decreases flood risk, but the effect can be significantly reduced when the flood control measure induces feedbacks on the flood hazard or the exposed capital. We include this socio-hydrological feedback mechanism in our model and study its implications for the system dynamics.

Often investments in flood risk protection measures are done by the government. In this paper we aim to identify the firm's willingness to pay for flood protection. Furthermore, also actions to reduce flood risk can be taken at the firm-level ([Johnson & Priest, 2008]). Businesses can install their own prewarning systems, choose a more expensive but safer technology for building the production plant, adjust the production process by using a safer construction technology or another type of machines. Last, but not least, more expensive labour agreements attract better human resources.

While our focus is on the firm's investment decisions we also investigate whether and to which extend the firm level decisions are influenced by investments of the government.

The aim of this paper is to understand investment decisions of firms and their implications on businesses in flood risk areas. [Viglione *et al.*, 2014] and [Di Baldassarre G., 2013] developed a conceptual descriptive model to understand the feedbacks of flood risk reduction (i.e. investments in flood defense and moving away from the river) and flood damage from a societal perspective. [Grames *et al.*, 2016] introduced an optimal decision framework to investigate the interaction of a society's investment in flood defense and productive capital. In this paper we

look at a partial equilibrium model and try to understand the firm's investment decisions in its interrelations with the hydrological system. A representative firm can have multiple choices: First, it can choose the optimal location for its production plant, second the optimal investment in capital used for production and third, the optimal investment in flood risk reduction measures.

To implement this diverse decision framework our paper rests on three building stones. One building stone consists of so called capital accumulation models where optimal control theory is applied to determine the firm's optimal investment behavior over time. This literature starts out with [Eisner *et al.*, 1963] and later contributions include [Davidson & Harris, 1981], [Barucci, 1998] and [Grass *et al.*, 2012].

Another building stone are the impulse control models that consider e.g. dike height optimization, see [Chahim *et al.*, 2013]. Subject to a water level that increases over time, the decision maker has to decide about the optimal timing and size of the increase of the dike height in order to find an optimal balance between the costs associated with dike height increases and the improved flood protection that results from a dike height increase. This strand of literature abstracts from (firm) investments so that the economic value of the protected land develops exogenously.

The Impulse Control Problem is solved using the impulse maximum principle ([Blaquière, 1985], [Rempala & Zabczyk, 1988], [Chahim *et al.*, 2012]). The general theory of viscosity analysis and quasivariational inequalities (e.g. [Barles, 1985], [El Farouq *et al.*, 2010]) is more consistent, in the sense that it allows more general statements under less restrictive assumptions, covering as many specific cases as possible. However, for the model in this paper the Impulse Maximum Principle seems quite appropriate for an economic interpretation and its numerical calculation.

The underlying paper combines these two approaches, i.e. (impulse) investments have to be undertaken to protect the firm from floods while at the same time the firm establishes an optimal investment pattern that directly influences its economic value.

The third building stone is the optimal location choice for the firm's production plant (Fig.1) additional to the investment decisions. This location choice is like the choice of technology explained in [Brito, 2004]. A location closer to the water is more profitable in the sense that the water's infrastructure (transportation, cooling) is easier available and the site is more attractive for labour force and consumers. But on the other hand being closer to the river implies that the firm faces a larger risk of being flooded.

In location theory [Glatte, 2015] defines three categories for site selection framework condi-

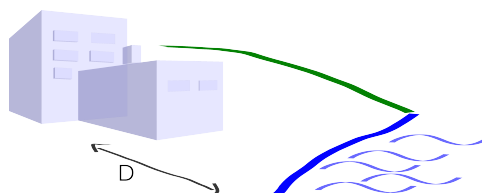


Figure 1: The firm chooses where to build its production plant by choosing the distance to the water.

tions: technical and architectural, economic, and legal, whereas [Goette, 1994] distinguishes between economic site conditions (sales potential, competitive conditions, infrastructure and transportation costs, labor, monetary conditions), political site conditions (tax legislation, environmental protection, institutional market entry barriers, support of business, political risks),

cultural site conditions (differences in language, mentality, religion, and the lack of acceptancy of foreign companies), and geographical site conditions (climate, topography). Natural hazards are often missing in the site selection literature and the only quantitative methods are cost-benefit analysis or cost-effectivness analysis ([Glatte, 2015]). We introduce a conceptual framework where firms take economic and environmental conditions into account which in turn are affected by the firm's decisions.

The firm's decisions are based on an optimization problem, where in a first step the firm is controlling its investments. In a second step, the firm aims to find the optimal location knowing that revenues and costs will depend on the location choice. The firm can only choose its optimal location after having determined the set of optimal investment strategies. The planning horizon is finite, but the firm also considers its salvage value at the end of the planning period. Entrepreneurs do consider only a finite life cycle of a firm. Family businesses may plan in longer terms.

For the firm's profit maximization only costs are relevant, which can be transferred to monetary values. Consequently, flood damage is measured by so called direct tangible costs ([Merz *et al.*, 2010]). We assume the firm building a production plant with a lot of tangible capital. Direct flood damage reflects the costs of replacing damaged capital ([Veen & Logtmeijer, 2005]).

The aim of the paper is to understand the investment decisions of a representative firm in a flood risk area. We want to identify how much, how often, and when a firm is willing to invest in flood risk protection measures and what the optimal location choice is. Our qualitative model helps to understand feedback mechanisms between the firm's decisions and the hazard of flooding. In Section 3 we explain the general model and its analytical solutions. After discussing the numerical solution of the benchmark model in Section 4. In Section 5 we investigate the impact of sustainable planning, the economic situation and the sociohydrological feedbacks. Section 6 concludes the paper and some detailed derivations are given in the Appendix.

3 General model

In this section we set out the general model of investment planning in a flood risk area, setting up the Hamiltonian and Impulse Hamiltonian of the representative firm and deriving necessary conditions for optimally determining flood protection and productive investments. The location choice is done in a second step based on the set of optimal decisions.

3.1 Flood impact

We model a firm located in a flood risk area. The expected flood water level above bankfull

$$W(t) = W_0 + \eta t, \quad (1)$$

is some initial water level $W(0) = W_0$ and increases with η [cm/year] due to climate change ([Eijgenraam, 2016]). Anthropogenic flood risk protection $H(t)$, although decreasing flooding occurrences, may increase flood water levels and consequently flood risk, because e.g. higher dikes make it more difficult for water to stream back in the see/river after land has been flooded. We model this like [Grames *et al.*, 2016] and [Viglione *et al.*, 2014] by adding an additional amount of water due to man-made flood risk protection measures $\xi_H H(t)$. ξ_H is the sociohydrological parameter describing the feedback of flood risk protection measures $H(t)$ to flood risk. The resulting flood intensity $W(t) + \xi_H H(t)$ can be alleviated by increasing the minimum distance to water D_0 by the amount D for the location of the firm's production plant in the floodplain with slope α_D . Consequently, the flood impact in times of flooding ($W(t) + \xi_H H(t) > H(t)$) is

$$F_I(W(t), D, H(t)) = \frac{W(t) + \xi_H H(t)}{\alpha_D(D_0 + D)}. \quad (2)$$

If the flood impact $F_I(W(t), D, H(t))$ exceeds the current height of flood protection (e.g. dikes, levees) $H(t)$, damage occurs. According to [Chahim *et al.*, 2013] the flood probability $P_F(t)$ [1/year] is given by an initial probability P_0 and increases for a higher water level, but decreases with larger flood risk protection measures (i.e. dikes). This leads to the following flooding probability given a scaling parameter α_F [1/cm].

$$P_F(D, H(t)) = P_0 \exp[\alpha_F(F_I(W(t), D, H(t)) - H(t))] \quad (3)$$

We can rewrite equation (3) to see the effect of socio-hydrological feedbacks even better. $H(t)$ is diminished by the factor $(1 - \frac{\xi_H}{\alpha_D(D_0 + D)})$.

$$P_F(D, H(t)) = P_0 \exp[\alpha_F(\frac{W(0) + \eta t}{\alpha_D(D_0 + D)} - (1 - \frac{\xi_H}{\alpha_D(D_0 + D)})H(t))] \quad (4)$$

The relative flood damage in case of floods increases with higher flood impact $F_I(t)$ and is the proportion $F(W(t), D, H(t)) \in [0, 1]$ of destroyed capital following [Grames *et al.*, 2016, Viglione *et al.*, 2014].

$$F(W(t), D, H(t)) = 1 - \exp[-F_I(W(t), D, H(t))] \quad (5)$$

3.2 Firm's expected profit

The firm is in a competitive market and produces output $Y(t)$ choosing the production factors capital $K(t)$ and the distance D to a river or coast in the sense that living closer to the water yields advantages for transport, lowers costs of transporting water to households and industry and is attractive for employees (see [Viglione *et al.*, 2014]). The effect of D on output is similar to a technological parameter as it scales the firm's output level for a given set of the other production factors (e.g. [Brito, 2004]). We assume a minimum necessary distance to the water body D_0 . The production function has a Cobb-Douglas form and reads

$$Y(K(t), D) = \frac{1}{D_0 + D} K(t)^\alpha \quad (6)$$

with $\alpha \in [0, 1]$. We assume that the firm can sell all its output $Y(t)$ for a price p normalized to 1.

The firm invests $I_K(t)$ in its physical capital which depreciates with rate $\delta_K \in [0, 1]$.

$$\dot{K}(t) = I_K(t) - \delta_K K(t) \quad (7)$$

The costs for capital investment are $\alpha_K I_K(t)^2$ with α_K as a constant scaling parameter.

The value of flood damage $C_F(K(t), F(t))$ is the sum of costs for repairs and clean up, and costs for lost revenue due to business interruption. First, we assume that repair costs are just as high as the damaged physical capital stock, depending on the impact of flooding $F(t) \in [0, 1]$.

$$C_F(K(t), F(t)) = F(t)K(t) \quad (8)$$

Second, the lost revenue due to business interruption is equal to $P_F(D, H(t))Y(K(t), D)$. Hence, revenue times probability that no flood occurs reads

$$[1 - P_F(D, H(t))]Y(K(t), D). \quad (9)$$

We assume that everything is repaired immediately after the flooding and production continues with the same capital stock $K(t)$ and level of flood protection $H(t)$ after any flooding. [Veen & Logtmeijer, 2005, Leiter *et al.*, 2009, Parkatti, 2013]

To sum up, we can express the expected profit as the difference between expected revenue and expected costs.

$$\begin{aligned} \pi_e(K(t), D, H(t), I_K(t)) = & (1 - P_F(D, H(t)))[Y(K(t), D) - \alpha_K I_K(t)^2] \\ & - P_F(D, H(t))C_F(K(t), F(t)) \end{aligned} \quad (10)$$

3.3 Impulse investments in flood defense

Additionally to investments in capital stock K , the firm can invest in flood risk protection at the expense of costs $I_H(u_i, H(t))$ to add an amount $u_i > 0$ to their flood protection $H(t)$ at specific points in time $t = \tau_i$. Therefore the firm chooses the optimal number $N \geq 0$ of investments, the optimal timing τ_i ($i \in \{1, \dots, N\}$) and the optimal amount $u_i > 0$ ($i \in \{1, \dots, N\}$).

$$H(\tau_i^+) = H(\tau_i^-) + u_i \quad (11)$$

holds for $i \in \{1, \dots, N\}$. Here $H(\tau_i^-)$ is the level of flood risk protection before and $H(\tau_i^+)$ the level of flood risk protection after the i th investment.

We model exponential investment costs in flood defense capital following [Eijgenraam, 2016] with positive constants θ_1 , θ_2 and θ_3 .

$$I_H(u, H(\tau^-)) = \begin{cases} (\theta_1 + \theta_2 u) \exp(\theta_3(H(\tau^-) + u)) & \text{if } u > 0 \\ 0 & \text{if } u = 0 \end{cases} \quad (12)$$

For time $t \notin \{\tau_1, \dots, \tau_N\}$ the flood risk protection capital does not change.

$$\dot{H}(t) = 0 \quad (13)$$

The firm can invest in flood defense capital during a finite planning period $[0, T]$. The total expected profit considering all types of costs can be displayed as follows using the interest rate r to discount future values.

$$\int_0^T \pi_e(K(\tau), D, H(\tau), I_K(\tau)) e^{-r\tau} d\tau - \sum_{i=1}^N I_H(u_i, H(\tau_i)) e^{-r\tau_i} \quad (14)$$

The value of the firm at the end of the planning horizon T is the difference between expected remaining capital $[1 - P_F(D, H(T))]K(T)$ and expected damage $P_F(D, H(T))F(D, H(T))K(T)$.

$$V(K(T), D, H(T)) = [1 - P_F(D, H(T))]K(T) - P_F(D, H(T))F(D, H(T))K(T) \quad (15)$$

To model not only the expected profit during the planning period we additionally consider the expected value $V(K(T), D, H(T))$ of the firm after the planning period. Therefore we use the so-called salvage value ([Chahim *et al.*, 2013]). Note, that the firm does not make any new decisions after the planning period.

$$\int_T^\infty V(K(T), D, H(T)) e^{-rt} dt = \frac{1}{r} e^{-rT} V(K(T), D, H(T)) \quad (16)$$

3.4 The firm's optimal decisions

The firm maximizes accumulated discounted profit given an interest rate r within a finite planning time horizon expecting floods at unknown times. As a first step it solves the problem for a given value of D . It can choose the number N of flood defense investments to increase flood risk protection measures by $u_i > 0$ and its timings τ_i during the finite planning period $[0, T]$. It also controls the investment in physical capital $I_K(t) > 0$ during the planning period and takes into account the salvage value $V(K(T), D, H(T))$ weighted with a time preference δ_S .

$$\begin{aligned} & \max_{\{u_i, \tau_i, N, I_K(t)\}} \int_0^T \pi_e(K(\tau), D, H(\tau), I_K(\tau)) e^{-r\tau} d\tau \\ & - \sum_{i=1}^N I_H(u_i, H(\tau_i)) e^{-r\tau_i} + \delta_S \frac{1}{r} e^{-rT} V(K(T), D, H(T)) \end{aligned} \quad (17a)$$

To summarize, the dynamics of the state variables $K(t)$ and $H(t)$ are

$$\dot{K}(t) = I_K(t) - \delta_K K(t) \quad (17b)$$

$$\dot{H}(t) = 0 \quad \text{for } t \notin \{\tau_1, \dots, \tau_N\} \quad (17c)$$

$$H(\tau_i^+) = H(\tau_i^-) + u_i \quad \text{for } i \in \{1, \dots, N\} \quad (17d)$$

and their initial values are $K(0) = K_0$ and $H(0^-) = 0$.

In the second step, the firm chooses the optimal location (D) for its production plant given the solutions of problem (17).

3.4.1 Optimal capital investment

We follow the work from [Chahim *et al.*, 2012] to derive the necessary optimality conditions for our maximization problem by applying the Impulse Control Maximum Principle (see Appendix A.1). So we obtain the optimal paths of the decision variables and the costates.

The optimal dynamics of the investment in physical capital between the impulse investments is given by Eq.(18). The firm increases investments in physical capital if the interest rate is high and the depreciation rate is high. If the expected output per physical capital is already high, the firm slows down investment, whereas investment is increased for a higher capital stock or a higher shadow price of the capital stock. Moreover, the elasticity of physical capital in the production function has a negative impact on the investment decision. Marginal investment increases if the expected damage rate increases. Investment decreases if the water level rises.

$$\begin{aligned} \dot{I}_K(t) = & I_K(t) \left[r + \delta_K - \frac{\alpha}{\lambda_K} \frac{(1 - P_F(D, H(t)))Y(K(t), D)}{K(t)} \right. \\ & \left. + \frac{1}{\lambda_K} P_F(D, H(t))F(D, H(t)) + \frac{\alpha_F}{\lambda_K} \frac{P_F(D, H(t))}{1 - P_F(D, H(t))} \frac{\eta}{\alpha_D D} \right] \end{aligned} \quad (18)$$

Solving the differential equation from the first order conditions and the transversality condition yields the net present value for the expected optimal investment in physical capital $I_K(t)$ at time t .

$$\begin{aligned} (1 - P_F(D, H(t)))I_K(t) = & \\ \frac{1}{2\alpha_K} \int_t^T & \frac{\alpha[1 - P_F(D, H(s))]Y(K(s), D) - P_F(D, H(s))F(D, H(s))K(s)}{K(s)} e^{-(r+\delta_k)(s-t)} ds \\ + e^{-(r+\delta_k)(T-t)} & \frac{1}{r} \frac{\alpha}{2\alpha_K} [1 - P_F(D, H(T))] \frac{Y(K(T), D)}{K(T)} - P_F(D, H(T))F(D, H(T)) \end{aligned} \quad (19)$$

Given lower investment costs ($2\alpha_K$) the firm invests more in physical capital. Additionally, more expected output per capital in the future in a more capital intense production (α) increases the investment. On the other side, a higher expected damage rate decreases the optimal investment. To conclude, expression (19) shows that the productive investment rate is determined such that the resulting expected revenue stream, including the increase in the salvage value, due to a marginal investment, equals the expected marginal investment costs.

At the end of the planning period T the optimal investment rate will be equal to the difference between expected outcome per capital and expected damage per capital.

$$\begin{aligned} (1 - P_F(D, H(T)))I_K(T) = & \\ \frac{1}{r} \frac{\alpha}{2\alpha_K} & [1 - P_F(D, H(T))] \frac{Y(K(T), D)}{K(T)} - P_F(D, H(T))F(D, H(T)) \end{aligned} \quad (20)$$

3.4.2 Shadow prices

Analogous to the derivation of Eq.(19) we obtain the net present value of the shadow price for investment in flood defense.

$$\begin{aligned}
\lambda_H &= \int_t^T (P_F(D, H(s))\alpha_F(1 - \frac{\xi_H}{\alpha_D(D_0 + D)})[Y(K(s), D) - \alpha_K I_K(s)^2 - F(D, H(s))] \\
&\quad - P_F(D, H(s))(1 - F(D, H(s)))(\frac{\xi_H}{\alpha_D(D_0 + D)})e^{r(t-s)} ds \\
&\quad - e^{r(t-T)} \frac{1}{r} P_F(D, H(T))\alpha_F(1 - \frac{\xi_H}{\alpha_D(D_0 + D)})[Y(K(T), D) - \alpha_K I_K(T)^2 - F(D, H(T))] \\
&\quad - P_F(D, H(T))(1 - F(D, H(T)))(\frac{\xi_H}{\alpha_D(D_0 + D)}) \tag{21}
\end{aligned}$$

The shadow price of flood protection increases with expected future losses (i.e. lost profit and damaged capital) and decreases with expected sustained capital. The shadow price λ_H increases if sociohydrological feedbacks are more intense and if the firm decided to build the production plant closer to the water.

The transversality conditions Eq.(35) yield expressions for the shadow prices at time T^+ .

$$\lambda_K(T^+) = \frac{1}{r} \alpha \frac{[1 - P_F(H(T^+), D)]Y(K(T^+), D)}{K} - P_F(H(T^+), D)F(H(T^+)) \tag{22a}$$

$$\begin{aligned}
\lambda_H(T^+) &= \frac{1}{r} P_F(H(T^+), D) [\alpha_F(1 - \frac{\xi_H}{\alpha_D(D_0 + D)}) (Y(K(T^+), D) - \alpha_K I_K(T^+)^2 \\
&\quad + F(H(T^+), D)K(T^+))] \tag{22b}
\end{aligned}$$

The shadow price for physical capital at the end of the planning period (22a) equals the discounted difference of expected output per capital and the expected damage rate. The shadow price for flood defense capital at T^+ is the expected loss from flooding, i.e. the sum of the revenue due to business interruption $P_F(H, D)Y(K, D)$, the avoided costs at the time of the flood $-P_F(H, D)(\alpha_K I_K^2)$ and the direct damage as the value of repair and clean up costs $P_F(H, D)F(H)K$.

3.4.3 Optimal flood defense

Firms invest in flood defense when marginal costs equal marginal gain at the jump point τ_i ($u_i > 0$). This is shown by the first order impulse conditions

$$\lambda_H(\tau_i^+) = \frac{\partial I_H}{\partial u}(u_i, H(\tau_i^-)) = (\tilde{\theta}_1 + \tilde{\theta}_2 u_i) \exp(\theta_3(H(\tau^-) + u_i)), \tag{23}$$

where $\tilde{\theta}_1 := \theta_2 + \theta_1 \theta_3$ and $\tilde{\theta}_2 := \theta_2 \theta_3$, and the jumping condition,

$$\begin{aligned}
\lambda_H(\tau_i^+) - \lambda_H(\tau_i^-) &= \frac{\partial I_H}{\partial H}(H(\tau_i^-), u_i, \lambda_H(\tau_i^+), \tau_i) \\
&= (\tilde{\theta}_3 + \tilde{\theta}_2 u_i) \exp(\theta_3(H(\tau^-) + u_i)), \tag{24}
\end{aligned}$$

where $\tilde{\theta}_3 := \theta_1 \theta_3$.

At the jump points, i.e. when the firm invests in flood protection, the increase in expected profit should equal the investment costs or be higher at the initial point in time provided the firm invests in flood protection at this time.

$$\begin{aligned} & \pi_e(K(\tau_i), D, H(\tau_i^+), I_K(\tau_i^+)) - \pi_e(K(\tau_i), D, H(\tau_i^-), I_K(\tau_i^-)) \\ & + \lambda_K(\tau_i^+)[I_K(\tau_i^+) - \delta_K K(\tau_i^+)] - \lambda_K(\tau_i^-)[I_K(\tau_i^-) - \delta_K K(\tau_i^-)] \\ & - rI_H(u_i, H(\tau_i^-)) = \begin{cases} > 0 & \text{if } \tau_i = 0 \\ = 0 & \text{if } \tau_i \in (0, T) \\ < 0 & \text{if } \tau_i = T \end{cases} \end{aligned} \quad (25)$$

If we assume that for every planning horizon T there exists a unique optimal solution for our problem (17) with a finite number of jumps, we can derive the optimal impulse control value u_i ([Grass & Chahim, 2012]).

With the necessary condition Eq.(23) we obtain an implicit function of the optimal value u_i at time τ_i .

$$H(\tau_i^-) + u_i = -\ln((\tilde{\theta}_1 + \tilde{\theta}_2 u_i)^{\frac{1}{\theta_3}}) + \ln(\lambda_H(\tau_i^+)^{\frac{1}{\theta_3}}) \quad (26)$$

$\frac{\partial^2 IHam}{\partial u^2}(u_i, H(\tau_i^-))$ is always negative for $u \geq 0$ and ensures that u_i is optimal.

Furthermore, we are able to identify an upper bound \bar{H} for the level of flood defense capital H given an optimal solution. The detailed derivation is found in Appendix A.3.

$$\bar{H} = \frac{\ln\left(\frac{P_0 \alpha_F (Y+K)}{r \theta_1 \theta_3}\right) + \alpha_F \frac{W_0 + \eta T^+}{\alpha_D (D_0 + D)}}{\theta_3 + \alpha_F \left(1 - \frac{\xi_H}{\alpha_D (D_0 + D)}\right)} \quad (27)$$

So we know $\bar{H} > H(T^+)$. Since the water level (1) is increasing it holds that $H(T^+) > H(t)$ for all $t \in [0, T]$. \bar{H} still depends on $Y(K, D)$ and K , and can therefore vary for different properties of the firm.

\bar{H} increases for a higher flood risk. A higher flood risk can be caused by a higher flood hazard ($P_F(t)$), i.e. the initial flooding probability P_0 or the water level increases or the firm is located closer to the water in a flatter flood plain. Defense capital will also be higher if the damage resulting from a flood is higher, which is the case if exposed capital ($K(t)$) is higher. Flood risk also increases if exposed capital increases. The only parameter to lower \bar{H} are the costs of investments I_H in flood defense.

4 Benchmark model

In this section we show the numerical solution of the model and discuss its economic intuition. To derive numerical solutions for our impulse control problem we apply the (multipoint) boundary value approach ([Grass, 2017]). The idea is to solve a boundary value problem (BVP) based on the system dynamics given by the canonical system and update the according boundary conditions at impulse times. A continuation technique is used to continue and find solutions with different number of impulses. The objective values of such solutions are compared and the optimal solution is chosen. Moreover, the continuation algorithm allows to continue a solution for every model data. Details about the numerical method, which was developed to solve such types of problems, are described in [Grass, 2017]. Details about the application of the numerical method to our proposed model are found in Appendix B. First, we derive the optimal solution for investments depending on the distance D . Second, we plot the objective function evaluated at the optimal investment as a function of D and locate the maximum with respect to D .

We use the following initial conditions. The mean water level above bankfull as well as the flood protection are normalized to zero at the beginning of the planning period. The productive capital initially available for the firm is 10^8 \$. The initial flooding probability is 0.001 per year according to [Chahim *et al.*, 2013]. D is referred to a length measure, but scale free. Still, we can exemplify the minimum distance to the water with 5m. All the variables and their initial conditions are listed in Table 1. The parameters are displayed in Table 2. Many parameters ($r, A, \alpha, \alpha_K, \delta_K$) are chosen according to standard literature, and other parameters (τ_k, α_P) are scaling factors. Most hydrology parameters $\xi_H, \alpha_D, \alpha_F$ are defined in [Viglione *et al.*, 2014]. Investment costs in flood protection $\theta_1, \theta_2, \theta_3$ and natural water level rise η are introduced in e.g. [Chahim *et al.*, 2013, Eijgenraam, 2016]. We choose a shorter planning horizon T than [Chahim *et al.*, 2013] to reflect a feasible life cycle time of a firm ([Lumpkin & Dess, 2001]). The time discount of the salvage value δ_S is given by $(1 + \delta_L)^T = 1 + \delta_S$, where δ_L denotes a standard yearly time preference rate. Note, r represents the interest rate of the capital market and is not necessarily equal to the more individual time preference rate δ_L . In addition to the the benchmark values we have also listed the values for sensitivity analysis described in the next sections. Note, that our numerical calculations are aimed to provide a qualitative analysis to understand feedbacks and mechanisms within a sociohydrological model of floodings.

The optimal solution is to locate the firm's production plant rather close to the water (Fig.4) and to make two impulse investments in flood risk protection measures (Fig.2(b)). The dynamics of the capital K and the flood defense H are displayed in Fig.2. The first jump occurs very early so that the risk of flooding is very small and the firm can invest in its capital to gain high expected revenues. Since flood risk is increasing with time (Eq.(1)) the firm's investments (Fig.3) decrease as well. We observe an anticipation effect of the firm, since capital investment increases shortly before the second impulse investment. At the time of an impulse investment I_H the continuous investment I_K jumps too.

The second impulse investment is in the last third of the planning period and just as high as the upper bound \bar{H} derived in Eq.(27).

Investments in flood risk protection measures increase economic activity. We can identify that whenever the firm feels saver, it invests more. This is a positive feedback loop and leads to sustainable economic growth, because the firm's capital is high and flood risk is low.

Moving closer to the water increases production output, but also increases flood risk. Depending on which effect dominates, the expected profit either increases to the left of the peak

Table 1: Variables of the model

variable	Interpretation	Unit		
t	time	[year]		
$K(t)$	productive capital	10^6 \$		
D	firm's distance to water	10^2 [m]		
u_i	height of i^{th} increase in flood protection measures	[cm]		
$H(t)$	level of flood protection	[cm]		
τ_i	timing of i^{th} investment in flood defense	[year]		
N	number of investments i	[]		
$I_H(t)$	costs for investment in $H(t)$	10^6 \$		
$\pi_e(t)$	firm's expected profit	10^6 \$		
$Y(t)$	firm's output	10^6 \$		
$I_K(t)$	investment in physical capital	10^6 \$		
$C_F(t)$	total costs of flooding	10^6 \$		
$W(t)$	water level	[cm]		
$F(T)$	proportion of flooding damage	[0,1]		
$F_I(T)$	flood impact	[]		
$P_F(t)$	flooding probability	[1/year]		
$\lambda_K(t)$	shadow price of physical capital	10^6 \$		
$\lambda_H(t)$	shadow price of flood protection	10^6 \$		
<hr/>				
Initial values	Interpretation	Unit	Value	case
W_0	initial water level	[cm]	0	
K_0	initial productive capital	10^6 \$	100	500
H_0	initial flood protection	[cm]	0	200
P_0	initial flooding probability	[1/year]	0.001	
αP_0	numerical initial flooding probability	[1/year]	0.1	

Table 2: Parameters of the model and their units of measurement

Parameter	Interpretation	Unit	Base case	Case study
D_0	minimal distance to water	$10^2[m]$	0.05	
T	end time of planning period	[year]	100	50,150
r	interest rate	[1/year]	0.03	
A	technology	[]	1	
α	output elasticity of physical capital	[0,1]	0.3	
α_K	scale for expected investment in $K(t)$	[]	0.01	
τ_K	scale for deterministic investment in $K(t)$	[]	0.01	
δ_K	depreciation rate of $K(t)$	[1/year]	0.05	
θ_1	fixed costs for investing in $H(t)$	10^6 \$	100	
θ_2	linear costs for investing in $H(t)$	10^6 \$/cm	0.5	
θ_3	exponential costs for investing in $H(t)$	$[\ln(10^6 \text{ \$})/\text{cm}]$	0.005	
$\tilde{\theta}_1$	transformed fixed costs for investing in $H(t)$	10^6 \$	$\theta_2 + \theta_1\theta_3$	
$\tilde{\theta}_2$	transformed linear costs for investing in $H(t)$	10^6 \$	$\theta_2\theta_3$	
η	increase of water level per year	[cm/year]	0.5	
ξ_H	Additional rise of the water level due to existing defense capital	[]	0.3	0, 0.5
α_D	scale of the slope of the floodplain	[]	10	
α_F	scaling of flooding probability	[1/cm]	0.05	
δ_S	time discount of salvage value	[0,1]	0.1	0, 0.25
α_P	approximation parameter for flooding probability	[]	100	

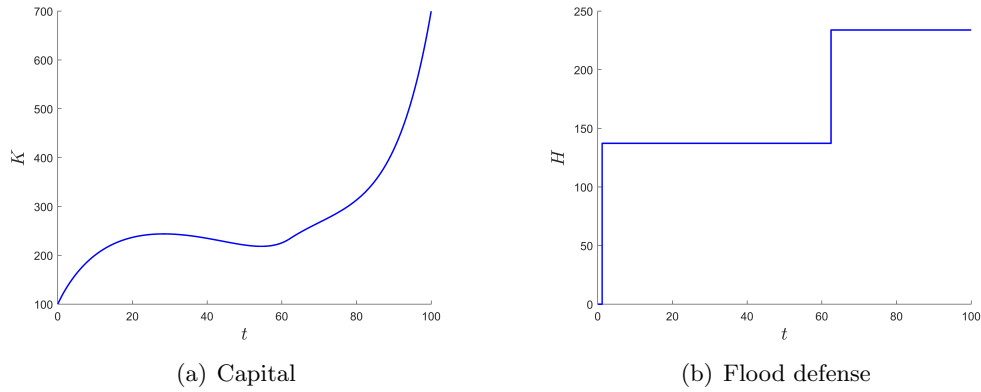


Figure 2: State dynamics in the planning period $[0, T]$. Firm's capital K (a) increases only when the flood risk is low in consequence of a high flood risk protection standard (b).

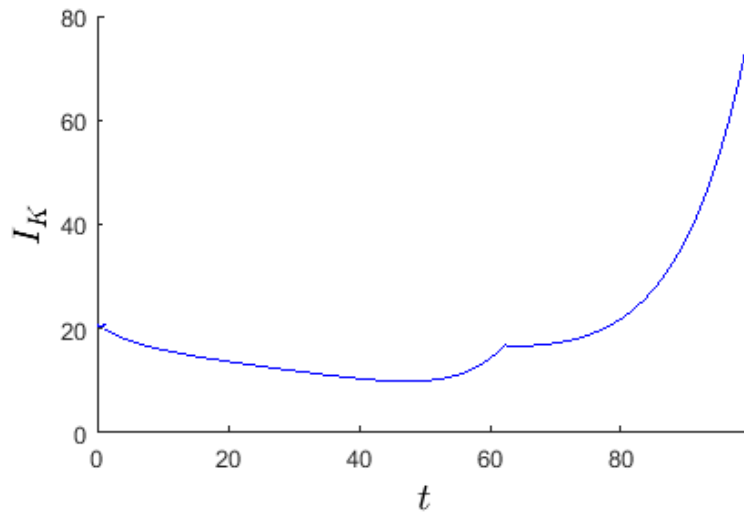


Figure 3: Capital investment I_K

or decreases to the right of the peak. One can identify this interesting trade-off in Fig.4, where we find the optimal location of the firm's production plant (D) at the peak of the value function V^* of problem set Eqs.(17).

It is optimal to make two impulse investments (Fig.4). Investing more often is always slightly worse, because fixed costs occur more often. Investing in flood defense only once or even never would be only better if the firm is located closer to the river, but the objective value decreases. This would imply that the production output is higher in the beginning and the expected profit much less at the end of the planning horizon because flood risk is increasing dramatically. This leads also to a lower salvage value at the end of the planning horizon.

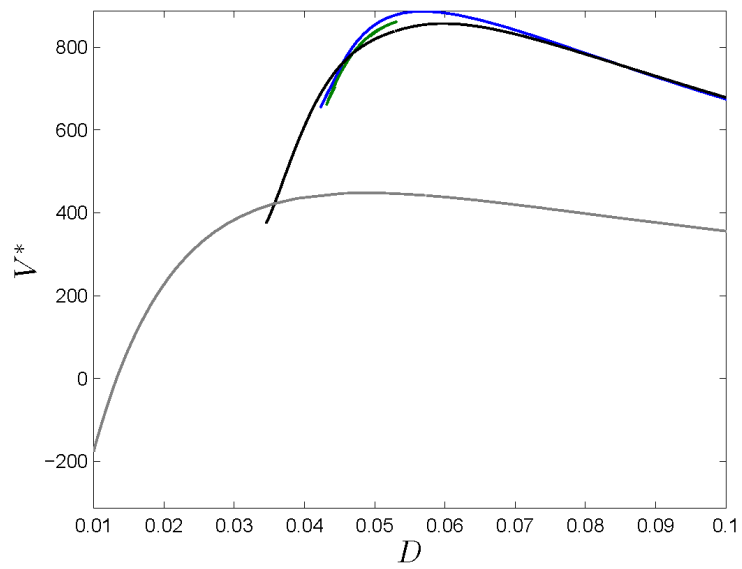


Figure 4: Solution structure given by the objective value V^* depending on D for no impulse investments (grey), one impulse investment (black), two impulse investments (blue) and three impulse investments (green).

5 Alternative scenarios

In this section we discuss the optimal investment decisions from the perspective of sustainability, the economic setting and the socio-hydrological feedbacks. The firm has always three options to adapt to different situations. First, it can choose the number and amount of investment in flood risk protection measures. Second, it can choose the investment strategy in its capital within the planning period. Third, it can choose the location for its production plant.

We will compare the different scenarios to the benchmark model to understand which option is most suitable to adapt optimal investment decisions for a different hydrological and economic setting.

5.1 The role of sustainability

Two parameters reflect how important sustainability is for the decision making firm. On the one hand, the salvage value at the end of the planning period is weighted with a certain time preference rate δ_S . On the other hand, the planning horizon T is important for the investment decisions. We will discuss both options in detail.

If the value of the firm at the end of the planning period is important ($\delta_S > 0$), firms care about good flood risk protection measures in the long run and its net present value is significantly higher. The optimal location of the firm's production plant is to increase the distance to the water body. But the more crucial impact is the investment behaviour towards the end of the planning horizon. Fig.5 shows the time paths of the firms capital K and the flood defense H for different time preference parameters δ_S . The investment behaviour in the beginning is rather similar, but for a higher δ_S the firm invests much more at the end of the planning period in its productive capital. Furthermore, the firm is willing to invest more often in flood defense.

Decision makers in firms with a high time preference rate δ_S can be e.g. families, entrepreneurs who are confident about a long life time of their product(s) or entrepreneurs who are able to adapt to changing environment and market demand.

If the firm cannot be sold at the end ($\delta_S = 0$) because its product will be outdated and the firm cannot survive on the market anymore, it still invests once to protect itself from floods but tries to make a lot of profits only in the short term. After some time it will neither invest in its own capital ($I_K = 0$) nor in flood defense. So the risk of being flooded is much higher.

Even if a firm "only" cares about its own value it is willing to invest in flood risk protection measures and increases economic activity. This is important for the whole region.

Firms who do not expect to be on the market for a long time do not care (much) about flood protection. Fig.6 shows the number of impulse investments and the net present value of the firm for various planning horizons T .

If the planning period is only a few years firms do not invest in flood defense, and the net present value V^* of the firm is also relatively low.

Firms with a planning horizon around thirty years are most valid. They optimally invest once in flood protection after some years and not in the very beginning.

When a firm plans for more than seventy years it optimally invests (at least) twice in flood defense, and the first investment is already very early. Moreover, Fig.7 b) shows that the early impulse investment with a planning horizon of 150 years doubles the amount of impulse investment of a firm with a planning horizon of 50 years. Additionally, firms with a longer planning horizon invest more in their capital already in the beginning (see Fig.7 a)).

The only disadvantage of investing a lot in flood defense is the necessity to save for these

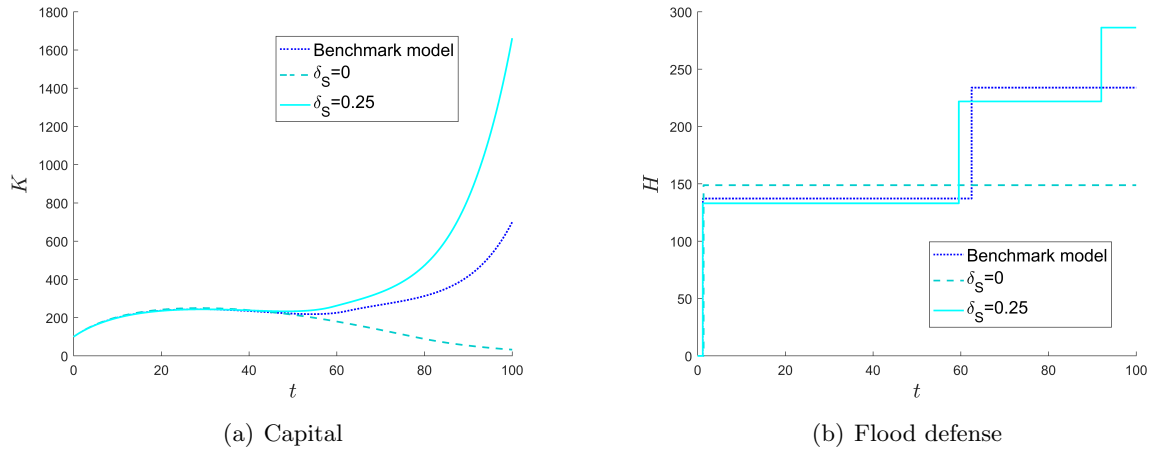


Figure 5: State dynamics for $\delta_S = 0$ (dashed blue line), $\delta_S = 0.1$ (dotted dark blue line) and $\delta_S = 0.25$ (solid light blue line) in the planning period $[0, T]$. If the salvage value of the firm is important (a) firm's capital K increases towards the end of the planning horizon and (b) firms invest more and more often in flood risk protection measures.

investments and consequently invest less in the firms productive capital. This could lead to a regression. Firms would be able to keep investing in their physical capital if e.g. the state government is building the flood defense. To sum up, a sustainable planning process (longer planning horizon) of the firms increases GDP already in the beginning and guarantees a safe environment.

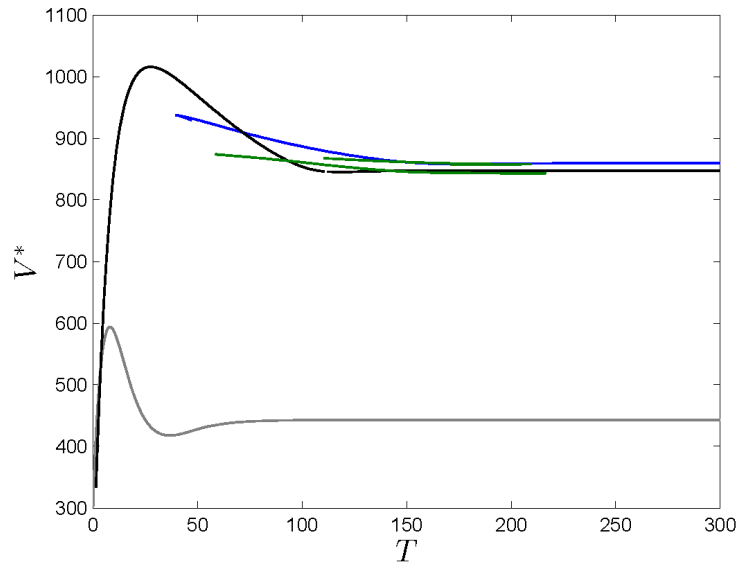


Figure 6: Solution structure given by the objective value V^* depending on the planning horizon T for no impulse investments (grey), one impulse investment (black), two impulse investments (blue) and three impulse investments (green)

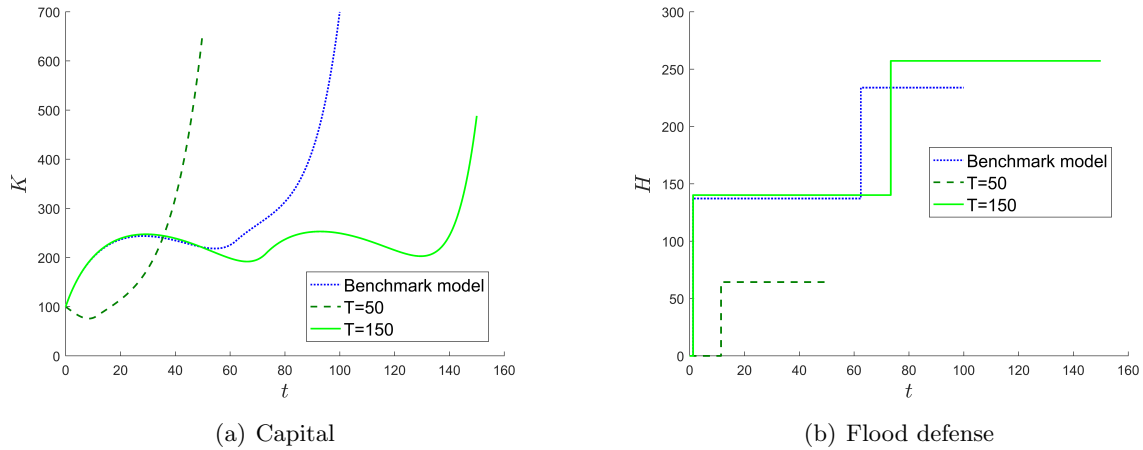


Figure 7: State dynamics for planning horizon $T = 50$ (dashed dark green line), $T = 100$ (dotted blue line) and $T = 150$ (solid light green line). If the planning horizon T is longer (a) firms invest more in capital K even in the beginning and (b) firms invest more and more often in flood risk protection measures.

5.2 The economic situation

Depending on the economic situation firms choose different investment strategies. We first analyze a firm in a region where flood protection already exists like e.g. in the Netherlands. Second, we investigate the investment decisions of a firm with a high initial capital stock. This can be a company building a production plant in a country with lower prices or a firm with e.g. state subsidy for its company foundation.

Firms locating in a flood risk area where flood protection measures are already installed build their production plant closer to the water and invest much later in flood defense (Fig.8). Even though the investment behaviour in productive capital is similar to the benchmark model, the expected net present value of the firm is higher because the firm plant is safer and closer to the water.

A firm with high initial productive capital (Fig.8) does not invest more often in flood protection, but it will invest earlier, i.e. already at $t = 0$ and even to a higher extend because the firm has more to loose in case of a flood. Still, its location is only slightly closer to the water. Surprisingly, instead of building extra flood defense, the firm is reducing flood risk by decreasing productive capital K_0 to the level in the benchmark scenario. Consequently, the higher value of the firm (Fig.9 (b)) is only due to higher expected profits at the beginning of the planning period caused by a higher level of initial capital stock K_0 .

We compare the net present value of a firm depending on initial flood defense H_0 and alternatively initial productive capital K_0 (Fig.9). In the first case, investment behaviour changes (i.e. for higher H_0 less impulse investments are optimal). In the second case, investment behaviour does not change (i.e. it is always optimal to invest twice in flood risk protection measures even if the firm could spend on a large one time investment in the beginning).

Not investing in flood risk protection measures (grey line in Fig.9) becomes more attractive for higher H_0 because the firm is safer anyways, whereas for a higher productive capital K_0 it is less profitable because the exposed capital is larger and therefore possible flood damage is larger. Consequently, flood risk is decreasing for higher (initial) flood defense and increasing

for higher (initial) productive capital, since flood risk is defined as the product of flood hazard and exposed capital.

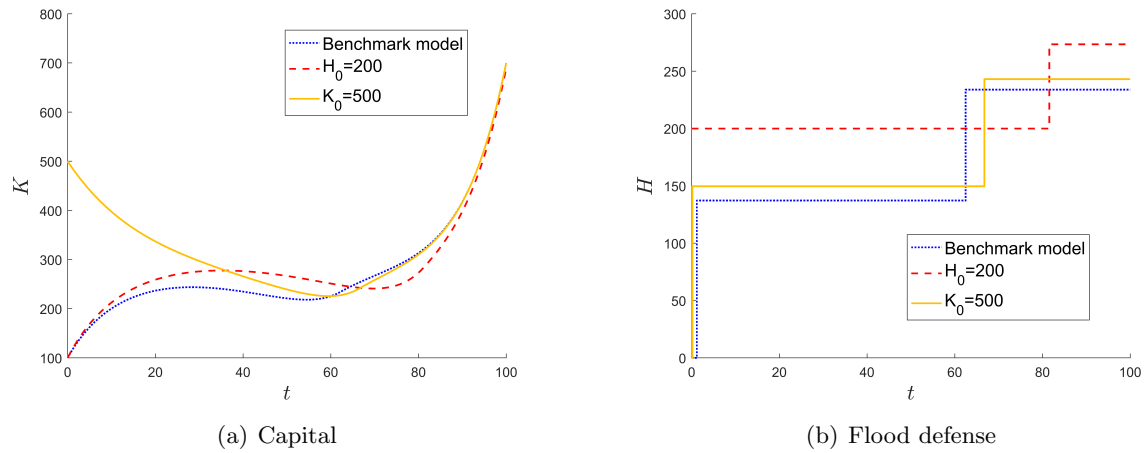


Figure 8: State dynamics for different economic situations: protected flood plain $H_0 = 200$ (dashed red line), benchmark model with $H_0 = 0$ and $K_0 = 10$ (dotted blue line) and capital intense firm $K_0 = 500$ (solid orange line).

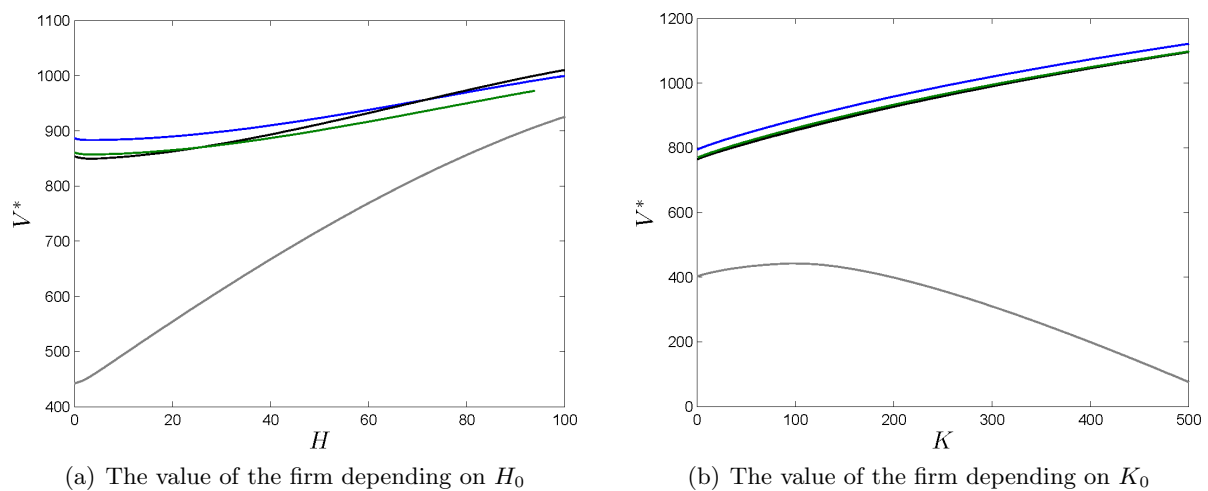


Figure 9: The net present value V^* of the firm increases for higher initial capital stocks. The colors indicate no impulse investments (grey), one impulse investment (black), two impulse investments (blue) and three impulse investments (green).

5.3 Sociohydrological feedbacks

Building flood risk protection measures often changes the environment and more specifically the water system. This can cause negative feedbacks for investing in flood defense like e.g. the levee effect or because after a flood it is more difficult for the water to stream back into the river and this raises flood damage. We investigate the effect of this feedbacks on the investment decision of the firm for a scenario with no feedback effects and a scenario with strong feedbacks.

If investment in flood protection affects the water system and increases flood risk, the expected value of the firm decreases dramatically for three reasons: First, firms choose a location

much farther away from the water to avoid this negative feedbacks. Second, a firm invests less and less often in flood defense, because it increases damage after the flood. Third, since the firm is less save and less profitable because it is located farther away from the water, it will invest less in productive capital, which again leads to a lower production output.

Fig.10 shows the value of the firm in case of no feedbacks ($\xi_H = 0$) and strong feedbacks ($\xi_H = 0.5$). In case of no feedbacks the firm chooses a location much closer to the river and invests three times in flood risk protection measures in almost equal time intervals.

If the feedbacks are strong the firm locates far away from the water and the value of the firm would not change much if it invests more or less often in flood defense. Still, it is optimal to invest twice. The first investment takes place already after a few years and the second investment is rather at the end of the planning horizon. Interestingly, the total amount of flood defense is almost as high as in the benchmark model, even though the location is much farther away.

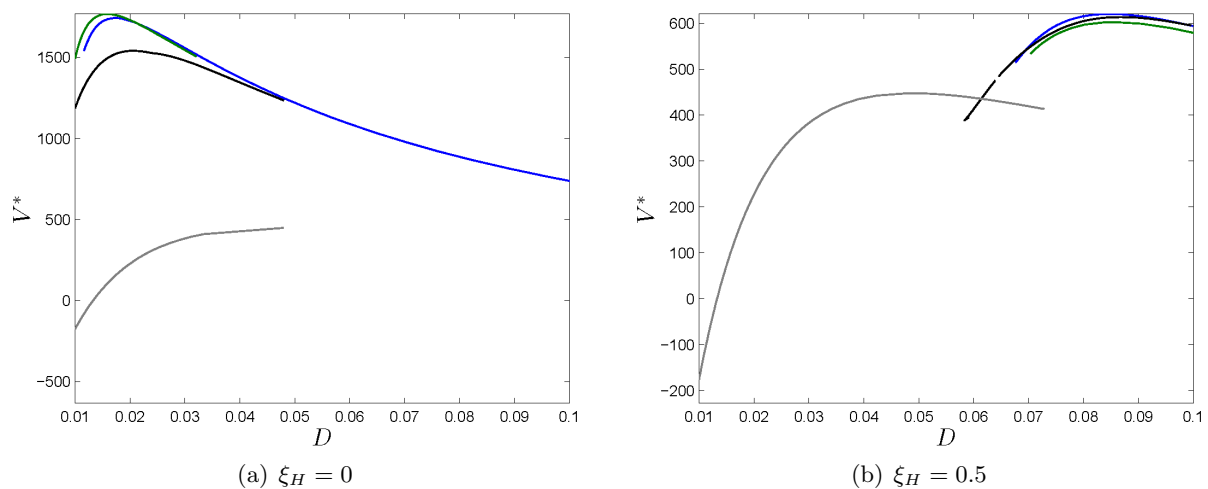


Figure 10: The net present value V^* depending on D for no impulse investments (grey), one impulse investment (black), two impulse investments (blue) and three impulse investments (green).

We notice that it plays a crucial role if the flood risk protection effects the environment consequently the water system which is the flood hazard for the firm. We conclude that the damage effect of the flood protection level plays a crucial role in affecting optimal firm behavior.

6 Conclusions

This paper provides the investment behaviour and location choice of a firm in a flood risk area within an optimal decision framework. In a first step, the firm chooses timing, number and amount of investments for impulse investments in flood risk protection measures, together with investment in its productive capital within a finite planning period. In a second step, the firm chooses the optimal location for its production plant in the flood risk area.

We present analytical and numerical solutions and analyse variations of these solutions under different parameterizations of the model. Sustainable investment planning of the firm leads not only to a safer environment with less flood risk, but also to economic growth both in the short and the long run. If the area is already protected against floods, firms still invest in flood defense, but less. And if the firm is more capital intensive potential damage is larger, but the timing and amount of impulse investments do not change.

Anthropogenic flood risk reduction can affect the environment resulting in changes of the water system and consequently again increase flood risk due to negative feedbacks. In this case, production output is much less and the firm decides to build its production far away from the water.

So far we have presented a qualitative numerical analysis of our model set up. It would be interesting in further work to numerically calibrate our model with empirical data from case studies.

Other topics of future research could be to introduce depreciation and maintenance of flood risk protection measures or to simulate random flooding events (e.g. Poisson distribution) like [Grames *et al.*, 2016] or [Viglione *et al.*, 2014] and imply them like shocks in the model of [Kuhn *et al.*, 2017].

Last but not least our partial equilibrium set up could be extended to a general equilibrium framework that also models the households behavior and government policies endogenously additional to the firm's optimal decisions.

7 Acknowledgements

The authors would like to acknowledge financial support from the Austrian Science Funds (FWF) as part of the Vienna Doctoral Programme on Water Resource Systems (DK-plus W1219-N22) and thank the colleagues Alberto Viglione and Linda Kuil within the doctoral programme for constructive feedbacks and discussions.

A Additional derivations and explanations

A.1 Necessary Optimality Conditions

We follow the work from [Chahim *et al.*, 2012] to derive the necessary optimality conditions for our maximization problem. We use the current value Hamiltonian form to incorporate the discounting.

To apply the Impulse Control Maximum Principle the functions $\pi_e(t)$ and $I_H(u_i, H(t))$ should be continuously differentiable in H and u_i on \mathbb{R}_+ , and $\frac{1}{r}\pi_e(T)$ should be continuously differentiable in $K(T)$ and $H(T)$ on \mathbb{R}_+ . Furthermore, $I_H(u_i, H(\tau^-))$ should be continuous in τ .

The maximization problem displayed in Eq.(17) yields the following current value Hamiltonian

$$Ham(K, I_K, \lambda_K, t) = \pi_e(K(t), D, H(t), I_K(t)) + \lambda_K[I_K(t) - \delta_K K(t)] \quad (28)$$

and the following current value Impulse Hamiltonian.

$$IHam(H, u, \lambda_H, t) = -I_H(u, H(t)) + \lambda_H u \quad (29)$$

The necessary optimality conditions in our model are as follows. For all $t \notin \{\tau_1, \dots, \tau_N\}$ it holds that

$$\frac{\partial Ham}{\partial I_K}(K, I_K, \lambda_K, t) = 0 \quad (30)$$

$$\frac{\partial Ham}{\partial K}(K, I_K, \lambda_K, t) = r\lambda_K - \dot{\lambda}_K \quad (31a)$$

$$\frac{\partial Ham}{\partial H}(K, I_K, \lambda_K, t) = r\lambda_H - \dot{\lambda}_H \quad (31b)$$

and for any $u \geq 0$

$$\frac{\partial IHam}{\partial u}(H, 0, \lambda_H, t)u \leq 0. \quad (32)$$

For the impulses $t \in \{\tau_1, \dots, \tau_N\}$ and non-negative heightenings $u \geq 0$ the following holds.

$$\frac{\partial IHam}{\partial u}(H(\tau_i^-), u_i, \lambda_H(\tau_i^+), \tau_i) = 0 \quad (33)$$

$$\lambda_H(\tau_i^+) - \lambda_H(\tau_i^-) = -\frac{\partial IHam}{\partial H}(H(\tau_i^-), u_i, \lambda_H(\tau_i^+), \tau_i) \quad (34a)$$

$$\lambda_K(\tau_i^+) - \lambda_K(\tau_i^-) = -\frac{\partial IHam}{\partial K}(H(\tau_i^-), u_i, \lambda_H(\tau_i^+), \tau_i) = 0 \quad (34b)$$

At the end of the time interval the transversality conditions

$$\lambda_K(T^+) = \frac{1}{r} \frac{\partial \pi_e}{\partial K}(K(T^+), H(T^+)) \quad (35a)$$

$$\lambda_H(T^+) = \frac{1}{r} \frac{\partial \pi_e}{\partial H}(K(T^+), H(T^+)) \quad (35b)$$

hold with $K(T^+) = K(T)$ and $H(T^+) = H(T)$ if there is no jump at time T and $\tau_1 < \tau_2 < \dots < \tau_N \leq T$.

A.2 Derivation of equations for Section 3.4

From the condition (30) we obtain

$$\lambda_K = (1 - P_F(D, H))2\alpha_K I_K. \quad (36)$$

Taking the logarithm and time derivative and combining it with the result from (31a) leads to the following optimal dynamics of the investment in physical capital between the impulse investments shown in (18).

Solving the differential equation from condition (31a) for λ_K , using the transversality condition (22a) and Eq.(36) yields the net present value for the expected optimal investment in physical capital $I_K(t)$ expressed in Eq.(19).

The necessary condition (31b) yields the dynamics of the shadow price for investment in flood defense capital.

$$\begin{aligned} \dot{\lambda}_H = & r\lambda_H - P_F(D, H)\alpha_F\left(1 - \frac{\xi_H}{\alpha_D(D_0 + D)}\right)[Y(K, D) - \alpha_K I_K^2 - F(D, H)] \\ & + P_F(D, H)(1 - F(D, H))\left(\frac{\xi_H}{\alpha_D(D_0 + D)}\right) \end{aligned} \quad (37)$$

We can solve that differential equation (37) using the transversality condition (22b) to obtain Eq.(??).

A.3 Derivation of \bar{H}

We know investment is only optimal if marginal gain (22b) is at least equal to marginal costs (23) at time T^+ . The resulting equation

$$\begin{aligned} & \frac{1}{r}P_F(D, H)\left[\alpha_F\left(1 - \frac{\xi_H}{\alpha_D(D_0 + D)}\right)[Y - \alpha_K I_K^2 + F(D, H)K] - \frac{\xi_H}{\alpha_D(D_0 + D)}[1 - F(D, H)]K\right] \\ = & (\tilde{\theta}_1 + \tilde{\theta}_2 u_i) \exp(\theta_3(H(\tau^-) + u_i)) \end{aligned} \quad (38)$$

ensures that an upper bound \bar{H} exists, because the left hand/ the right hand side of the equation converges to $0 / \infty$ for $H \rightarrow \infty$, respectively. We define $A := \alpha_F(1 - \xi_H)Y + \alpha_F(1 - \xi_H)F(D, H)K - \frac{\xi_H}{\alpha_D(D_0 + D)}[1 - F(D, H)]K$ and find a $\bar{A} \geq A$ at T^+ with $\bar{A} = \alpha_F(1 - \xi_H)(K + Y)$. \bar{A} is constant at T^+ . Since we know that \bar{H} still holds for increased marginal gain or decreased marginal costs, we can reduce Eq.(38) to

$$\frac{1}{r}P_0 \exp\left(\alpha_F\left(\frac{W_0 + \eta T^+}{\alpha_D(D_0 + D)} - \left(1 - \frac{\xi_H}{\alpha_D(D_0 + D)}\right)\bar{H}\right)\alpha_F\left(1 - \frac{\xi_H}{\alpha_D(D_0 + D)}\right)(Y + K)\right) = \theta_1 \theta_3 \exp(\theta_3 \bar{H}) \quad (39)$$

and derive \bar{H} .

B Numerical solution

To apply the continuation algorithm introduced in Section 4 we have to derive the model dynamics explicitly. For convenience we do not write the time argument t to the dynamic variables $K, H, \lambda_K, \lambda_H, I_K$.

To avoid a positive product caused by two negative factors $(1 - P_F)$ and $(Y - \alpha_K I_K^2)$ and to ensure that $(1 - P_F) \in [0, 1]$ we approximate the term $(1 - P_F)$ with $\frac{1}{1 + \alpha_P P_F}$.

We use the following short notations.

$$Y(K, L, D) = K^\alpha \frac{1}{(D_0 + D)} \quad (40a)$$

$$\begin{aligned} \pi_e(K, D, H, I_K) &= \frac{1}{1 + \alpha_P P_F} [Y(K, D) - \alpha_K I_K^2] \\ &\quad - P_F(H, D) F(H, D) K \end{aligned} \quad (40b)$$

$$P_F(H, D) = P_0 \exp[\alpha_F (\frac{W_0 + \eta t}{\alpha_D (D_0 + D)} - (1 - \frac{\xi_H}{\alpha_D (D_0 + D)}) H)] \quad (40c)$$

$$F(H, D) = 1 - \exp(-\frac{W + \xi_H H}{\alpha_D (D_0 + D)}) \quad (40d)$$

$$I_H(u, H(\tau^-)) = (\theta_1 + \theta_2 u) \exp(\theta_3 (H(\tau^-) + u)) \quad (40e)$$

Note, Eq.(40e) is only used for u strictly positive.

We can summarize the canonical system dynamics for $t \in (\tau_{i-1}, \tau_i)$ with $i \in \{1, \dots, N + 1\}$.

$$\dot{K} = I_K - \delta_K K \quad (41a)$$

$$\dot{H} = 0 \quad (41b)$$

$$\dot{\lambda}_K = (r + \delta_K) \lambda_K - \alpha \frac{1}{1 + \alpha_P P_F} \frac{Y(K, L, D)}{K} + P_F(H, D) F(H, D) \quad (41c)$$

$$\begin{aligned} \dot{\lambda}_H &= r \lambda_H - P_F(D, H) \alpha_F (1 - \frac{\xi_H}{\alpha_D (D_0 + D)}) [Y(K, D) - \alpha_K I_K^2 - F(D, H)] \\ &\quad + P_F(D, H) (1 - F(D, H)) (\frac{\xi_H}{\alpha_D (D_0 + D)}) \end{aligned} \quad (41d)$$

$$\begin{aligned} \dot{I}_K &= I_K [r + \delta_K - \frac{\alpha}{\lambda_K} \frac{1}{1 + \alpha_P P_F} \frac{Y(K, L, D)}{K} + \frac{1}{\lambda_K} P_F(H, D) F(H, D) \\ &\quad + \frac{\alpha_F}{\lambda_K} \frac{P_F(H, D)}{1 - P_F(H, D)} \frac{\eta}{\alpha_D (D_0 + D)}] \end{aligned} \quad (41e)$$

Moreover, we rewrite the conditions for the jump points τ_i with $i \in \{1, \dots, N\}$.

$$H(\tau_i^+) - H(\tau_i^-) - u_i = 0 \quad (42a)$$

$$\lambda_H(\tau_i^+) - (\tilde{\theta}_1 + \tilde{\theta}_2 u_i) \exp(\theta_3 (H(\tau^-) + u_i)) = 0 \quad (42b)$$

$$\lambda_H(\tau_i^+) - \lambda_H(\tau_i^-) - (\tilde{\theta}_3 + \tilde{\theta}_2 u_i) \exp(\theta_3 (H(\tau^-) + u_i)) = 0 \quad (42c)$$

$$\begin{aligned} &\pi_e(K(\tau_i), H(\tau_i^+), I_K(\tau_i^+)) - \pi_e(K(\tau_i), H(\tau_i^+), I_K(\tau_i^-)) \\ &+ \lambda_K(\tau_i^+) [I_K(\tau_i^+) - \delta_K K(\tau_i^+)] - \lambda_K(\tau_i^-) [I_K(\tau_i^-) - \delta_K K(\tau_i^-)] \\ &\quad - r I_H(u_i, H(\tau_i^-)) = 0 \end{aligned} \quad (42d)$$

We solve the conditions for every interval assuming $0 < \tau_1 < \tau_2 < \dots < \tau_N < \tau_{N+1} = T$. The

starting values are

$$K(0) = K_0 \quad (43a)$$

$$H(0^-) = 0 \quad (43b)$$

and at the end T the transversality conditions have to hold. Note, that here the time argument for all the dynamic variables is time T .

$$\frac{1}{r} \left[\alpha \frac{[1 - P_F(H, D)]Y(K, D)}{K} - P_F(H, D)F(H) \right] - \lambda_K = 0 \quad (43c)$$

$$\frac{1}{r} P_F(H, D) \left[\alpha_F \left(1 - \frac{\xi_H}{\alpha_D(D_0 + D)} \right) (Y(K, D) - \alpha_K I_K^2 + F(H, D)K) \right] - \lambda_H = 0 \quad (43d)$$

C References

References

- [Barles, 1985] Barles, G. 1985. Deterministic Impulse Control Problems. *SIAM Journal on Control and Optimization*, **23**(3), 419–14. Copyright - Copyright] © 1985 Society for Industrial and Applied Mathematics; Zuletzt aktualisiert - 2012-03-03.
- [Barucci, 1998] Barucci, Emilio. 1998. Optimal investments with increasing returns to scale. *International Economic Review*, 789–808.
- [Blaquière, 1985] Blaquière, A. 1985. Impulsive optimal control with finite or infinite time horizon. *Journal of Optimization Theory and Applications*, **46**(4), 431–439.
- [Brito, 2004] Brito, Paulo. 2004. *The Dynamics of Growth and Distribution in a Spatially Heterogeneous World*. Tech. rept.
- [Chahim et al., 2012] Chahim, Mohammed, Hartl, Richard F., & Kort, Peter M. 2012. A tutorial on the deterministic Impulse Control Maximum Principle: Necessary and sufficient optimality conditions. *European Journal of Operational Research*, **219**(1), 18 – 26.
- [Chahim et al., 2013] Chahim, Mohammed, Brekelmans, Ruud, den Hertog, Dick, & Kort, Peter. 2013. An impulse control approach to dike height optimization. *Optimization Methods and Software*, **28**(3), 458–477.
- [Collenteur et al., 2015] Collenteur, R. A., de Moel, H., Jongman, B., & Di Baldassarre, G. 2015. The failed-levee effect: Do societies learn from flood disasters? *Natural Hazards*, **76**(1), 373–388.
- [Davidson & Harris, 1981] Davidson, Russell, & Harris, Richard. 1981. Non-convexities in continuous-time investment theory. *The Review of Economic Studies*, **48**(2), 235–253.
- [Di Baldassarre G., 2013] Di Baldassarre G., Viglione A., Carr G. Kuil L. Salinas J. L. Bloeschl G. 2013. Socio-hydrology: conceptualising human-flood interactions. *Hydrology and Earth System Sciences*, **17**(8), 3295–3303. doi:10.5194/hess-17-3295-2013.
- [Easterling et al., 2000] Easterling, D. R., Evans, J. L., Groisman, P. Ya, Karl, T. R., Kunkel, K. E., & Ambenje, P. 2000. Observed Variability and Trends in Extreme Climate Events: A Brief Review. *Bulletin of the American Meteorological Society*, **81**(3), 417–425.
- [Eijgenraam et al., 2012] Eijgenraam, C., Brekelmans, R., den Hertog, D., & Roos, K. 2012. Flood Prevention by Optimal Dike Heightening. *Delft University of Technology, the Netherlands, Working Paper*.
- [Eijgenraam et al., 2014] Eijgenraam, C., Kind, J., Bak, C., Brekelmans, R., den Hertog, D., Duits, M., Roos, K., Vermeer, P., & Kuijken, W. 2014. Economically Efficient Standards to Protect the Netherlands Against Flooding. *Interfaces*, **44**(1), 7–21.
- [Eijgenraam, 2016] Eijgenraam, Carel, Roos C. Brekelmans Ruud Hertog Dick den. 2016. Optimal strategies for flood prevention. *Management Science*, **In Press**.
- [Eisner et al., 1963] Eisner, Robert, Strotz, Robert Henry, & Post, George Richard. 1963. *Determinants of business investment*. Prentice-Hall.

- [El Farouq *et al.*, 2010] El Farouq, Naïma, Barles, Guy, & Bernhard, Pierre. 2010. Deterministic Minimax Impulse Control. *Applied Mathematics and Optimization*, **61**(3), 353–378.
- [Glatte, 2015] Glatte, Thomas. 2015. Location strategies: methods and their methodological limitations. *Journal of Engineering, Design and Technology*, **13**(3), 435–462.
- [Goette, 1994] Goette, T. 1994. Standortpolitik internationaler Unternehmen (Site Policy of International Corporations). *Deutscher Universitätsverlag, Wiesbaden*.
- [Grames *et al.*, 2016] Grames, Johanna, Prskawetz, Alexia, Grass, Dieter, Viglione, Alberto, & Blöschl, Günter. 2016. Modeling the interaction between flooding events and economic growth. *Ecological Economics*, **129**, 193 – 209.
- [Grass, 2017] Grass, D. 2017. Continuation Algorithm. *Working Paper, TU Wien*.
- [Grass & Chahim, 2012] Grass, D., & Chahim, M. 2012. *Numerical algorithms for deterministic impuls control models with applications*.
- [Grass *et al.*, 2012] Grass, Dieter, Hartl, Richard F, & Kort, Peter M. 2012. Capital accumulation and embodied technological progress. *Journal of Optimization Theory and Applications*, **154**(2), 588–614.
- [Hunt & Watkiss, 2011] Hunt, A., & Watkiss, P. 2011. Climate change impacts and adaptation in cities: a review of the literature. *Climatic Change*, **104**(1), 13–49.
- [Johnson & Priest, 2008] Johnson, Clare L., & Priest, Sally J. 2008. Flood Risk Management in England: A Changing Landscape of Risk Responsibility? *International Journal of Water Resources Development*, **24**(4), 513–525.
- [Jonkman *et al.*, 2004] Jonkman, S.N., Brinkhuis-Jak, M., & Kok, M. 2004. Cost benefit analysis and flood damage mitigation in the Netherlands. *Heron*, **49** (1). uuid:8507e21d-8427-4ba5-9a15-329237ada846.
- [Kuhn *et al.*, 2017] Kuhn, M., Frankovic, I., & Wrzaczek, S. 2017. Life-cycle behaviour in the phase of large shocks to health. *Wittgenstein Centre (OeAW/VID, IIASA, WU), OeAW/VID, and University of Vienna, Department of Business Administration, Working Paper*.
- [Leiter *et al.*, 2009] Leiter, Andrea M., Oberhofer, Harald, & Raschky, Paul A. 2009. Creative Disasters? Flooding Effects on Capital, Labour and Productivity Within European Firms. *Environmental and Resource Economics*, **43**(3), 333–350.
- [Lichfield, 1960] Lichfield, N. 1960. Cost-Benefit Analysis in City Planning. *Journal of the American Institute of Planners*, **26**(4), 273–279.
- [Lumpkin & Dess, 2001] Lumpkin, G.T., & Dess, Gregory G. 2001. Linking two dimensions of entrepreneurial orientation to firm performance: The moderating role of environment and industry life cycle. *Journal of Business Venturing*, **16**(5), 429 – 451.
- [Mechler *et al.*, 2014] Mechler, R., Czajkowski, J., Kunreuther, H., Michel-Kerjan, E., Botzen, W., Keating, A., McQuistan, C, Cooper, N., & O'Donnell, I. 2014. Making Communities More Flood Resilient: The Role of Cost Benefit Analysis and Other Decision-support Tools in Disaster Risk Reduction. *White Paper, Zurich Flood Resilience Alliance*.

- [Merz *et al.*, 2010] Merz, B., Kreibich, H., Schwarze, R., & Thieken, A. 2010. Review article "Assessment of economic flood damage". *Natural Hazards and Earth System Sciences*, **10**(8), 1697–1724.
- [Parkatti, 2013] Parkatti, M. 2013. Impact of Southern Alberta Flooding on Hours Worked and GDP. *Economic Commentary, Alberta Enterprise Advanced Education*, September. 780-415-4880.
- [Rempala & Zabczyk, 1988] Rempala, R., & Zabczyk, J. 1988. On the maximum principle for deterministic impulse control problems. *Journal of Optimization Theory and Applications*, **59**(2), 281–288.
- [Sayers *et al.*, 2002] Sayers, P. B., Hall, J. W., & Meadowcroft, I. C. 2002. Towards risk-based flood hazard management in the UK. *Proceedings of the Institution of Civil Engineers - Civil Engineering*, **150**(5), 36–42.
- [Turner *et al.*, 1996] Turner, R. K., Subak, S., & Adger, W. N. 1996. Pressures, trends, and impacts in coastal zones: Interactions between socioeconomic and natural systems. *Environmental Management*, **20**(2), 159–173.
- [Veen & Logtmeijer, 2005] Veen, Anne Van Der, & Logtmeijer, Christiaan. 2005. Economic Hotspots: Visualizing Vulnerability to Flooding. *Natural Hazards*, **36**(1), 65–80.
- [Viglione *et al.*, 2014] Viglione, A., Di Baldassarre, G., Brandimarte, L., Kuil, L., Carr, G., Salinas, J. L., & Blöschl, G. 2014. Insights from socio-hydrology modelling on dealing with flood risk - Roles of collective memory, risk-taking attitude and trust. *Journal of Hydrology*, **1–12**. doi:10.1016/j.jhydrol.2014.01.018.
- [Vörösmarty *et al.*, 2000] Vörösmarty, CJ, Green, P, Salisbury, J, & Lammers, RB. 2000. Global water resources: vulnerability from climate change and population growth. *Science (New York, N.Y.)*, **289**(5477), 284—288.
- [Wald, 2011] Wald, M.L. 2011. Nebraska Nuclear Plant's Vital Equipment Remains Dry, Officials Say. *The New York Times*, June.
- [Zwaneveld & Verweij, 2014] Zwaneveld, P.J., & Verweij, G. 2014. Safe Dike Heights at Minimal Costs: An Integer Programming Approach. *CPB Netherlands Bureau for Economic Policy Analysis*, **Discussion Paper**(May).

Published Working Papers

- WP 01/2017:** Optimal investment and location decisions of a firm in a flood risk area using Impulse Control Theory
- WP 11/2016:** Hyperbolic Discounting Can Be Good For Your Health
- WP 10/2016:** On the long-run growth effect of raising the retirement age
- WP 09/2016:** The importance of institutional and organizational characteristics for the use of fixed-term and agency work contracts in Russia
- WP 08/2016:** A Structural Decomposition Analysis of Global and National Energy Intensity Trends
- WP 07/2016:** Natural Disasters and Macroeconomic Performance
- WP 06/2016:** Education, lifetime labor supply, and longevity improvements
- WP 05/2016:** The Gender Gap in Mortality: How Much Is Explained by Behavior?
- WP 04/2016:** The implications of automation for economic growth and the labor share of income
- WP 03/2016:** Higher education and the fall and rise of inequality
- WP 02/2016:** Medical Care within an OLG economy with realistic demography
- WP 01/2016:** The Quest for Status and R&D-based Growth
- WP 04/2015:** Modelling the interaction between flooding events and economic growth
- WP 03/2015:** Revisiting the Lucas Model
- WP 02/2015:** The contribution of female health to economic development
- WP 01/2015:** Population Structure and Consumption Growth: Evidence from National Transfer Accounts
- WP 02/2014:** Economic Dependency Ratios: Present Situation and Future Scenarios
- WP 01/2014:** Longevity and technological change
- WP 02/2013:** Saving the public from the private? Incentives and outcomes in dual practice
- WP 01/2013:** The Age-Productivity Pattern: Do Location and Sector Affiliation Matter?
- WP 05/2012:** The Public Reallocation of Resources across Age: A Comparison of Austria and Sweden
- WP 04/2012:** Quantifying the role of alternative pension reforms on the Austrian economy
- WP 03/2012:** Growth and welfare effects of health care in knowledge based economies
- WP 02/2012:** Public education and economic prosperity: semi-endogenous growth revisited

More working papers can be found at <http://www.econ.tuwien.ac.at/wps/>

Please cite working papers from the ECON WPS like this example:

Freund, I., B. Mahlberg and A. Prskawetz. 2011. "A Matched Employer-Employee Panel Data Set for Austria: 2002-2005." *ECON WPS 01/2011*. Institute of Mathematical Methods in Economics, Vienna University of Technology.

**The Series “Vienna University of Technology Working Papers
in Economic Theory and Policy” is published by the**

Research Group Economics
Institute of Statistics and Mathematical Methods in Economics
Vienna University of Technology

Contact

Research Group Economics
Institute of Statistics and Mathematical Methods in Economics
Vienna University of Technology

Wiedner Hauptstraße 8-10
1040 Vienna
Austria

Editorial Board

Alexia Fürnkranz-Prskawetz
Hardy Hanappi
Franz Hof

Phone: +43-1-58801-1053- 1
Fax: +43-1-58801-1053-99
E-mail: wps@econ.tuwien.ac.at